

MODUL'EAU

2022 COMMERCIAL SHEET



- Digital display, visual and audible alarm
- 316 L stainless steel chamber
- Maximum pressure : 6 bars
- Water temperature 0 to 40 °C
- Visual control cell
- Connection in opposite axis
- Domed quartz sleeve
- Metal construction mounting plate
- Electronic ballast block
- Single ended Lamp 9 000 h
- Green and red lamp status LEDs
- Daily count and reset switch
- Lamp fault buzzer
- 220 V + T power cord
- Version with integrated filter holder: optional cartridges.

Applications


- Raw water potabilisation (drilling, catchments, wells...)
- Rainwater securisation (sanitary appliance only)
- Network water securisation

Spare parts

- UVC Lamps : 9 000 hours
- O-ring : 9 000 hours
- Sleeve : 5 years



*Non-contractual pictures**

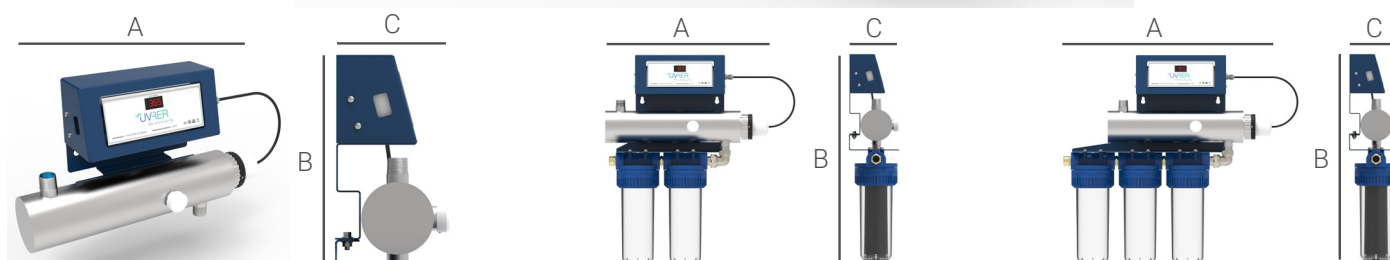


System	Electrical power consumption	Weight	Dimensions			
			A	B	C	
MODUL'EAU 36 NO FILTERS	38 Wh	9 Kg	460	275	140	
MODUL'EAU 60 NO FILTERS	62 Wh					
MODUL'EAU 36 2 FILTERS	38 Wh		460	581		
MODUL'EAU 60 2 FILTERS	62 Wh					
MODUL'EAU 36 3 FILTERS	38 Wh		580	581		
MODUL'EAU 60 3 FILTERS	62 Wh					


System	Reference	Max flow rate*	Power	In/Out	Filters**
NO FILTER VERSION					
MODUL'EAU 36 NO FILTERS	1050001	1,88 m³/h	1x36 W	3/4"	-
MODUL'EAU 60 NO FILTERS	1050002	3,71 m³/h	1x60 W		
2 FILTERS VERSION					
MODUL'EAU 36 2 FILTERS	1050003	1,88 m³/h	1x36 W	3/4"	2x9"3/4
MODUL'EAU 60 2 FILTERS	1050004	3,71 m³/h	1x60 W		
3 FILTERS VERSION					
MODUL'EAU 36 3 FILTERS	1050005	1,88 m³/h	1x36 W	3/4"	3x9"3/4
MODUL'EAU 60 3 FILTERS	1050006	3,71 m³/h	1x60 W		

(*) Flow rates above expressed with a UVC transmission coefficient of 98% on a 1 cm water slide for a germicidal dose delivered of 40 mJ / cm² at the end of lamp life. **delivered without filter cartridges

Lamp & quartz sleeve

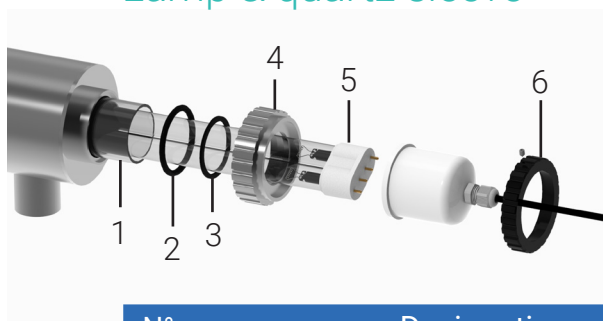

Control cell kit

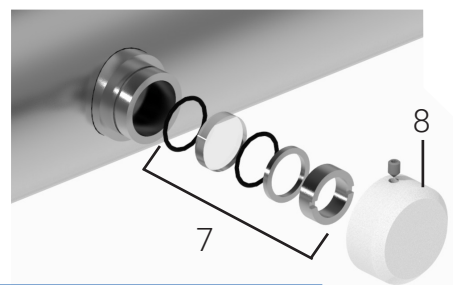

N°	Designation	Reference
MODUL'EAU 36 (old version)		
5	PLL lamp 36W	2110016
1	Quartz sleeve D44GEUR18/36FB	2220004
14	Electronic ballast 18/36	2420001
MODUL'EAU 55 (old version)		
5	PLL lamp 55W	2110017
1	Quartz sleeve D44GEUR55/95FB	2220005
14	Electronic ballast 55/80	2420002
MODUL'EAU 60 (old version)		
5	PLL lamp 60W	2110018
1	Quartz sleeve D44GEUR18/36FB	2220004
14	Electronic ballast 55/80	2420002
MODUL'EAU 36 / 60 (new version)		
2	O-ring Ø44	2510006
3	Flat seal Ø45	2510002
4	Stainless gland seal Ø44	2520001
6	Lamp blocking ring	2530001
7	Visual control kit DOM	2540001
8	White look cover screw	2550001
Complete block ballast kit EUREKAMOB 36		2310001
Complete block ballast kit EUREKAMOB 95		2310003