




### 1. USE

Cable for high-speed VDI transmission networks

802.3 bt PoE++ up to type 4 applications compatible according to installation standards ISO/IEC 14763-2 : 2019 and EN 50174-2 : 2018

### 2. DESCRIPTION

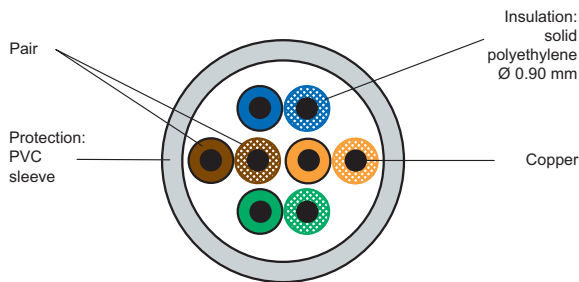

### MARKING AND PACKAGING

Marking of Legrand cables

- LEGRAND
- Catalogue number
- Number of pairs
- Gauge
- Type
- Impedance
- Type of sleeve
- Category
- Conformity to standards
- EUROCLASS
- Velocity of propagation
- Traceability
- Measurement (remaining length in metres).

Complementary marking (on label)

- Designation
- Made in....

### 3. PERFORMANCE AT 100 MHZ (STAND. ANSI/TIA 568.2-D)

Catalogue number	0 327 51
Maximum attenuation (dB/100 m)	22
Minimum NEXT (dB)	35,3
PS NEXT (dB)	32,3
ACRF (dB / 100 m)	23,8
PS ACRF (dB / 100 m)	20,8
Return Loss (dB)	20,1

### 4. TECHNICAL AND MECHANICAL FEATURES

Catalogue number	0 327 51
Type	U/UTP
Type of sleeve	PVC
Number of pairs	4
Assembly	Pairs
Diameter over insulation (mm)	0,88±0.02
Average nominal diameter of the cable (mm)	4,6 ± 0,6
Weight of cable (kg/km)	28 à 32
Min. bending radius when laying (mm)	20
AWG gauge*	24

\* According to UL 444 ed.3 table 4

**5. ELECTRICAL FEATURES AT 20°C**

Catalogue number	0 327 51
Type	U/UTP
Maximum linear resistance (ohm/km)	95 *
DC dielectric strength	1 KV / 1 min *
Minimum insulation resistance (Mohm.km)	5000
Minimum propagation speed	66 %
Characteristic impedance at 100 MHz	100 ±5Ω

\* According to standard IEC 61156-5

**6. ORDERING INFORMATION**

Catalogue number	0 327 51
Type	U/UTP
Colour	Grey RAL 7035
Pack (m)	305
Packaging	Box

**7. ENVIRONMENTAL FEATURES**

Transport and storage temperature: 0 at + 50 °C

Storage temperature before use: 10°C during 24h (if stock ≤ 5°C )

Usage temperature: - 20 to + 60 °C

Fire rating : IEC 60332-1-2, EN 60332-1-2

EUROCLASS EN 13501-6 = Class Eca

**8. STANDARDS AND APPROVALS**

Cat 5e, 100 MHz

Electrical performances and characteristics :

- ANSI/TIA 568-C.2

- EN 50173-1

- EN 50288-3-1

- ISO/IEC 11801 (ed. 2.2)

- IEC 61156-5

IEEE 802.3bt : PoE++