


1. USE

Cable for high-speed VDI transmission networks

802.3 bt PoE++ up to type 4 applications compatible according to installation standards ISO/IEC 14763-2 : 2019 and EN 50174-2 : 2018

2. DESCRIPTION

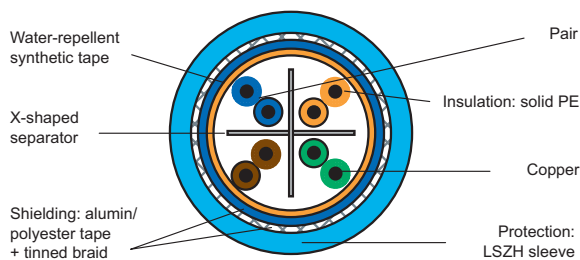

Note : The conductive part of the shielding is located on the wire side

3. MARKING AND PACKAGING

Marking of Legrand cables

- LEGRAND
- Catalogue number
- Number of pairs
- Gauge
- Type
- Impedance
- Type of sleeve
- Category
- Conformity to standards
- EUROCLASS
- Velocity of propagation
- Traceability
- Measurement (remaining length in metres).

Complementary marking (on label)

- Designation
- Made in....

4. PERFORMANCE AT 250 MHZ (STAND. ANSI/TIA 568.2-D)

Reference	0 327 57
Maximum attenuation (dB/100 m)	32,8
Minimum NEXT (dB)	38,3
PS NEXT (dB)	36,3
ACRF (dB / 100 m)	19,8
PS ACRF (dB / 100 m)	16,8
Return Loss (dB)	17,3

5. TECHNICAL AND MECHANICAL FEATURES

Catalogue number	0327 57
Type	SF/UTP
Type of sleeve	LSZH
Number of pairs	4
Assembly	Pairs
Diameter over insulation (mm)	1,1±0.1
Average nominal diameter of the cable (mm)	8,1±0.3
Weight of cable (kg/km)	65
Min. bending radius when laying (mm)	65
AWG gauge*	23

* According to UL 444 ed.3 table 4

6. ELECTRICAL FEATURES AT 20°C

Catalogue number	0 327 57
Type	SF/UTP
Maximum linear resistance (ohm/km)	83.4*
DC dielectric strength	1 KV / 1 min *
Minimum insulation resistance (Mohm.km)	5000
Minimum propagation speed	> 66%
Characteristic impedance at 100 MHz	100 ±5Ω

* According to standard IEC 61156-5

7. ORDERING INFORMATION

Catalogue number	0 327 57
Type	SF/UTP
Colour	Blue RAL 5015
Pack (m)	500
Packaging	Reel

8. ENVIRONMENTAL FEATURES

Transport and storage temperature: 0 à + 50 °C
 Storage temperature before use: 10°C during 24h (if stock ≤ 5°C)
 Usage temperature: - 20 à + 60 °C

Fire rating:EN 50399, IEC 60332-1-2, EN 60332-1-2
 Smoke density : IEC 61034-2, EN 61034-2
 Toxicity of fire effluent : IEC 60754-2, EN 60754-2

EUROCLASS EN 13501-6 = Class Dca s2d2a1
 Also compliant with Eca

9. STANDARDS AND APPROVALS

Cat 6, 250 MHz
 Electrical performances and characteristics :
 - ANSI/TIA 568.2-D
 - EN 50173-1
 - EN 50288-5-1
 - ISO/IEC 11801 (ed. 2.2)
 - IEC 61156-5
 IEEE 802.3bt : PoE++