

# PRODUCT DATASHEET

## P PAR30 DIM 75 36° 10.5 W/2700K E27

PARATHOM DIM PAR30 | Dimmable LED reflector lamps PAR30 with retrofit screw base



---

### AREAS OF APPLICATION

- Display cabinets and shop windows
- Museums, art galleries
- Exhibition rooms
- Hospitality
- Residential interiors
- As a downlight for marking walkways, doors, stairs, etc.
- Outdoor applications only in suitable luminaires

---

### PRODUCT BENEFITS

- Low energy consumption
- Easy replacement of halogen lamps thanks to compact design
- Instant 100 % light, no warm-up time

---

### PRODUCT FEATURES

- Professional LED alternative to PAR30 lamps
- Good color rendering index  $R_a \geq 80$
- Dimmable (with many common dimmers, see also [www.ledvance.com/dim](http://www.ledvance.com/dim))
- Mercury-free lamps



## TECHNICAL DATA

### Electrical data

Rated wattage	10.50 W
Nominal wattage	10.50 W
Nominal voltage	220...240 V
Claimed equiv. conventional lamp power	75 W
Max. lamp no. on circuit break. 10 A (B)	67
Max. lamp no. on circuit break. 16 A (B)	108
Operating frequency	50...60 Hz
Power factor $\lambda$	$\geq 0.70$


### Photometrical data

Nominal luminous flux	633 lm
Rated luminous flux	633 lm
Rated color temperature	2700 K
Lumen main.fact.at end of nom.life time	0.70
Light color (designation)	Warm White
Color temperature	2700 K
Luminous flux	633 lm
Color rendering index Ra	$\geq 80$
Standard deviation of color matching	$\leq 6$ sdc
Color rendering index Ra	$\geq 80$
Nominal useful luminous flux 90°	633 lm
Rated useful luminous flux 90°	633 lm
Rated peak intensity	1700 cd

### Light technical data

Beam angle	36 °
Warm-up time (60 %)	< 0.50 s
Starting time	< 0.5 s
Nominal beam angle	36 °
Rated beam angle (half peak value)	36.00 °

## Dimensions &amp; weight



<b>Overall length</b>	90.0 mm
<b>Diameter</b>	95.0 mm
<b>Outer bulb</b>	PAR95
<b>Length</b>	90.0 mm
<b>Maximum diameter</b>	95.0 mm

## Temperatures &amp; operating conditions

<b>Maximum temperature at tc test point</b>	75 °C
---	-------

## Lifespan

<b>Nominal lamp life time</b>	25000 h
<b>Rated lamp life time</b>	25000 h
<b>Number of switching cycles</b>	100000

## Additional product data

<b>Base (standard designation)</b>	E27
<b>Mercury content</b>	0.0 mg
<b>Mercury-free</b>	Yes
<b>Show WEEE picto</b>	Yes
<b>Product remark</b>	All technical parameters apply to the entire lamp/Due to the complex production process for light-emitting diodes, the typical values shown for the technical LED parameters are purely statistical values that do not necessarily match the actual technical parameters of each individual product, which can vary from the typical value

## Capabilities

<b>Dimmable</b>	Yes
-----------------	-----

## Certificates &amp; standards



<b>Energy efficiency class</b>	A
--------------------------------	---

<b>Energy consumption</b>	11 kWh/1000h
---------------------------	--------------

Country-specific categorizations

<b>Order reference</b>	LPPAR30D7536 10
------------------------	-----------------

Light Distribution

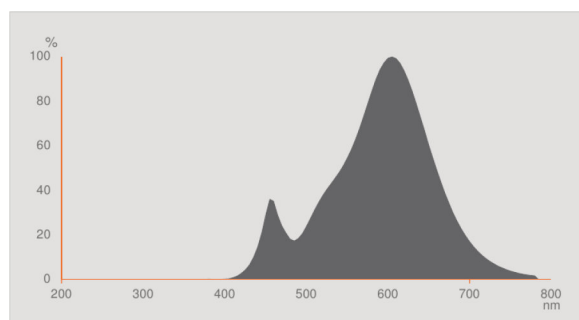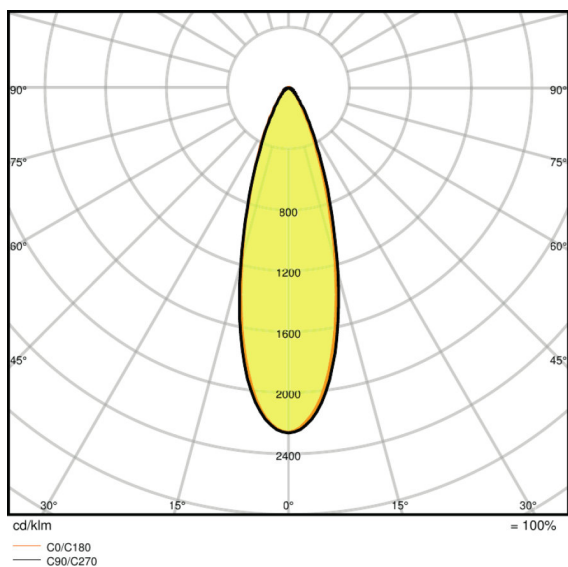

LDC typ polar

Spectral power distribution

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075105430	Folding carton box 1	100 mm x 100 mm x 149 mm	248.00 g	1.49 dm <sup>3</sup>
4058075105447	Shipping carton box 6	312 mm x 211 mm x 163 mm	1576.00 g	10.73 dm <sup>3</sup>

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

REFERENCES / LINKS

For dimming conformity see

- ▶ [www.ledvance.com/dim](http://www.ledvance.com/dim)

For further products and actual information concerning LED lamps see

- ▶ [www.ledvance.com/ledlamps](http://www.ledvance.com/ledlamps)

For Guarantee see

▶ [www.ledvance.com/guarantee](http://www.ledvance.com/guarantee)

---

**DISCLAIMER**

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.