


AFDD - Mounting instruction





Assembly instructions
Montageanweisung
Instructions de montage
Montážní návod
Montážni návod
Montagevejledning
Instrucciones de montaje
Szerelési utasítás
Istruzioni di montaggio
Montasjeveledning
Montage instructie
Instruções de montagem
Instrukcja montażu
Montageanvisning
Asennusohjeet
Montaj talimatı
Instrucţiuni de montaj
Инструкция по монтажу
οδηγία συναρµολόγησης
安裝說明書
تعليمات التركيب





Danger
Lebensgefahr
Danger de mort
Nebezpečí
Nebezpečenstvo
Fare
Perigo
Életveszély
Pericolo di morte
Fare
Levensgevaar
Perigo
Niebezpieczeństwo
Varning
Vaara
Hayati Tehlike
Pericol
Οπικότητα κίνδυνος θανάτου
危險
خطر على الحياة

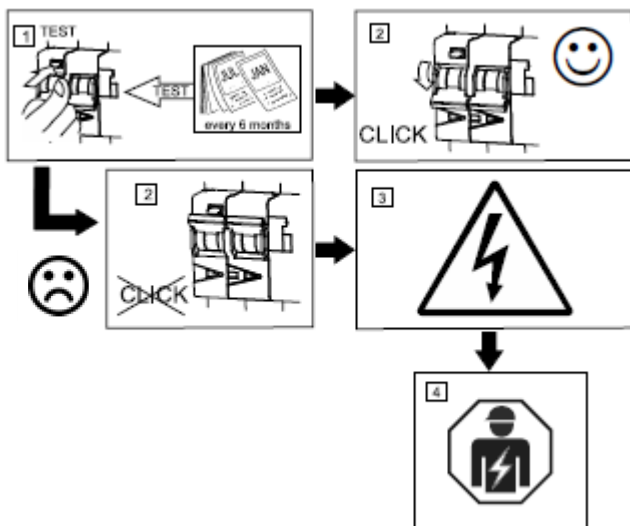

Installation by electricians only
Montage nur durch Elektrofachkräfte
Montage uniquement par un électricien
Montáž pouze osobami s elektrotechnickou kvalifikací
Má kun installeres af en aut. el-installatør
Debe ser instalado por un profesional eléctrico
Csak szakképzett személy szerelheti
Montaggio esclusivamente ad opera di personale specializzato
Må monteres av autorisert installatør
Montage alleen door elektromonteurs
Deve ser instalado por um profissional
Montaj tylko przez uprawnionych instalatorów
Får endast utföras av behörig elektriker
Asennus vain sähköasentajan toimesta
Sadece uzman kişiler monte edebilir
Instalare numai de către electricieni
Монтаж может производить только элекрик
Εγκατάσταση μόνο από ηλεκτρολόγους
仅允许合格电气技师进行安装
التركيب فقط من قبل عمال كهرباء مختصين

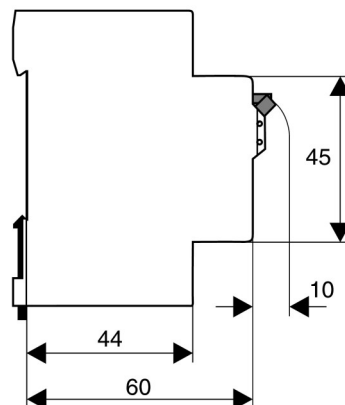
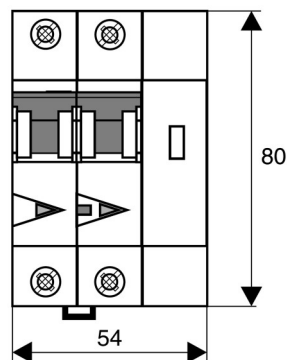


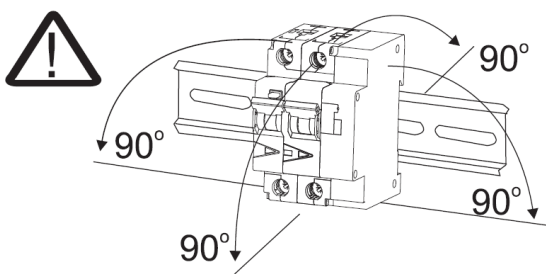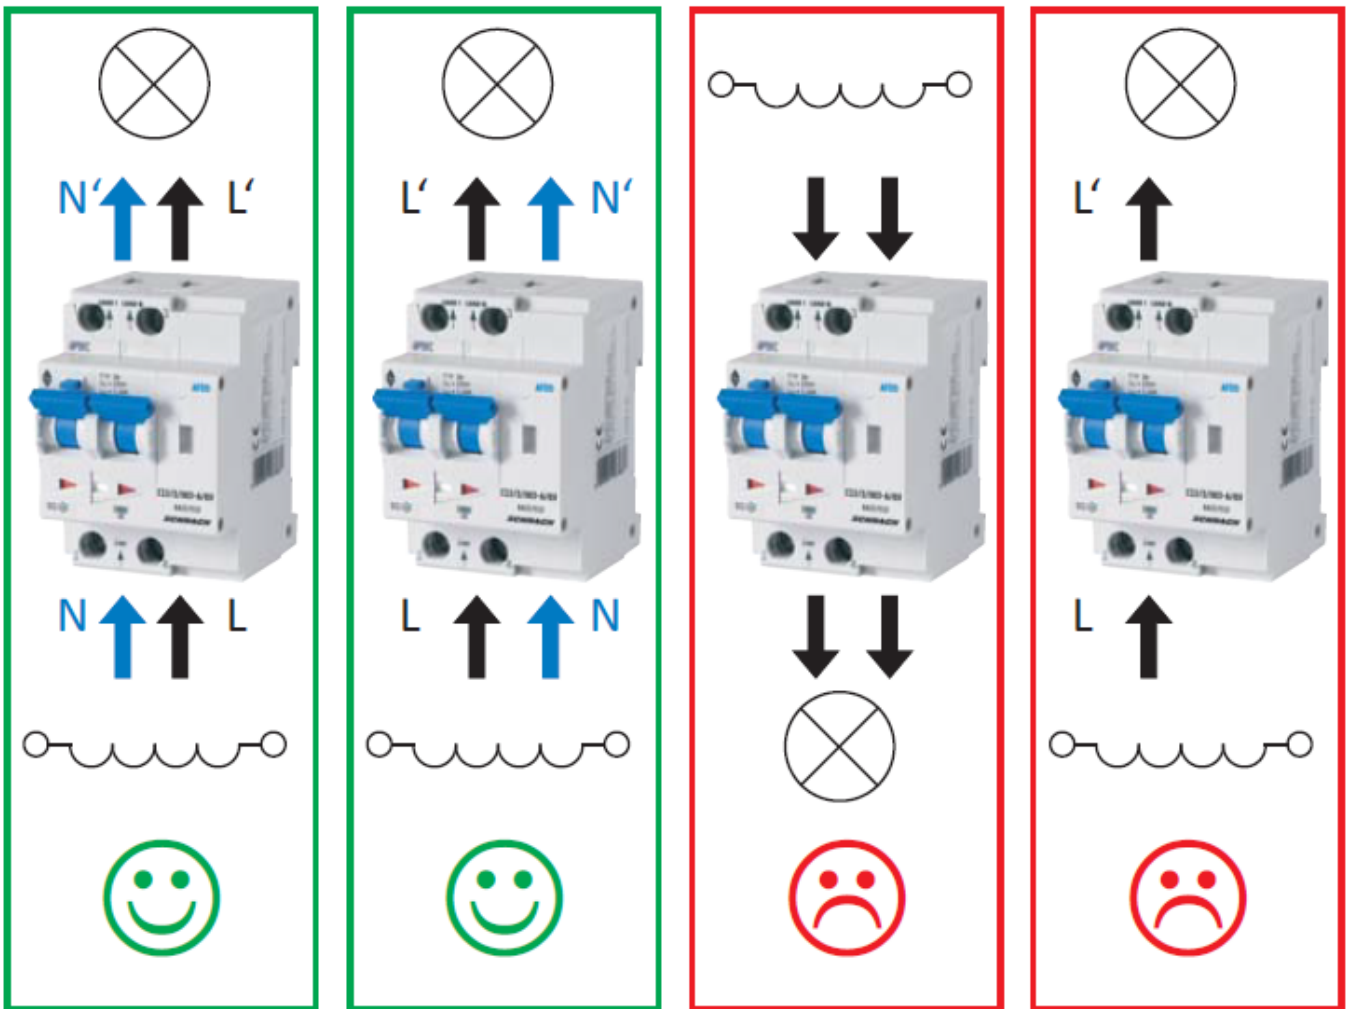

2 - 2,4Nm

  1 - 25mm² Cu only

   2,5 - 25mm² Cu only
Twist!

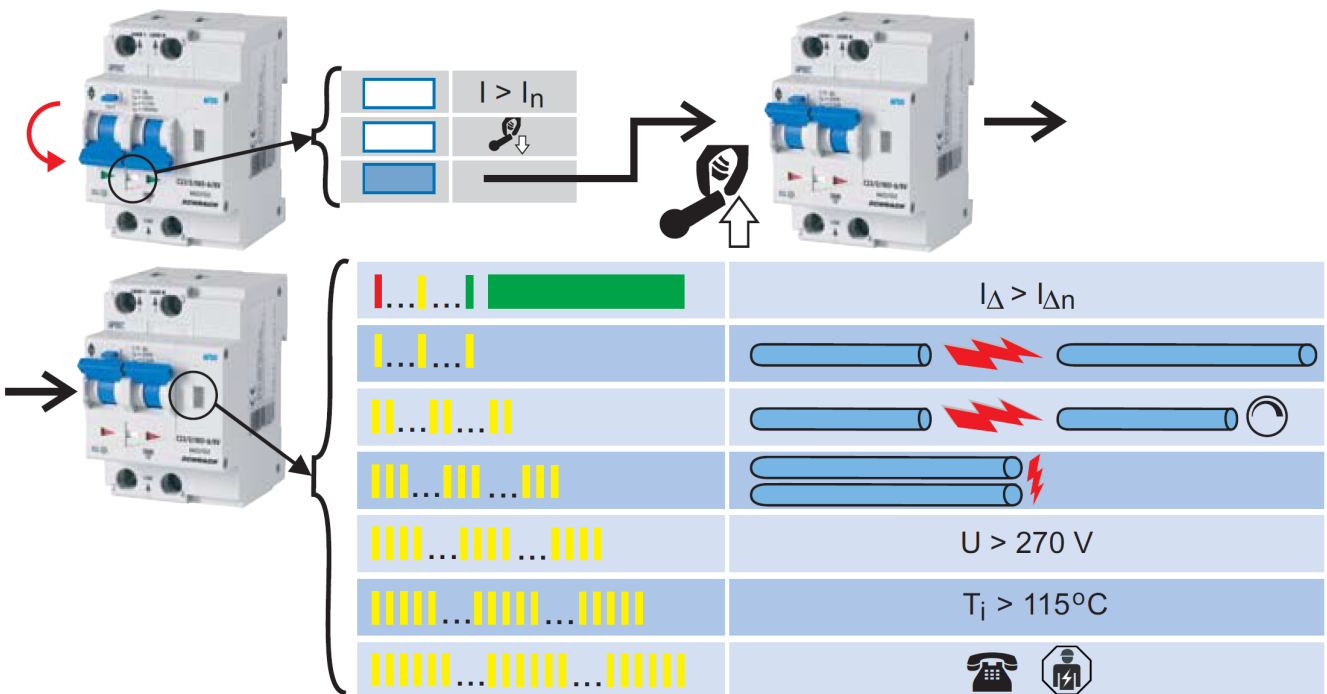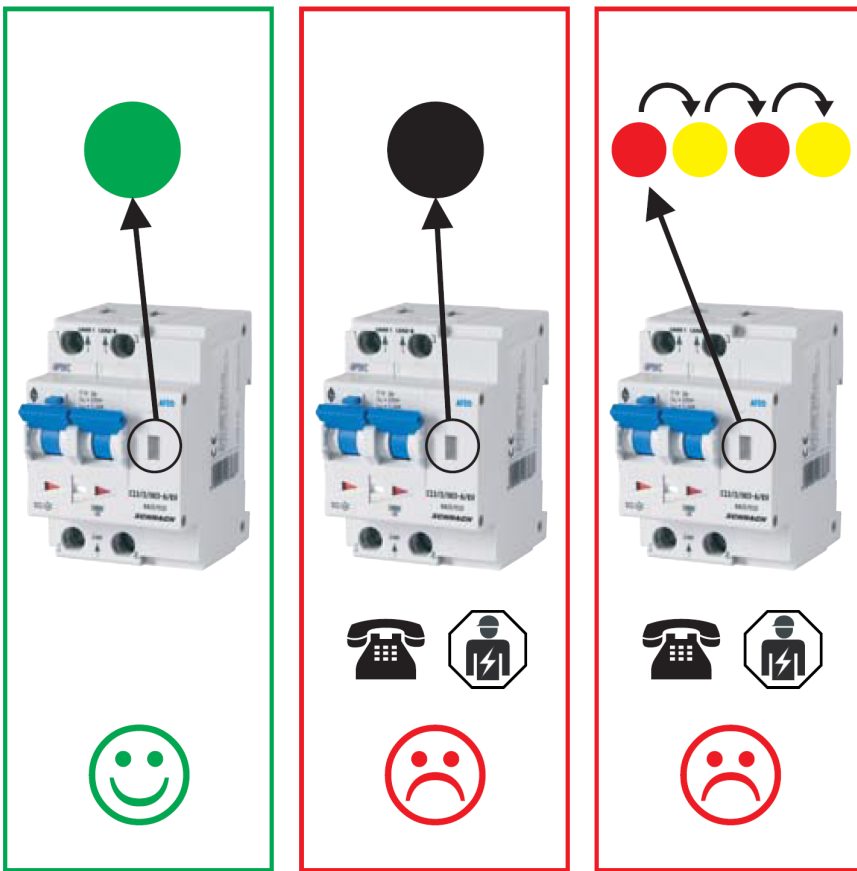

| LED – Display | |
|-------------------------|--|
| Green: | Function as well. Residual current $I_{\Delta} > I_{\Delta n}$ tripping current. |
| Yellow flashing 1x: | Serial arc at the circuit. |
| Yellow flashing 2x: | Serial arc at the circuit with dimmed loads |
| Yellow flashing 3x: | Parallel arc at the circuit. |
| Yellow flashing 4x: | Rated voltage U higher 270 V. |
| Yellow flashing 5x: | Temperature inside of device T_i higher than 115°C |
| Yellow flashing 6x: | Error message of the device, contact an electrician. |
| Rot / Yellow alternate: | Error message of the device, contact an electrician. |
| No LED: | No supply voltage or device is defect. |

