

### Series C



### Series CB



### Series CBR



#### Applications

The clamps are designed for quick and reliable mounting and connection of various round ventilation system components. The clamps facilitate the installation and removal of fans for maintenance and cleaning.

#### Design

C series clamps are made of stainless steel (C series) or galvanized steel (C.. Z.) strips. The clamps are tightened with screws.

CB series clamps are the quick detachable clamps of stainless steel with the swing screw of stainless steel. The clamps are tightened with screw.

CBR 3000 series clamps are the band clamps in a plastic covering (roll 30 m x 9 mm x 0.8 mm). Locking devices set SU 50 (50 pcs) is supplied separately. Using a band of the worm drive clip of the required length and locking device you have the required diameter clamp. The clamps are tightened with screws.

Tin snips are everything you need to have the



required length clamp as the plastic casing has a special design and marking.

Application:

1. Bend the clamp edge.
2. Fix the bent edge of the band into the band holder.
3. Turn the band holder till the mark of the required diameter on the casing.
4. Cut the band away as applicable for the casing.
5. Fix the locking device on the clamp.

#### Overall dimensions:

Type	Dimensions [mm]	
	∅D	H
C 100	90-110	9
C 125	110-130	9
C 130	120-140	9
C 150	140-160	9
C 160	150-170	9
C 200	190-210	9
C 250	240-260	9
C 315	300-330	9

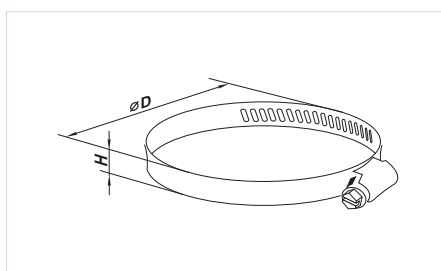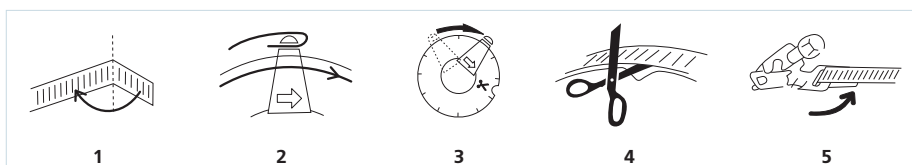

#### Overall dimensions:

Type	Dimensions [mm]	
	∅D	H
CB 60-110	60-110	9
CB 60-135	60-135	9
CB 60-165	60-165	9
CB 60-180	60-180	9



#### Designation key:

Series	Diameter [mm]
C	100; 125; 130; 150; 160; 200; 250; 315
CB	60-110; 60-135; 60-165; 60-180
CBR	

CZK, CZ,  
CLAMPS  
C, CB, CBR