



MASTER TL-D Food

MASTER TL-D Food 36W/79 SLV/25

The TL-D Food lamp makes the appearance of meat and bakery products more fresh and tasty. It can be applied for food illumination in butcher shops, bakeries, supermarkets etc.

Product data

General Information				
Cap-Base	G13 [Medium Bi-Pin Fluorescent] 15000 h			
Life to 50% Failures (Nom)				
Life to 50% Failures Preheat (Nom)	20000 h			
ight Technical				
Color Code	79			
uminous Flux (Nom)	1750 lm			
Color Designation	Food			
umen Maintenance 2000 h (Nom)	90 %			
umen Maintenance 5000 h (Nom)	85 %			
hromaticity Coordinate X (Nom)	365			
hromaticity Coordinate Y (Nom)	314			
orrelated Color Temperature (Nom)	3800 K			
uminous Efficacy (Rated) (Nom)	49 lm/W			
color Rendering Index (Nom)	74			
Operating and Electrical				
ower (Rated) (Nom)	36.0 W			
amp Current (Nom)	0.440 A			
/oltage (Nom)	103 V			

Controls and Dimming	
Dimmable	Yes
Approval and Application	
Energy Efficiency Label (EEL)	В
Mercury (Hg) Content (Nom)	5.0 mg
Energy Consumption kWh/1000 h	43 kWh
Product Data	
Full product code	871150070622540
Order product name	MASTER TL-D Food 36W/79 SLV/25
EAN/UPC - Product	8711500706225
Order code	928048502043
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	25
Material Nr. (12NC)	928048502043
Net Weight (Piece)	135.000 g
ILCOS Code	FD-36/38/2A-E-G13


Datasheet, 2017, October 19 data subject to change

MASTER TL-D Food

Warnings and Safety

• A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


Dimensional drawing




Product	D (max)	A (max)	B (max)	B (min)	C (max)
MASTER TL-D Food	28 mm	1199.4 mm	1206.5 mm	1204.1 mm	1213.6 mm
36W/79 SLV/25					

TL-D Food 36W/79

Photometric data

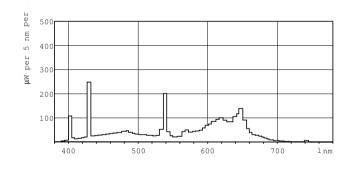


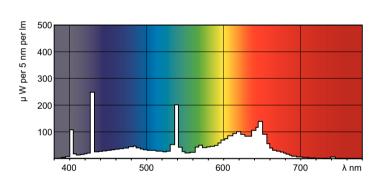


Lightcolor /79

Lightcolor /79

Lifetime

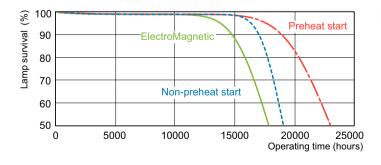




MASTER TL-D Food/Food Secura Life Expectancy 12 h cycle

MASTER TL-D Food/Food Secura Life Expectancy 3 h cycle

MASTER TL-D Food

Lifetime

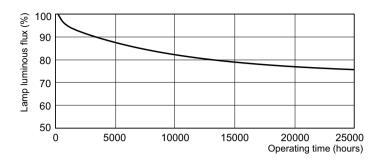

MASTER TL-D Food/Food Secura Lumen Maintenance 3 h + 12 h cycle

