



MASTER PL-C 2 Pin

MASTER PL-C 26W/827/2P 1CT/5X10BOX

MASTER PL-C is an efficient medium-wattage compact fluorescent lamp, typically used in general downlights for retail, hospitality and office applications. The original Philips-invented bridge technology guarantees optimum performance in the application, enabling more light and higher efficacy than the bended technology. The 2-pin version is designed for operation on electromagnetic gear and is provided with a plug-in/pull-out lamp base.

Product data

General Information	
Cap-Base	G24D-3 [G24d-3]
Life To 10% Failures (Nom)	6500 h
Life To 50% Failures (Nom)	10000 h
LSF 2000 h Rated	99 %
LSF 4000 h Rated	98 %
LSF 6000 h Rated	92 %
LSF 8000 h Rated	78 %
Light Technical	
Color Code	827 [CCT of 2700K]
Luminous Flux (Nom)	1800 lm
Luminous Flux (Rated) (Nom)	1800 lm
Color Designation	Incandescent White
Chromaticity Coordinate X (Nom)	463
Chromaticity Coordinate Y (Nom)	420
Correlated Color Temperature (Nom)	2700 K
Luminous Efficacy (rated) (Nom)	68 lm/W
Color Rendering Index (Nom)	82
LLMF 2000 h Rated	92 %
LLMF 4000 h Rated	87 %

LLMF 6000 h Rated	83 %																										
LLMF 8000 h Rated	81 %	Operating and Electrical		Power (Rated) (Nom)	26.5 W	Lamp Current (Nom)	0.335 A	Temperature		Design Temperature (Nom)	28 °C	Controls and Dimming		Dimmable	No	Mechanical and Housing		Cap-Base Information	2 Pins	Approval and Application		Energy Efficiency Label (EEL)	B	Mercury (Hg) Content (Nom)	1.4 mg	Energy Consumption kWh/1000 h	32 kWh
Operating and Electrical																											
Power (Rated) (Nom)	26.5 W																										
Lamp Current (Nom)	0.335 A																										
Temperature																											
Design Temperature (Nom)	28 °C																										
Controls and Dimming																											
Dimmable	No																										
Mechanical and Housing																											
Cap-Base Information	2 Pins																										
Approval and Application																											
Energy Efficiency Label (EEL)	B																										
Mercury (Hg) Content (Nom)	1.4 mg																										
Energy Consumption kWh/1000 h	32 kWh																										

MASTER PL-C 2 Pin

Product Data


Full product code	871150062095870
Order product name	MASTER PL-C 26W/827/2P 1CT/5X10BOX
EAN/UPC - Product	8711500620958
Order code	927906182740
Numerator - Quantity Per Pack	1

Numerator - Packs per outer box	50
Material Nr. (12NC)	927906182740
Net Weight (Piece)	64.300 g
ILCOS Code	FSQ-26/27/1B-I-G24d=3

Warnings and Safety

- Use only with electromagnetic control gear
- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position
- Dimming is not possible
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


Dimensional drawing




PL-C 26W/827/2P

Product	D (max)	D1 (max)	A (max)	B (max)	C (max)
MASTER PL-C 26W/827/2P 1CT/5X10BOX	27.1 mm	27.1 mm	130.5 mm	149.0 mm	171.4 mm

Photometric data

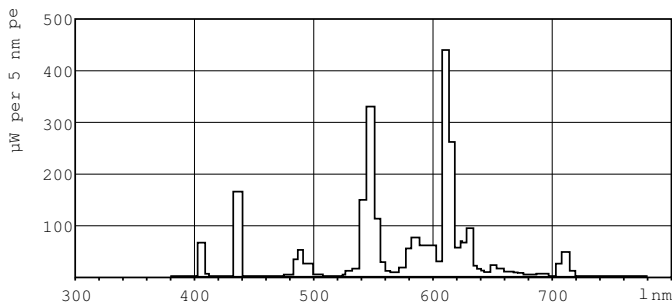



Lightcolor /827

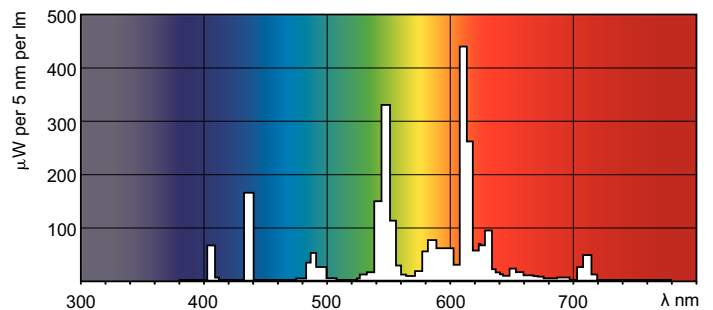


Lightcolor /827

MASTER PL-C 2 Pin

Lifetime

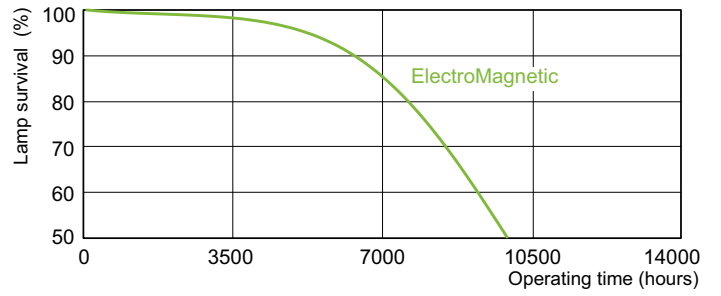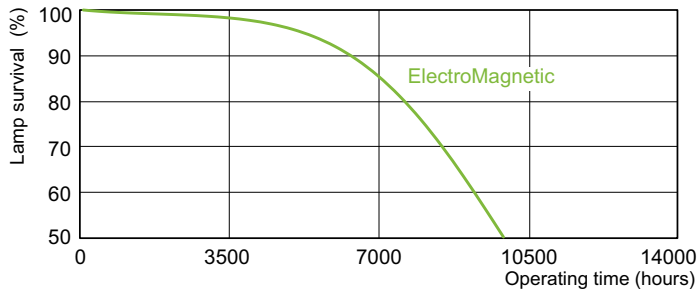

Life Expectancy 3 h cycle

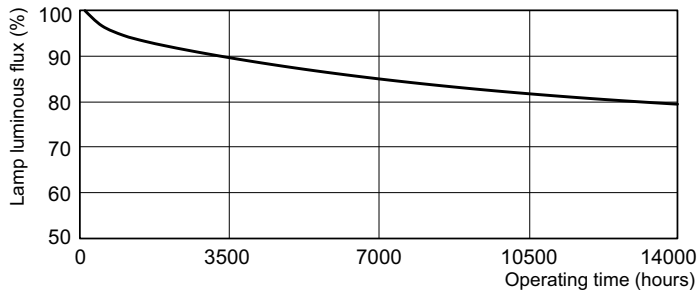

Life Expectancy 12 h cycle

Lumen Maintenance 3h + 12 h cycle

