



MASTER PL-C 4 Pin

MASTER PL-C 18W/830/4P 1CT/5X10BOX

MASTER PL-C is an efficient medium-wattage compact fluorescent lamp, typically used in general downlights for retail, hospitality and office applications. The original Philips-invented bridge technology guarantees optimum performance in the application, enabling more light and higher efficacy than the bended technology. The 4-pin version is designed for operation on electronic HF control gear with integrated pre-heat and is provided with a plug-in/pull-out lamp base.

Product data

General Information		LLMF 6000 h Rated		LLMF 8000 h Rated		LLMF 12000 h Rated	
Cap-Base	G24Q-2 [G24q-2]		83 %		81 %		
Life To 50% Failures Preheat (Nom)	13000 h						
LSF Preheat 2000 h Rated	99 %						
LSF Preheat 4000 h Rated	98 %						
LSF Preheat 6000 h Rated	97 %						
LSF Preheat 8000 h Rated	90 %						
Light Technical		Operating and Electrical		Temperature		Controls and Dimming	
Color Code	830 [CCT of 3000K]	Power (Rated) (Nom)	16.5 W	Design Temperature (Nom)	28 °C	Dimmable	Yes
Luminous Flux (Nom)	1200 lm	Lamp Current (Nom)	0.230 A				
Luminous Flux (Rated) (Nom)	1200 lm						
Color Designation	Warm White (WW)	Mechanical and Housing		Approval and Application			
Chromaticity Coordinate X (Nom)	440	Cap-Base Information	4 Pins	Energy Efficiency Label (EEL)	A		
Chromaticity Coordinate Y (Nom)	403			Mercury (Hg) Content (Nom)	1.4 mg		
Correlated Color Temperature (Nom)	3000 K						
Luminous Efficacy (rated) (Nom)	67 lm/W						
Color Rendering Index (Nom)	82						
LLMF 2000 h Rated	92 %						
LLMF 4000 h Rated	87 %						

MASTER PL-C 4 Pin


Energy Consumption kWh/1000 h	20 kWh
Product Data	
Full product code	871150062333170
Order product name	MASTER PL-C 18W/830/4P 1CT/5X10BOX
EAN/UPC - Product	8711500623331
Order code	927907283040

Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	50
Material Nr. (12NC)	927907283040
Net Weight (Piece)	55.300 g
ILCOS Code	FSQ-18/30/1B-E-G24q=2

Warnings and Safety

- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position as well as applied HF control gear
- Shorter lamp life when often switching and not well pre-heated electrodes
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


Dimensional drawing




PL-C 18W/830/4P

Product	D (max)	D1 (max)	A (max)	B (max)	C (max)
MASTER PL-C 18W/830/4P 1CT/5X10BOX	27.1 mm	27.1 mm	109.5 mm	128.0 mm	142.9 mm

Photometric data

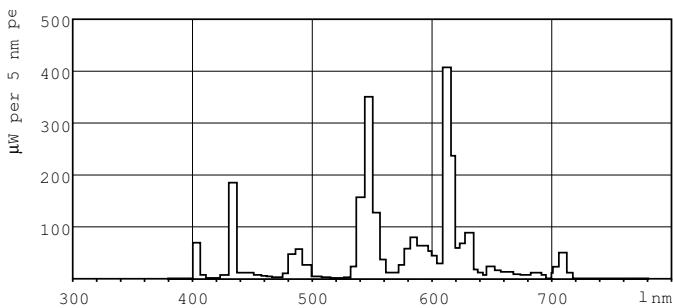

Lightcolor /830

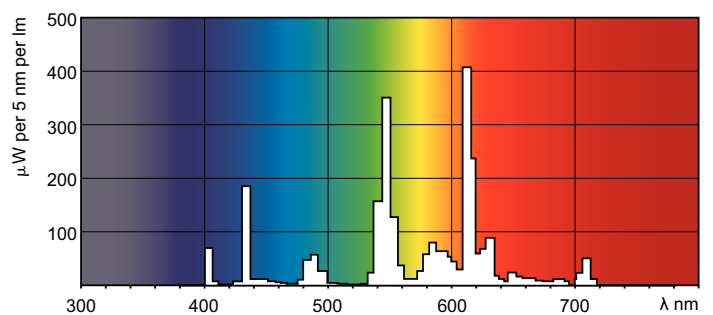

Lightcolor /830


MASTER PL-C 4 Pin

Lifetime



Life Expectancy 3 h cycle

Life Expectancy 12 h cycle

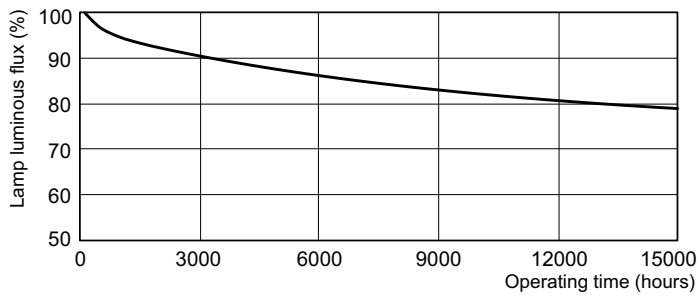

Lumen Maintenance 3 h and 12 h cycle

