


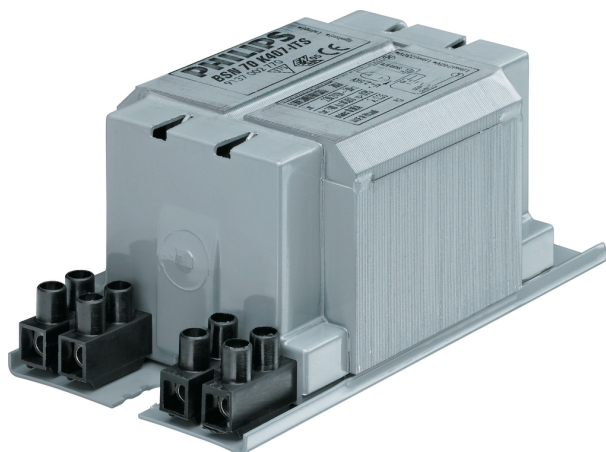

HID-Basic BSN/BMH MK4 semi-parallel for SON/CDO/CDM/MH/HPI

BSN 50 K302-I 230V 50Hz BC1-118

Impregnated electromagnetic copper ballasts for use with an external semi-parallel ignitor for CDM, CDO, MH, HPI (Plus) and SON lamps

Catalog de date

• caracteristici generale

Rated Number of Lamps	1 piece
Rated Ballast-Lamp Power	50
Application code	K302-I
Line Voltage	230 V
Line Frequency	50 Hz
Design	BC1-118

• caracteristici de operare

Input current with PF-correct.	0.85 A
Mains voltage safety (AC)	-10%/+10%
Mains voltage performance (AC)	-8%/+6%
PowerFactor 100% output power	0.35 -

• caracteristici cablaj

Connector type	Screw
Wcs Ballast contacts	2.5 mm2

• caracteristici de temperatura

Active temperature protection	Yes
T-winding maximum (tw)	140 (max) C
Delta-T normal conditions	70 C

• dimensiuni produs

Length A1	118.0 mm
Fixing Hole Distance	94.0 mm
Length A2	
Width B1	61.0 mm
Height C1	52.0 mm
Fixing Hole Diameter D1	6.2 mm

• Caract. aprobare & aplicare

CE marking	Yes
ENEC certificate	Yes


• Informatii produs

Cod comanda	940435 00
Cod produs	872790094043500
Denumire produs	BSN 50 K302-I 230V 50Hz BC1-118
Produs - Denumire comanda	BSN 50 K302-I 230V 50Hz BC1-118
Bucati per pachet	1
Configuratie Impachetare	6
Pachete per box	6
Cod de bare per produs (EAN1)	8727900940435
Cod de bare per box (EAN3)	8727900940442
Cod logistic - 12NC	913700282126
Masa neta per bucata	0.955 kg

PHILIPS
sense and simplicity

HID-Basic BSN/BMH MK4 semi-parallel for SON/CDO/CDM/MH/HPI

Cote

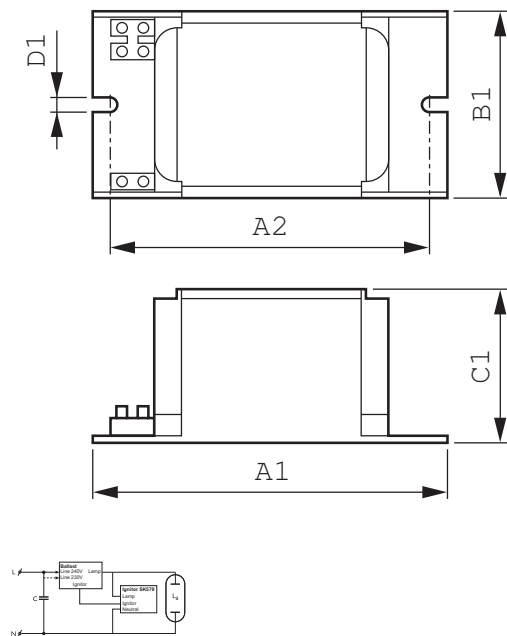

Product	A1 (Norm)	A2 (Norm)	B1 (Norm)	C1 (Norm)	D1 (Norm)
BSN 50 K302-I 230V 50Hz	118.0	94.0	61.0	52.0	6.2
BC1-118					

