



# MASTER SON-T APIA Plus Xtra

MASTER SON-T APIA Plus Xtra 250W E40 1SL

High Pressure Sodium lamp with clear tubular outer bulb shape, high output and longest reliable lifetime

## Product data

### • General Characteristics

System Description	External Ignitor
Cap-Base	E40
Bulb	T46 [T 46mm]
Bulb Finish	Clear
Operating Position	any [Any or Universal (U)]
Life to 5% failures	28000 hr
Life to 10% failures	32000 hr
Life to 20% failures	36500 hr
Life to 50% failures	45000 hr
LSF EM 2000h Rated, 12h cycle	100 %
LSF EM 4000h Rated, 12h cycle	99 %
LSF EM 6000h Rated, 12h cycle	99 %
LSF EM 8000h Rated, 12h cycle	99 %
LSF EM 12000h Rated, 12h cycle	99 %
LSF EM 16000h Rated, 12h cycle	99 %
LSF EM 20000h Rated, 12h cycle	99 %

### • Light Technical Characteristics

Color Code	-
Color Rendering Index	25 (max) Ra8
Color Temperature Technical	1950 K
Luminous Flux EM 25°C, Rated	33300 Lm
Lum Efficacy Rated EM 25°C	130 Lm/W

Luminance Average EM	470 cd/cm <sup>2</sup>
LLMF EM 2000h Rated	99 %
LLMF EM 4000h Rated	98 %
LLMF EM 6000h Rated	97 %
LLMF EM 8000h Rated	96 %
LLMF EM 12000h Rated	96 %
LLMF EM 16000h Rated	95 %
LLMF EM 20000h Rated	94 %
Chromaticity Coordinate X	530 -
Chromaticity Coordinate Y	420 -

### • Electrical Characteristics

Lamp Wattage	250 W
Lamp Wattage EM 25°C, Nominal	250.0 W
Lamp Wattage EM 25°C, Rated	250.0 W
Lamp Voltage	100 V
Lamp Current EM	3 A
Ignition Time	10 (max) s
Run-up time 90%	5 (max) min
Dimmable	Yes
Re-ignition Time [sec]	120 (max) s
Ratio scotopic/photopic lumens	0.60 -

**PHILIPS**

## • Environmental Characteristics

Energy Efficiency Label (EEL)	A+
Mercury (Hg) Content	15 mg
Energy consumption kWh/1000h	275 kWh

## • Luminaire Design Requirements

Cap-Base Temperature	250 (max) C
Bulb Temperature	450 (max) C

## • Product Dimensions

Overall Length C	257 (max) mm
Diameter D	48 (max) mm
Light Center Length L	158 mm

Arc Length O 64 mm



## • Product Data

Order code	928150419230
Full product code	928150419230
Full product name	MASTER SON-T APIA Plus Xtra 250W E40 1SL
Order product name	MST SON-T APIA Plus Xtra 250W E40 1SL/12
Pieces per pack	1
Packing configuration	12
Packs per outerbox	12
Bar code on pack - EAN1	8727900927375
Bar code on outerbox - EAN3	8727900927382
Logistic code(s) - 12NC	928150419230
ILCOS code	ST-250-H/E-E40
Net weight per piece	0.158 kg

## Warnings and Safety

- Control gear must include end-of-life protection (IEC60662, IEC 62035)

## Dimensional drawing

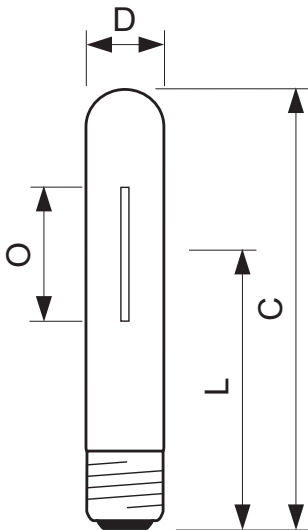


E40

## MASTER SON-T APIA Plus Xtra 250W E40 1SL

Product	C (Max)	D (Max)	L (Norm)	O (Norm)
SON-T APIA Plus Xtra 250W E40	257	48	158	64

Photometric data

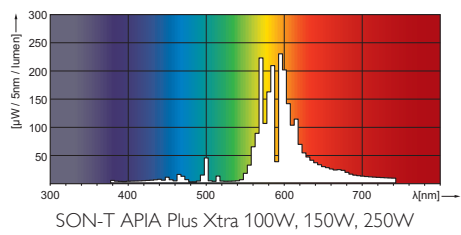

© 2013 Koninklijke Philips N.V. (Royal Philips)  
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

[www.philips.com/lighting](http://www.philips.com/lighting)

2013, October 9  
data subject to change