


LED DOWNLIGHT


Product&Family Code:

016 007 0005
VICTORIA-5


Technical Drawing

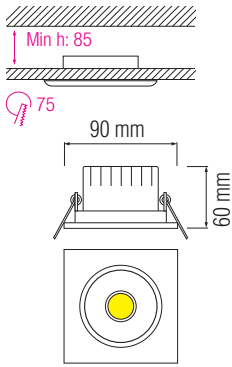

Photometric Diagram

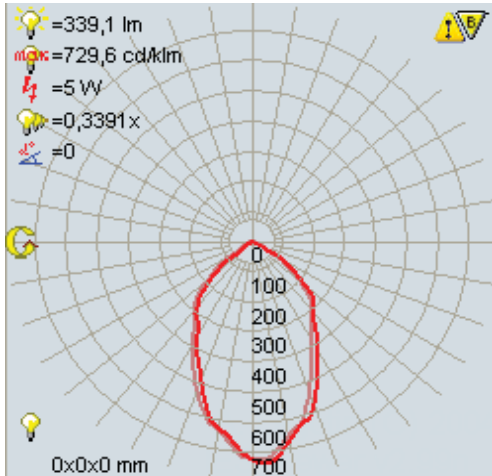

Technical Data	
Voltage (V)	220-240V
Product Wattage (W)	5
Equivalence with incandescent lamp	40
Colour Render Index (Ra)	>Ra80
Colour Temperature (K)	2700K / 4200K / 6500K
Materials	Aluminium Die Casting Body
Protection Class	II
Dimmable	No
EEI	A to A++
Warm-up time up to 60 % of the full light output	Instant Full Light
Luminous Flux (lm)	217 - 354
Luminous Efficacy (lm/W)	44 - 70
Rated Life (hrs) Ⓢ	40.000
IP Rating	20
Power Factor	>0.5
Beam Angle	87°
Starting Time	<0.2s
Number of ON-OFF cycling	x25.000

Applications

Airport, Bathroom, Bedroom, Car Park, Cinema, Gallery, Hospital, Hotel, Kitchen, Museum etc.



Features

- High Lumen and CRI, Good quality & Constant Current driver.
- High heat dissipation, low carbon and environmental protection.
- Innovative design of assembly structure.
- Extremely Long Life.

