

DATA SHEET:

19" PDU, 8 x Schuko with On/Off-Switch, Profile ALU 1U, 2m-connector cable, RAL7035



SCHRACK-INFO

8 x Schuko sockets 230VAC, 16A

- DIN 49 440, examined: VDE0620-1
- 2-pole with earthing contact
- 16A/3680W, 250VAC, IP20
- Color RAL7035, 35° turned

Connection:

- Endcaps riveted, inside wiring without euroterminal
- 2.0m H05VV-F 3G 1.5mm² black with german type plug

Profile:

- 1U, ALU, anodized

Plastic material:


- RAL7035, PA6, fibre glass 30%, Glow wire test up to 850° C ; V1

Switch:

- 2-poles, illuminated, green
- Countersunk

Mounting brackets:

- Steel sheet
- For fixing in 4 positions each 90°

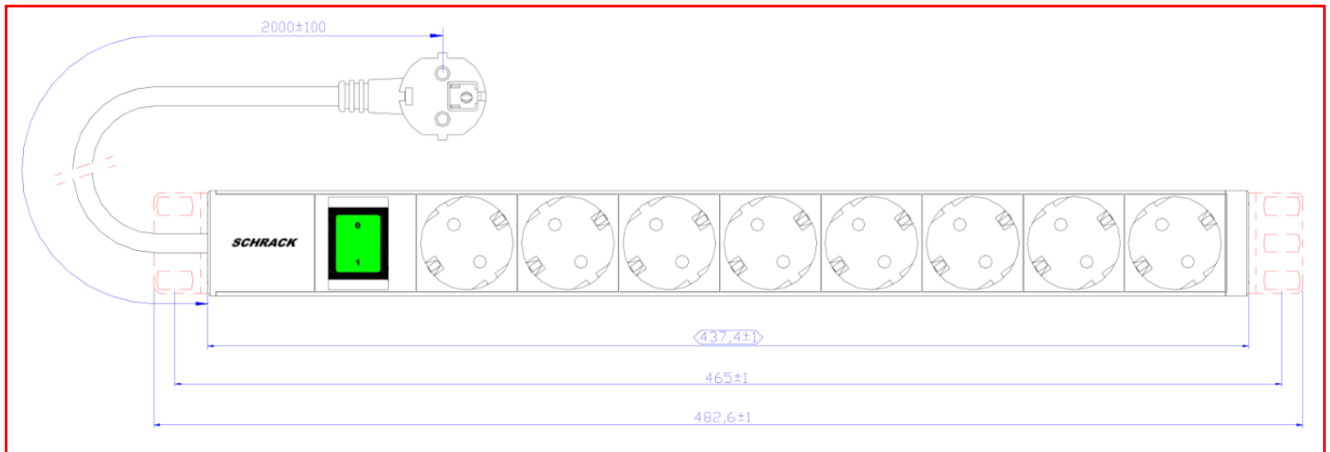

■ DIMENSIONS

- 437.4 x 48 x 45mm

■ EXTENT OF DELIVERY

- 1x PDU
- 2x mounting brackets

■ PACKAGING INFORMATION

- Single piece in polypack
- Weight: 0.86kg

DESCRIPTION	ORDER NO.
19" PDU, 8 x Schuko with On/Off-Switch, Profile ALU 1U, 2m-connector cable, RAL7035	IU070124--