


## BSD 4-07N CATV antenna wall outlet 5...1006 MHz

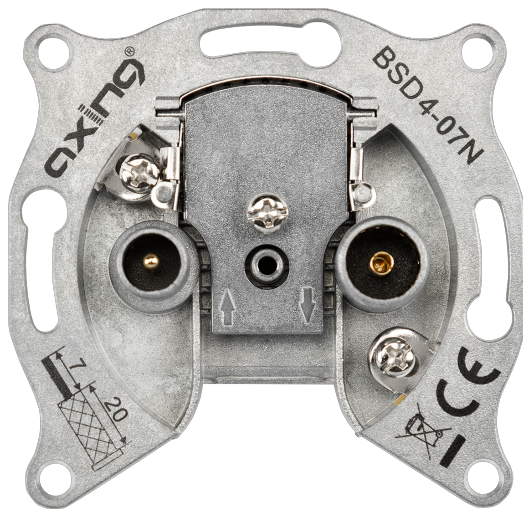

- ✓ Loop-through type with 7 dB tap loss
- ✓ Suitable for return path 5...65 MHz
- ✓ Surface treated

### Order information

Type	BSD 4-07N
Order no.	BSD00407N
GTIN	7611682007312
PE	1
VE	1



### Technical data

Tap method	Double directional coupler
Frequency range input	5...1006 MHz
Frequency range trunk output	5...1006 MHz
Frequency range TV connector	5...1006 MHz
Tap loss TV connector	7 dB $\pm$ 2 dB
Frequency range radio connector	5...1006 MHz
Tap loss radio connector	7 dB $\pm$ 2 dB
Isolation internal	$\geq$ 15 dB
Through loss	<5,5 dB
Connector TV   R	IEC-male   IEC-female
Suitable cables (Inner conductor   outer diameter)	0,63...1,13 mm   4,7...7,35 mm
Dimensions (W x H x D) appr.	70 x 66 x 32 mm

### Suitable products

[TZU 2-00 Cover plate | TV/R | single piece](#)

[TZU 1-00 Surface frame](#)

[TZU 2-10 Cover plate | TV/R | two-parts](#)

[TZU 1-10 Surface frame](#)

[TZU 3-00 Terminating resistor, 75 Ohm](#)