


Overhead Hanger-Distance Profile

epoxied

HDS 50.50 C1KG

EAN Code: 4013339967056
Smallest packaging unit: 10 pcs.

the photorealistic images are to be considered as reference images

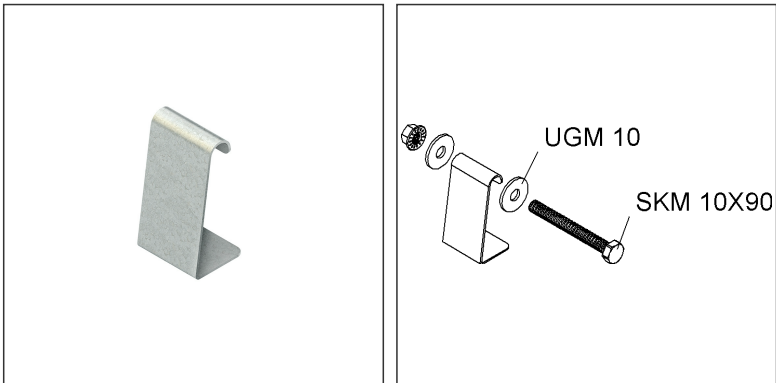

Article Description

Overhead hanger-distance profile for profile U 5050, epoxy coating 60-80 µm, RAL 7032, stone grey

Incl. accessories

1 SKM 10X90 E4, 2 UGM 10 E5

Additional Price Information

Article group	N15
quantity unit	pcs.

Weight

Weight per quantity unit	75 g / pcs.
Weight in kg per 100	7,5 kg / 100pcs.

Technical Datasheet

Supporting structure

HDS 50.50 C1KG

the photorealistic images are to be considered as reference images

Physical Article Dimensions

Height	80.00 mm
Width	36.00 mm
Depth/length	43.00 mm

Packing Dimension

1 piece = 1 piece		✓ VP1-smallest packaging unit (PU)			
Lenght	43.00 mm	Width	36.00 mm	Height	80.00 mm
Gross weight	0,08 kg	Volume	0,000 m³		
Min. quantity	1.00 pcs.	Max. Quantity	1.00 pcs.		

10 pieces = 1 carton		✓ VP2-preferred PU			
Lenght	205 mm	Width	120.00 mm	Height	80.00 mm
Gross weight	0,89 kg	Volume	0,002 m³		
Min. Quantity	10.00 pcs.	Max. Quantity	10.00 pcs.		

Tender Text

Overhead hanger distance profile, epoxy-coated, for mounting the bracket on overhead hanger HU 5050/...C1KG or profile U 5050/...C1KG on one level. In order to prevent deformation of the overhead hanger profile when mounting brackets, the overhead hanger distance profile with hexagonal bolt SKM 10x90 E4 and body washer UGM 10 must be taken into account for structural reasons! If the brackets are attached to one side of the overhead hanger profile, the closed side of the bracket should preferably be fitted flush with the profile web of the overhead hanger.

Used for : profile U 5050/...C1KG

overhead hanger HU 5050/... C1KG

Colour : pebble grey

RAL : 7032 (similar)

Surface coating : Epoxy-polyester resin coating 60 - 80 µm, halogen-free

Material : Steel, hot-dip galvanised acc. to DIN EN ISO 1461

NIEDAX Model No. : HDS 50.50 C1KG

EP Material_____ EP Wage_____

Unit price/piece

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73089059