



Screw Anchor

with countersunk head and Torx drive T20

NSA 5X40/SK-T20 V

EAN Code: 4013339153886
Smallest packaging unit:200 pcs.

the photorealistic images are to be considered as reference images

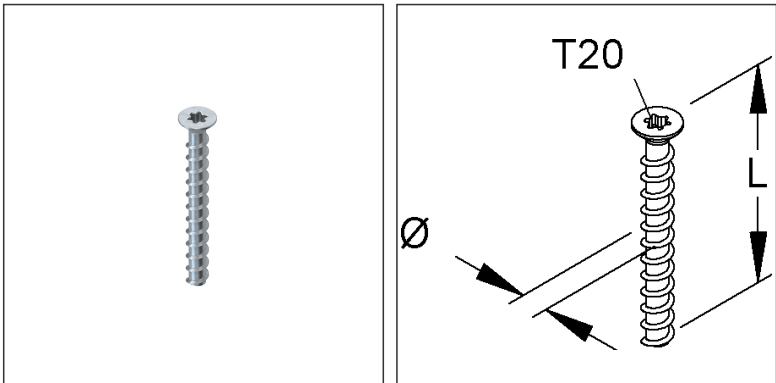

Article Description

Screw anchor, countersunk head, drill-Ø 4 mm, length 40 mm, steel, electro galvanised according to DIN EN ISO 2081/4042, blue pass

Additional Price Information

Article group	N19
quantity unit	pcs.

Weight

Weight per quantity unit	5 g / pcs.
Weight in kg per 100	0,41 kg/ 100pcs.

Technical Datasheet

Screws and nuts

NSA 5X40/SK-T20 V

the photorealistic images are to be considered as reference images

Physical Article Dimensions

Height	
Width	
Depth/length	

Packing Dimension

1 piece = 1 piece		✓ VP1-smallest packaging unit (PU)		✓ VP1-preferred PU	
Lenght	40.00 mm	Width	8.00 mm	Height	8.00 mm
Gross weight	0 kg	Volume	0,000 m³		
Min. quantity	1.00 pcs.	Max. Quantity	1.00 pcs.		

Tender Text

Screw anchor with countersunk head and Torx drive T20.
Application: The number and arrangement of the screw anchors are to be taken from the implementation planning or the structural analysis and must be complied with. Installation and assembly according to European Technical Assessment ETA-15/0784 or assembly instructions in cracked and non-cracked concrete C20/25 to C50/60. For dimensioning, the entire approval notice ETA-15/0784 must be observed.
A fire protection report is available for sand-lime brick KS, perforated sand-lime brick KSL and solid brick MZ. Use in dry interior rooms. Setting of the screw anchor with tangential impact screwdriver or by hand.
Used for :
Screw distance clamps SAS...
Pipe and cable spacer clamps 85... G
Technical data
Ø : 5 mm
Length L : 40 mm
Head-Ø : 7.8 mm
Nominal bore-Ø : 4 mm
Clamping range t fix : 5 mm
Recommended torque : 8 Nm
Torx drive : T20
Material : steel, galvanised according to DIN EN ISO 19598/4042, blue passivated
Approval no. : ETA-15/0784
NIEDAX Model no. : NSA 5X40/SK-T20 V
EP Material_____ EP Wage_____
Unit price/piece

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73181499