


Desk Trunking, Bottom Part

with TS 35 hat profile

PGU 120-78 C

EAN Code: 4013339704002
Smallest packaging unit: 4 x 2 m
quantity unit: m M

the photorealistic images are to be considered as reference images

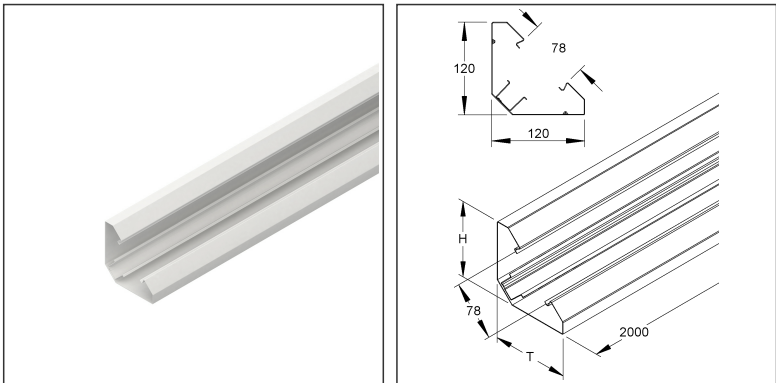

Article Description

Desk trunking, bottom part with TS 35 hat profile, 120x120x2000 mm, steel, pre-galv. according DIN EN 10346, powder-coated, incl. accessories

Incl. accessories

3 x GKF 78

Additional Price Information

Article group	N17
quantity unit	m

Weight

Weight per quantity unit	3,253 kg / m
Weight in kg per 100	325 kg / 100m

Technical Datasheet

Device trunking system

PGU 120-78 C

the photorealistic images are to be considered as reference images

Physical Article Dimensions

Height	80.00 mm
Width	168.00 mm
Depth/length	2000 mm

Packing Dimension

8 meters = 1		✓ VP1-smallest packaging unit (PU) ✓ VP1-preferred PU			
Lenght	2020 mm	Width	235 mm	Height	175.00 mm
Gross weight	27 kg	Volume	0,083 m³		
Min. quantity	8.00 m	Max. Quantity	8.00 m		

144 meters = 1 rack					
Lenght	2000 mm	Width	1162 mm	Height	1120 mm
Gross weight	587 kg	Volume	2,603 m³		
Min. Quantity	144.00 m	Max. Quantity	144.00 m		

Tender Text

Device duct desk trunking bottom section, visible surfaces electrostatically powder-coated in RAL colour acc. to manufacturer's catalogue, with riveted hat-shaped TS 35 support profile for accommodating built-in components which can be fastened on support profiles acc. to DIN EN 60715, device mounting in the cable run with snap-in device box for installation programmes with 80 mm cover frame and 60 mm fastening track or for accommodating barrier strips, etc., device installation without perforated covers, including 3 cable clips GKF... each 2 m delivery length, accessories for potential equalisation must be ordered separately.

Dimensions (approx. dimensions) H x D : 120 x 120 mm

Cover opening : 78 mm

Delivery length L : 2000 mm

Usable cross-section : 7956 mm²

Colour:_____ RAL:_____

Material : Steel, pre-galvanised acc. to DIN EN 10346

NIEDAX Model No. : PGU 120-78 C

EP Material_____ EP Wage_____

Unit price/meter

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73089059

Technical Datasheet

Device trunking system

PGU 120-78 C

the photorealistic images are to be considered as reference images

Related items

Cover

Model No.	Description
GDAG 78 C	Cover, smooth, 78x2000 mm, aluminium, powder-coated, incl. accessories
GDAR 78 C	Cover, fluted, 78x2000 mm, aluminium, powder-coated, incl. accessories
GDS 78 C	Cover, smooth, 78x2000 mm, steel,pre-galv.according DIN EN 10346,powder-coated, incl. accessories

Barrier strip

Model No.	Description
GTDS 50	Barrier strip, double, height 11 mm, depth 38 mm, steel, pre-galvanised according to DIN EN 10346
GTK 50	Barrier strip, single, height 20 mm, depth 43,5 mm, plastics, PVC-hard, RAL 7030, stone grey
GTS 50	Barrier strip, single, height 15 mm, depth 42 mm, steel, pre-galvanised according to DIN EN 10346

Connector

Model No.	Description
PSTA 120-78	Splice plate with flat plugs, for height 120 mm, depth 78 mm, brass
PSTE 120-78	Splice plate, for height 120 mm, depth 78 mm, brass