


Cover for Angle-adjustable Fitting

RBAVDS 100

EAN Code: 4013339924165

Smallest packaging unit: 1 pc.

the photorealistic images are to be considered as reference images

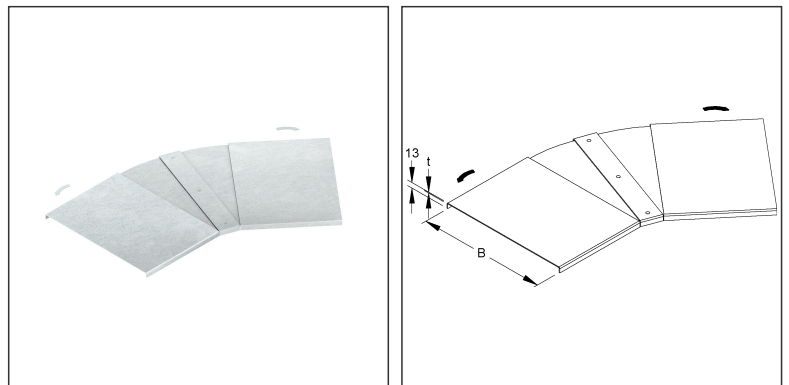

Article Description

Cover for angle-adjustable fitting 0-90° for cable tray, width 105 mm, steel, pre-galvanised according to DIN EN 10346

Additional Price Information

Article group	N13
quantity unit	pcs.

Weight

Weight per quantity unit	652 g / pcs.
Weight in kg per 100	65 kg / 100pcs.

Physical Article Dimensions

Height	13.00 mm
Width	109.00 mm
Depth/length	206 mm

Technical Datasheet

Cable Tray System

RBAVDS 100

the photorealistic images are to be considered as reference images

Packing Dimension

1 piece = 1 piece		✓ VP1-smallest packaging unit (PU)			
Lenght	206 mm	Width	109.00 mm	Height	13.00 mm
Gross weight	0,65 kg	Volume	0,000 m³		
Min. quantity	1.00 pcs.	Max. Quantity	1.00 pcs.		

Tender Text

Cover, heavy-duty version, without turning bolt locks, height-independent cover for the angle-adjustable fitting of the walkable cable trays, flexibly adjustable angle of 0-90°, overlapping cover at the joints. The cover is fixed exclusively by means of the cover retaining spring RDHFS 9. This has been specially designed for the horizontal cover position. When fixing, it must be ensured that a minimum distance of 50 mm to the beginning/end of the cover is maintained. To support the walkable cover, please observe the minimum number of Barrier strips (see Barrier strip RTSKQ... AL, RTSQF... and RW...-...)!
Used for: angle-adjustable fitting RBAVS ...
Requirement per cover : 4 x RDHFS 9 please order separately
Dimensions (approx. dimensions)
B (inside) : 105 mm
Material thickness t : 2 mm
Material : steel, pre-galvanised to DIN EN 10346
NIEDAX Model no. : RBAVDS 100
EP Material_____ EP Wage_____
Unit price/piece

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Federal State of Origin	RP
Customs tariff number	73089059