



Cover for Elbow 45°

with pre-assembled turning lock fasteners and full-surface, heavy aluminium chequer plate support

RBADVSRSL 600 S

EAN Code: 4013339020027
Smallest packaging unit: 1 pc.

the photorealistic images are to be considered as reference images

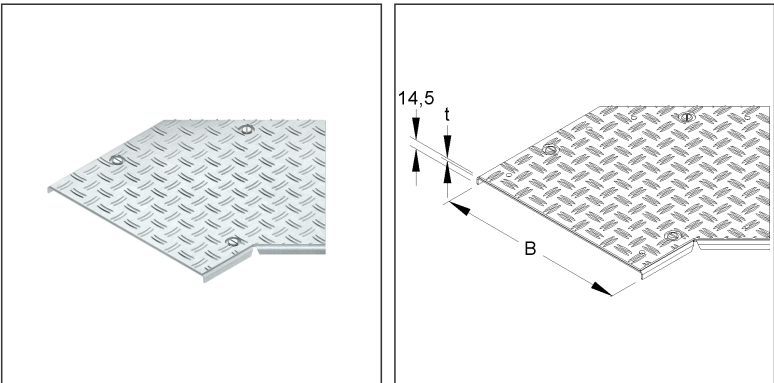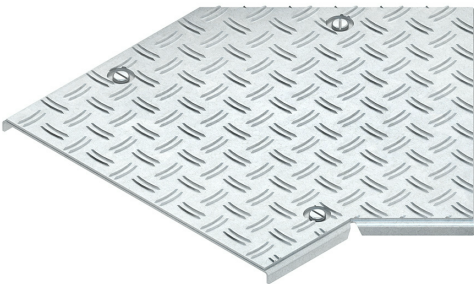

Article Description

Cover for elbow 45° for KR, width 605 mm, t=4.0 mm, with turning bolt, steel, pre-galvanised acc. DIN EN 10346

Additional Price Information

Article group	N13
quantity unit	pcs.

Weight

Weight per quantity unit	5,531 kg/ pcs.
Weight in kg per 100	553 kg / 100pcs.

Technical Datasheet

Cable Tray System

RBADVSRSL 600 S

the photorealistic images are to be considered as reference images

Physical Article Dimensions

Height	15.50 mm
Width	679 mm
Depth/length	599.60 mm

Packing Dimension

1 piece = 1 piece		✓ VP1-smallest packaging unit (PU)			
Lenght	600 mm	Width	679 mm	Height	16.00 mm
Gross weight	5,53 kg	Volume	0,006 m³		
Min. quantity	1.00 pcs.	Max. Quantity	1.00 pcs.		

Tender Text

Cover antislip R9 in accordance with DIN EN 16165, heavy-duty version, with fully riveted light aluminium chequer plate and captive pre-mounted turning bolt locks, height-independent cover for the 45° elbow of the walkable cable trays.
To support the walkable cover, please observe the minimum number of Barrier strips (see Barrier strip RTSKQ... AL, RTSQF... and RW...-...)!
Other anti-slip coverings available on request.
Used for: T-piece extension RBAS ...
Dimensions (approx. dimensions)
Width W (inside) : 605 mm
Material thickness t : 4 mm
The material thickness is composed of 2 mm sheet steel, 1.5 mm aluminium sheet support and 0.5 mm chequer height.
Material : Steel, pre-galvanised according to DIN EN 10346
Aluminium, blank
NIEDAX Model no. : RBADVSRSL 600 S
EP Material_____ EP Wage_____
Unit price/piece

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Federal State of Origin	RP
Customs tariff number	73089059