
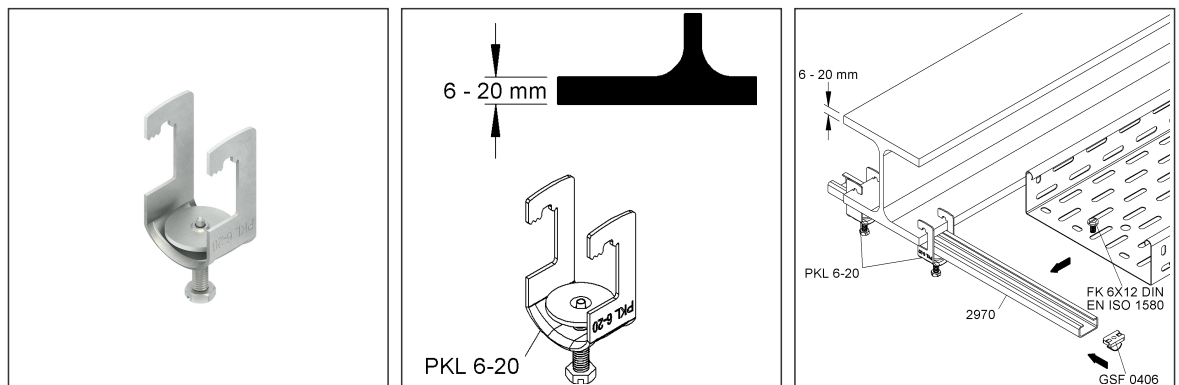


Profile Clamp

PKL 6-20 S

EAN Code: 4013339196548
Smallest packaging unit: 25 pcs.

the photorealistic images are to be considered as reference images

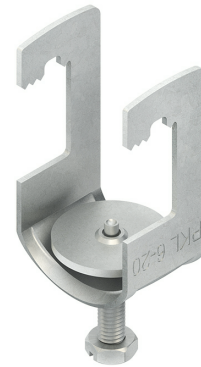

Article Description

Profile clamp, light, steel, pre-galvanised according to DIN EN 10346

Additional Price Information

Article group	N13
quantity unit	pcs.

Weight

Weight per quantity unit	47 g / pcs.
Weight in kg per 100	4,67 kg / 100pcs.

Physical Article Dimensions

Height	79.00 mm
Width	33.60 mm
Depth/length	24.00 mm

Technical Datasheet


Fastenings accessories

PKL 6-20 S

the photorealistic images are to be considered as reference images

Load Specifications

Load diagram: Profile clamp in connection with rail 2970

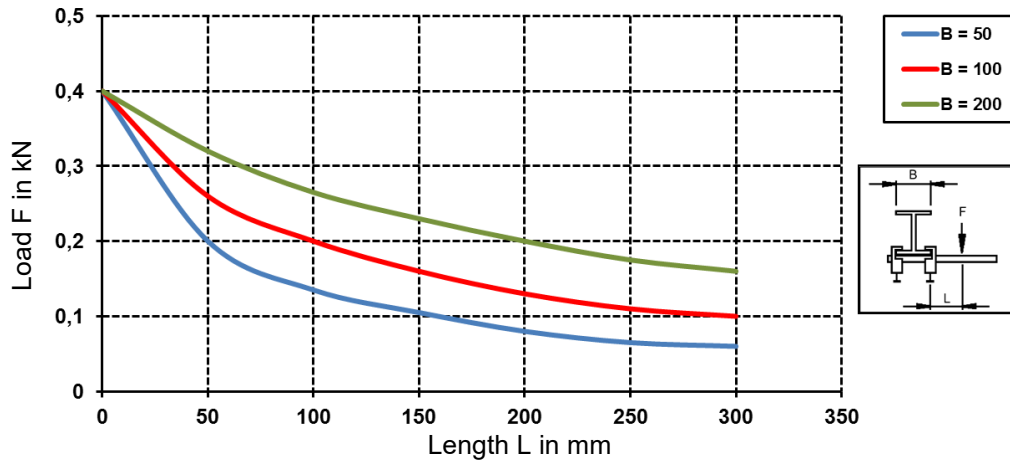

Packing Dimension

25 pieces = 1 carton		✓ VP1-smallest packaging unit (PU)		✓ VP1-preferred PU	
Lenght	210 mm	Width	150.00 mm	Height	100.00 mm
Gross weight	1,36 kg	Volume	0,003 m³		
Min. quantity	25.00 pcs.	Max. Quantity	25.00 pcs.		

1625 pieces = 1					
Lenght	750 mm	Width	750 mm	Height	730 mm
Gross weight	128 kg	Volume	0,411 m³		
Min. Quantity	1.625.00 pcs.	Max. Quantity	1.625.00 pcs.		

Tender Text

Profile clamp, for clamp fastening of profile 2970 to the flanges of steel beams, mounting the rail only with slot to the profile.
 Used for : C-profile 2970/...
 Dimensions (approx. dimensions)
 Clamp bracket without screw Height H x width W (inside) x length L : 60 x 30.6 x 24 mm
 for flange thickness : 6 - 20 mm
 Material : steel, pre-galvanised acc. to DIN EN 10346
 NIEDAX Model No. : PKL 6-20 S
 EP Material _____ EP Wage _____
 Unit price/piece

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Technical Datasheet
Fastenings accessories

PKL 6-20 S

the photorealistic images are to be considered as reference images

Origin & International Trade	
Country of origin	DE
Customs tariff number	73269098