



Profile Clamp

including M8 slotted stud screw

PKS M6/10-40 F

EAN Code: 4013339133871
Smallest packaging unit:25 pcs.

the photorealistic images are to be considered as reference images

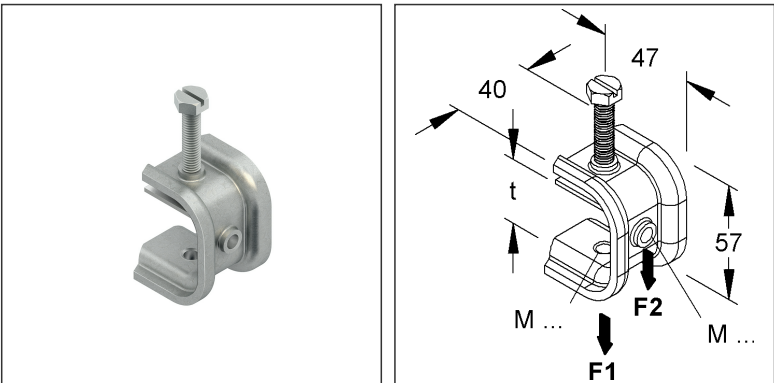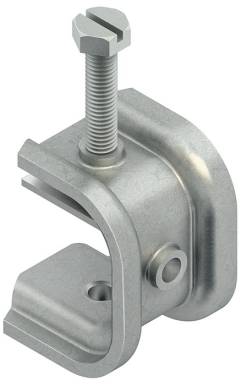

Article Description

Profile clamp, connection thread M6, including M8 slotted stud screw, steel, hot dip galvanised DIN EN ISO 1461

Additional Price Information

Article group	N13
quantity unit	pcs.

Weight

Weight per quantity unit	194 g / pcs.
Weight in kg per 100	19 kg / 100pcs.

Technical Datasheet

Supporting structure

PKS M6/10-40 F

the photorealistic images are to be considered as reference images

Physical Article Dimensions

Height	95.50 mm
Width	40.00 mm
Depth/length	47.00 mm

Packing Dimension

1 piece = 1 piece

Lenght	47.00 mm	Width	40.00 mm	Height	96.00 mm
Gross weight	0,19 kg	Volume	0,000 m³		
Min. quantity	1.00 pcs.	Max. Quantity	1.00 pcs.		

25 pieces = 1 carton

✓ VP2-smallest Packaging Unit (PU) ✓ VP2-preferred PU

Lenght	140.00 mm	Width	80.00 mm	Height	60.00 mm
Gross weight	4,83 kg	Volume	0,001 m³		
Min. Quantity	25.00 pcs.	Max. Quantity	25.00 pcs.		

5100 pieces = 1 pallet

Lenght	1200 mm	Width	800 mm	Height	1000 mm
Gross weight	1000 kg	Volume	0,960 m³		
Min. Quantity	5.100.00 pcs.	Max. Quantity	5.100.00 pcs.		

Tender Text

Profile clamp incl. M 8 slotted stud screw with slotted hexagonal head and clamping plate, for clamp fastening to support profiles with parallel flanges or with inclined flanges up to max. 14% inclination and as supply line to the energy consumers. Depending on the application, the fasteners used may vary!

Dimensions (approx. dimensions)

Height H : 57 mm

Width W : 40 mm

Length L : 47 mm

Threaded connections : M 6

Load-bearing capacity vertical nominal load F1 : 1.8 kN

Load-bearing capacity vertical nominal load F2 : 1.6 kN

Flange thickness of the beam t : 6 - 35 mm

Screw tightening torque : 4 Nm

Width across flats : SW 13

Material : steel, hot-dip galvanised according to DIN EN ISO 1461

NIEDAX Model no. : PKS M6/10-40 F

EP Material_____ EP Wage_____

Unit price/piece

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Technical Datasheet
Supporting structure

PKS M6/10-40 F

the photorealistic images are to be considered as reference images

Origin & International Trade	
Country of origin	TW
Customs tariff number	73269098