



Universal Wall Console

adjustable

GBKV 55-75/50

EAN Code: 4013339463428
Smallest packaging unit:10 pcs.

the photorealistic images are to be considered as reference images

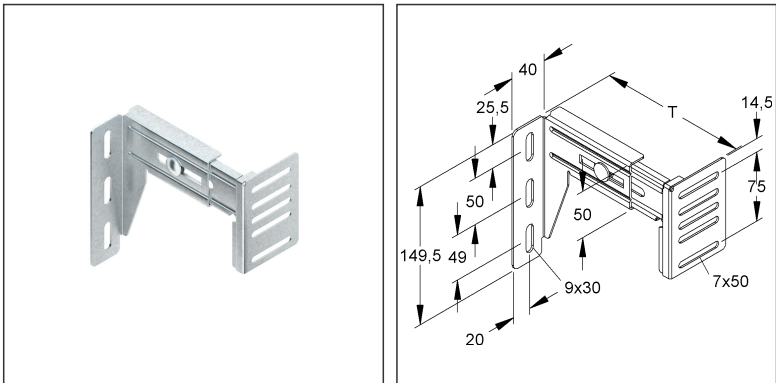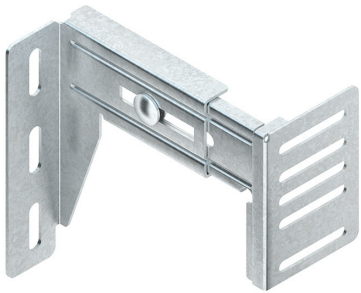

Article Description

Universal wall console, adjustable, wall distance 56-77 mm, steel, pre-galvanised according to DIN EN 10346, incl. accessories

Incl. accessories

2 ZKM 6X16

Additional Price Information

Article group	N17
quantity unit	pcs.

Weight

Weight per quantity unit	314 g/ pcs.
Weight in kg per 100	31 kg/ 100pcs.

Technical Datasheet

Device trunking system

GBKV 55-75/50

the photorealistic images are to be considered as reference images

Physical Article Dimensions

Height	149.50 mm
Width	109.30 mm
Depth/length	

Packing Dimension

10 pieces = 1 carton		✓ VP1-smallest packaging unit (PU) ✓ VP1-preferred PU			
Lenght	260 mm	Width	185.00 mm	Height	120.00 mm
Gross weight	3,43 kg	Volume	0,006 m³		
Min. quantity	10.00 pcs.	Max. Quantity	10.00 pcs.		

360 pieces = 1					
Lenght	750 mm	Width	750 mm	Height	730 mm
Gross weight	163 kg	Volume	0,411 m³		
Min. Quantity	360.00 pcs.	Max. Quantity	360.00 pcs.		

Tender Text

Universal wall console, adjustable, low overall height, suitable for the construction of complete sill systems, the 7x50 mm perforation on the connection side of the wall console corresponds with the back system perforation of the device trunking bottom parts, in conjunction with profile holder GKH... and convection wire mesh profile GKS... and GKG... flush mounting with the window sill (22.5 mm) is possible, including ZKM 6X16 fastening screws for trunking installation.

for device trunking bottom parts : GKH ... DKU ...

for wall distance T : 56 - 77 mm

Overall height H : 50 mm

Standard support distance : ≤ 600 mm

Material wall bracket : steel, pre-galvanised acc. to DIN EN 10346

Material screws : steel, electro-galvanised acc. to DIN EN ISO 4042

NIEDAX Model No. : GBKV 55-75/50

EP Material_____ EP Lohn_____

Unit price/piece

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73089059