


Clamping Claw

incl. sliding nut

SPKGM 25 F

EAN Code: 4013339934959  
Smallest packaging unit: 10 pairs

the photorealistic images are to be considered as reference images

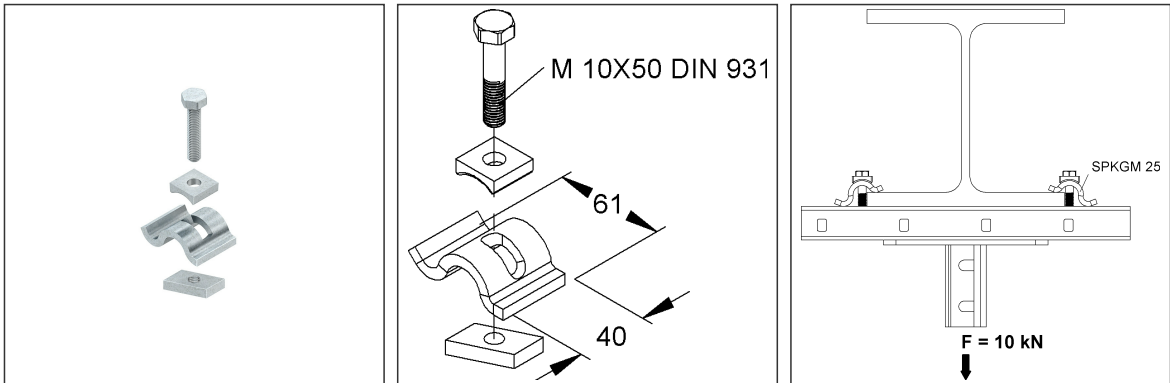

Article Description

Clamping claw with screw and sliding nut, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories

Incl. accessories

1 SK 10X50 DIN 931

Additional Price Information

|               |       |
|---------------|-------|
| Article group | N13   |
| quantity unit | pairs |

Weight

|                          |                  |
|--------------------------|------------------|
| Weight per quantity unit | 500 g / pairs    |
| Weight in kg per 100     | 50 kg / 100pairs |

# Technical Datasheet

## Fastenings accessories

### SPKGM 25 F

the photorealistic images are to be considered as reference images

#### Physical Article Dimensions

|              |          |
|--------------|----------|
| Height       | 57.00 mm |
| Width        | 61.50 mm |
| Depth/length | 40.00 mm |

#### Packing Dimension

##### 1 pair = 1 pair

|               |            |               |            |        |          |
|---------------|------------|---------------|------------|--------|----------|
| Lenght        | 40.00 mm   | Width         | 62.00 mm   | Height | 57.00 mm |
| Gross weight  | 0,5 kg     | Volume        | 0,000 m³   |        |          |
| Min. quantity | 1.00 pairs | Max. Quantity | 1.00 pairs |        |          |

##### 10 pairs = 1 carton

✓ VP2-smallest Packaging Unit ( PU) ✓ VP2-preferred PU

|               |             |               |             |        |          |
|---------------|-------------|---------------|-------------|--------|----------|
| Lenght        | 205 mm      | Width         | 120.00 mm   | Height | 80.00 mm |
| Gross weight  | 5,13 kg     | Volume        | 0,002 m³    |        |          |
| Min. Quantity | 10.00 pairs | Max. Quantity | 10.00 pairs |        |          |

##### 2480 pairs = 1 pallet

|               |                |               |                |        |         |
|---------------|----------------|---------------|----------------|--------|---------|
| Lenght        | 1200 mm        | Width         | 800 mm         | Height | 1000 mm |
| Gross weight  | 1288 kg        | Volume        | 0,960 m³       |        |         |
| Min. Quantity | 2.480.00 pairs | Max. Quantity | 2.480.00 pairs |        |         |

#### Tender Text

Clamping claw, complete with hexagonal bolt SK 10X50 DIN 931 and sliding nut M 10, for fastening suspensions to double T-beam profiles.  
Use for: Rail profile 2986 and 2988 with a slot width of 18 mm  
Rail profile 2996Z with slot width 22 mm  
for flange thickness t with 2986 : 7 - 11 mm  
for flange thickness t with 2988 and 2996Z : 0 - 10 mm  
Screw tightening torque : 46 Nm  
Material : steel, hot-dip galvanised acc. to DIN EN ISO 1461  
NIEDAX Model No. : SPKGM 25 F  
EP Material\_\_\_\_\_ EP Wage\_\_\_\_\_  
Unit price/pair

#### Safety & Environment

|            |             |
|------------|-------------|
| REACH Date | 25.06.2025  |
| REACH Info | Conformable |
| RoHS Info  | Conformable |

#### Origin & International Trade

|                       |          |
|-----------------------|----------|
| Country of origin     | DE       |
| Customs tariff number | 73089059 |