


Clamping Claw

SPKM 25 F

EAN Code: 4013339931040

Smallest packaging unit: 10 pairs

the photorealistic images are to be considered as reference images

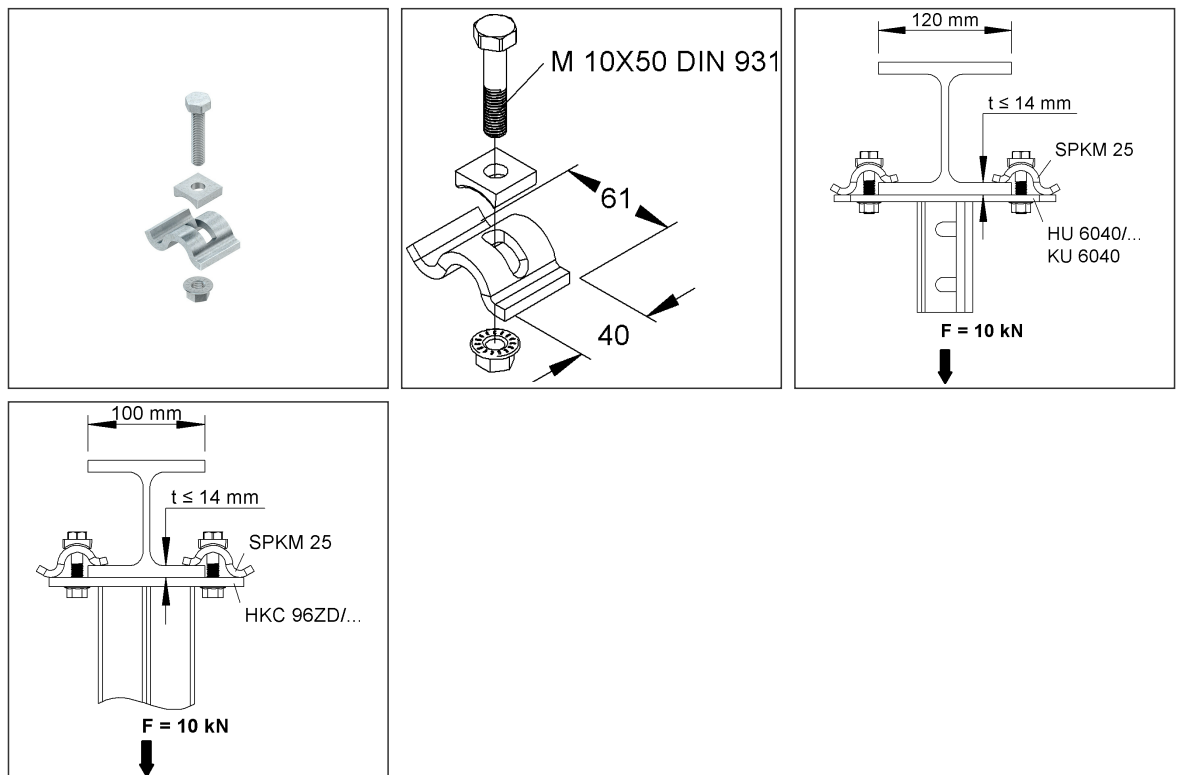

Article Description

Clamping claw with screw and flange nut M10 F DIN 1661-8, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories

Incl. accessories

1 SK 10X50 DIN 931

Technical Datasheet

Fastenings accessories

SPKM 25 F

the photorealistic images are to be considered as reference images

Additional Price Information

Article group	N13
quantity unit	pairs

Weight

Weight per quantity unit	458 g / pairs
Weight in kg per 100	46 kg / 100pairs

Physical Article Dimensions

Height	57.00 mm
Width	56.50 mm
Depth/length	40.00 mm

Packing Dimension

1 pair = 1 pair

Lenght	40.00 mm	Width	57.00 mm	Height	57.00 mm
Gross weight	0,46 kg	Volume	0,000 m³		
Min. quantity	1.00 pairs	Max. Quantity	1.00 pairs		

10 pairs = 1 carton

✓ VP2-smallest Packaging Unit (PU) ✓ VP2-preferred PU

Lenght	160.00 mm	Width	80.00 mm	Height	140.00 mm
Gross weight	4,58 kg	Volume	0,002 m³		
Min. Quantity	10.00 pairs	Max. Quantity	10.00 pairs		

2310 pairs = 1 pallet

Lenght	1200 mm	Width	800 mm	Height	1000 mm
Gross weight	1072 kg	Volume	0,960 m³		
Min. Quantity	2.310.00 pairs	Max. Quantity	2.310.00 pairs		

Tender Text

Clamping claw, complete with hexagon head bolt SK 10X50 DIN 931 and flange nut M 10, for fastening suspensions to double T-beam profiles.
 Use for: direct hanging support suspension HU 6040/... or
 system-related head plates with profile U 6040/...
 direct hanging support suspension STRUT HKC 96ZD/...
 Dimensions (approx. dimensions)
 Flange width T-beam : 120 mm for direct suspension of overhead hangers HU 6040/... as well as head plates belonging to the system
 : 100 mm for direct hanging support STRUT HKC 96ZD/...
 for flange thickness T-beam t : 0 - 14 mm
 Load capacity F : 10 kN
 Screw tightening torque : 46 Nm
 Material : steel, hot-dip galvanised acc. to DIN EN ISO 1461
 NIEDAX Model No. : SPKM 25 F
 EP Material_____ EP Wage_____
 Unit price/pair

Technical Datasheet

Fastenings accessories

SPKM 25 F

the photorealistic images are to be considered as reference images

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73089059