
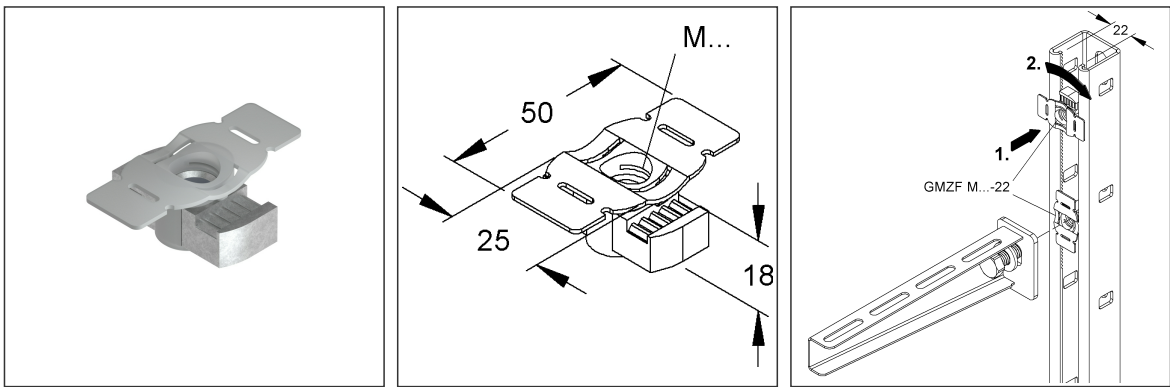


Sliding Nut with Fixing Aid

GMZF M10-22 F

EAN Code: 4013339055517
Smallest packaging unit: 100 pcs.

the photorealistic images are to be considered as reference images

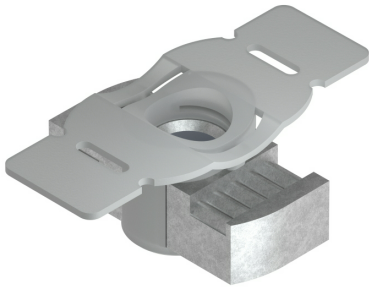

Article Description

Sliding nut with fixing aid, thread M10, for slot width 22 mm, steel, hot dip galvanised DIN EN ISO 10684

Additional Price Information

Article group	N09
quantity unit	pcs.

Weight

Weight per quantity unit	34 g / pcs.
Weight in kg per 100	3,4 kg / 100pcs.

Physical Article Dimensions

Height	18.00 mm
Width	34.00 mm
Depth/length	50.00 mm

Technical Datasheet

Screws and nuts

GMZF M10-22 F

the photorealistic images are to be considered as reference images

Packing Dimension

100 pieces = 1 carton		✓ VP1-smallest packaging unit (PU) ✓ VP1-preferred PU			
Lenght	180.00 mm	Width	135.00 mm	Height	84.00 mm
Gross weight	3,4 kg	Volume	0,002 m³		
Min. quantity	100.00 pcs.	Max. Quantity	100.00 pcs.		

15000 pieces = 1 pallet					
Lenght	1200 mm	Width	800 mm	Height	1000 mm
Gross weight	525 kg	Volume	0,960 m³		
Min. Quantity	15.000.00 pcs.	Max. Quantity	15.000.00 pcs.		

Tender Text

Sliding nut with fastening aid, for C-profiles, for precise fastening without slipping, especially in vertical applications, the sliding nut is screwed into the profile by 90° by means of the fastening aid and can be positioned variably by pressing on, can be used at any point in the profile.

Used for :

C-profiles 2996Z with 22 mm slot width

Wall Bracket STRUT HKC 96Z/...

Overhead Hanger- and Wall Bracket HKC 96ZD/...

Dimensions (approx. dimensions)

Length L x width W : 50 x 25 mm

Total height H : 18 mm

Thread : M 10

Strength class : 8

Material sliding nut : steel, hot-dip galvanised acc. to DIN EN ISO 10684

Material fastening aid : grey polyamide (PA), halogen-free

NIEDAX Model no. : GMZF M10-22 F

EP Material_____ EP Wage_____

Unit price/piece

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	CN
Customs tariff number	73181900