


Cable Support Trough System

KWS 10 F

EAN Code: 4013339055531
Smallest packaging unit: 1 pc.

the photorealistic images are to be considered as reference images

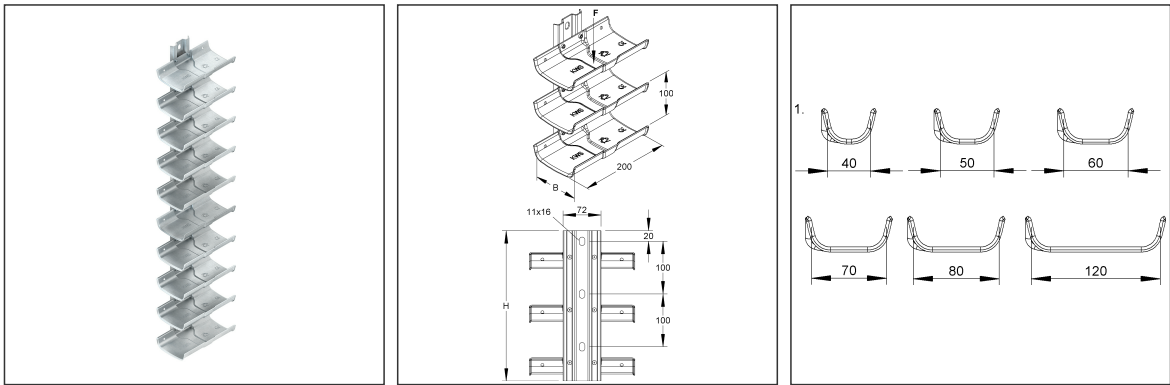

Article Description

Cable support trough system, 10-fold, steel, hot dip galvanised DIN EN ISO 1461

Excl. Accessories

exclusive bolting Fastening material must be ordered separately, depending on the application.

Additional Price Information

Article group	N08
quantity unit	pcs.

Technical Datasheet

Supporting structure

KWS 10 F

the photorealistic images are to be considered as reference images

Weight

Weight per quantity unit	6,517 kg / pcs.
Weight in kg per 100	652 kg / 100pcs.

Physical Article Dimensions

Height	985 mm
Width	121.80 mm
Depth/length	200.00 mm

Packing Dimension

1 piece = 1 piece		✓ VP1-smallest packaging unit (PU)			
Lenght	200.00 mm	Width	122.00 mm	Height	985 mm
Gross weight	6,52 kg	Volume	0,024 m³		
Min. quantity	1.00 pcs.	Max. Quantity	1.00 pcs.		

Tender Text

Cable support tray system, for wall mounting or for fastening to rails.
In accordance with VDE 0298-565-1 and VDE 0298-565-2, a max. support distance of 0.8 m should not be exceeded.
The load-bearing capacity specifications only apply if there is sufficient anchoring to the supporting substrate and if, in the clamping area, the surfaces of the vertically running profile/anchor rails and the tub support rails are made of steel or galvanised steel.
If the clamping area has a coat of paint, this must be removed, otherwise the load-bearing capacity is not given or guaranteed. Danger of slipping!
1. The cable support tray system is available in tray widths of 40, 50, 60, 70, 80 and 120 mm on request.
Fastening material must be ordered separately, depending on the application.
Dimensions (approx. dimensions)
Tray W x L : 100 x 200 mm
Number of trays on top of each other : 10
Distance between the trays : 100 mm
Load capacity F at B/2 : 0.5 kN
Rail H x W : 985 x 72 mm
Rail perforation : 11 x 16 mm
central hole distance : 100 mm
Number of perforations : 10
Material : Steel, hot-dip galvanised acc. to DIN EN ISO 1461
NIEDAX Model No. : KWS 10 F
EP Material_____ EP Wage_____
Unit price/piece

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Technical Datasheet

Supporting structure

KWS 10 F

the photorealistic images are to be considered as reference images

Origin & International Trade

Country of origin	DE
Customs tarif number	73089059