


Cable Tray, heavy

perforated, without connector

RSBS 110.400 OV

EAN Code: 4013339861767
Smallest packaging unit: 2 x 3 m
quantity unit: m M

the photorealistic images are to be considered as reference images

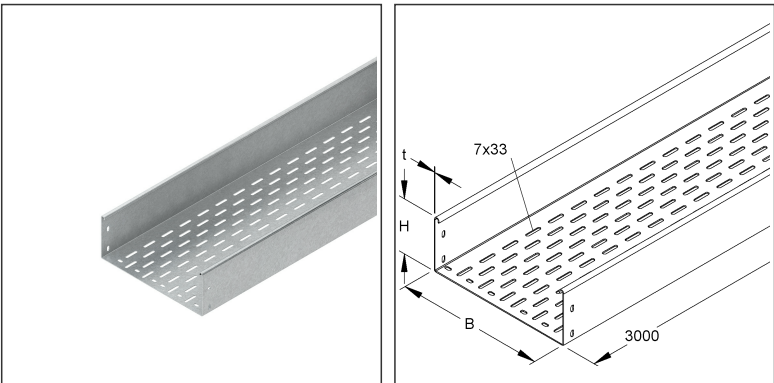

Article Description

Cable tray, heavy, 110x400x3000 mm, perforated, steel, pre-galvanised according to DIN EN 10346, without connector

Additional Price Information

Article group	N13
quantity unit	m

Weight

Weight per quantity unit	9,102 kg / m
Weight in kg per 100	910 kg / 100m

Technical Datasheet

Cable Tray System

RSBS 110.400 OV

the photorealistic images are to be considered as reference images

Physical Article Dimensions

Height	110.00 mm
Width	400 mm
Depth/length	3000 mm

Packing Dimension

6 meters = 1 bundle		✓ VP1-smallest packaging unit (PU)		✓ VP1-preferred PU	
Lenght	3000 mm	Width	405 mm	Height	115.00 mm
Gross weight	55 kg	Volume	0,140 m³		
Min. quantity	6.00 m	Max. Quantity	6.00 m		

96 meters = 1 rack					
Lenght	3000 mm	Width	1162 mm	Height	1120 mm
Gross weight	972 kg	Volume	3,904 m³		
Min. Quantity	96.00 m	Max. Quantity	96.00 m		

Tender Text

Cable tray, heavy, according to DIN EN 61537, with offset continuous floor perforation for continuous fastening and connection of the system components as well as unperforated side walls, without connectors but with connector perforation at both ends for connection, for the walkable cable tray system Please order two universal splice plates RSUV 110-1.5 / RSUVKS 110-1.5 S per joint separately.

Dimensions (approx. dimensions)

H x W : 110 x 400 mm

Material thickness t : 2 mm

Bottom perforation : 7 x 33 mm

Delivery length L : 3000 mm

Usable cross-section : 43800 mm²

Material : Steel, pre-galvanised to DIN EN 10346

NIEDAX Model No. : RSBS 110.400 OV

EP Material_____ EP Wage_____

Unit price/meter

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73089059

Technical Datasheet

Cable Tray System

RSBS 110.400 OV

the photorealistic images are to be considered as reference images

Related items

Cover

Model No.	Description
RDHFS 9 VZL	Cover clamp, steel, electro galvanised according to DIN EN ISO 2081, blue passivate
RDRS 400-2.0 S	Cover for cable tray, antislip, 405x3000 mm, steel, pre-galvanised according to DIN EN 10346
RDRS 9X2	Turning bolt, reinforced design, steel, pre-galvanised according to DIN EN 10346
RDS 400	Cover for cable tray, 405x3000 mm, steel, pre-galvanised according to DIN EN 10346
RDSRS 400	Cover for cable tray, antislip, 405x3000 mm, t=6,0 mm, steel, pre-galvanised according to DIN EN 10346
RDSRSL 400	Cover for cable tray, antislip, 405x3000 mm, t=4,0 mm, steel, pre-galvanised according to DIN EN 10346
RDVS 400	Cover for cable tray, 405x3000 mm, with turning bolt, steel, pre-galvanised according to DIN EN 10346
RDVSR 400	Cover for cable tray, antislip, 405x3000 mm, t=6,0 mm, steel, pre-galvanised according to DIN EN 10346
RDVSRSL 400	Cover for cable tray, antislip, 405x3000 mm, t=4,0 mm, steel, pre-galvanised according to DIN EN 10346

Barrier strip

Model No.	Description
RTSKQ 110-1.5 S	Barrier strip, 108x2998 mm, steel, pre-galvanised according to DIN EN 10346, incl. accessories
RTSKQ 110-2.0 S	Barrier strip, 108x2998 mm, steel, pre-galvanised according to DIN EN 10346, incl. accessories
RTSQF 110-1.5/1000 S	Barrier strip, flexible, 108x1000 mm, steel, pre-galvanised according to DIN EN 10346, incl. accessories
RW 110-1.5 S	Barrier strip, 108x2998 mm, t=1,5 mm, steel, pre-galvanised according to DIN EN 10346, incl. accessories
RW 110-2.0 S	Barrier strip, 108x2998 mm, t=2,0 mm, steel, pre-galvanised according to DIN EN 10346, incl. accessories