



Overhead Hanger- and Wall Bracket

epoxied, standard

KTA 200 C1KG

EAN Code: 4013339967223
 Smallest packaging unit:1 pc.

the photorealistic images are to be considered as reference images

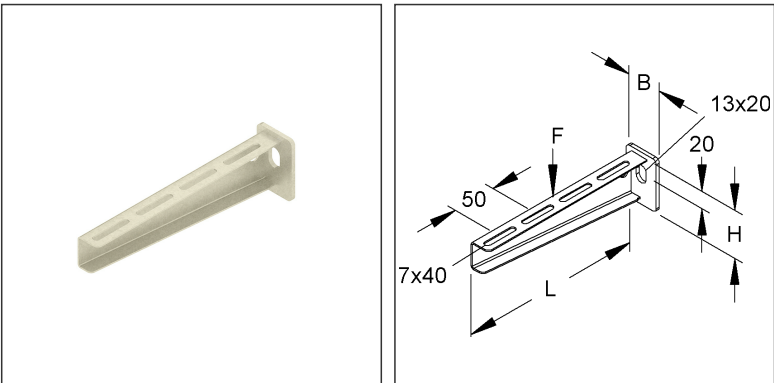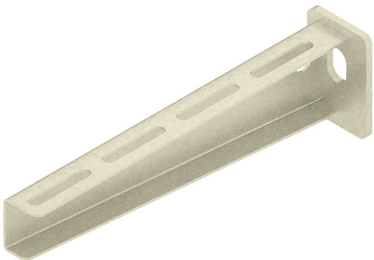

Article Description

Overhead hanger- and wall bracket, standard, 55x210 mm, 2,5 kN, epoxy coating 60-80 µm, RAL 7032, incl. accessories

Incl. accessories

1 piece = 1 piece		✓ lowest delivery unit	– preferred delivery unit
Model No.	Description	quantity	
FLM 6X12 E5	Mushroom-head bolt M6, similar DIN 603, length 12 mm, stainless steel, material 1.4571, AISI 316Ti, incl. toothed flange nut	2 pcs.	

Excl. Accessories

exclusive bolting	Please order the necessary fastening accessories separately: for cable trays KK... und KP...: 2 FKM 6X20 E4 for cable ladders UL...: 2 ULKG, 2 BKM 6X30 E4, 2 UGM 6 E5 alternative 2 HSK 10 E5, 2 BKM 6X30 E4, 2 UGM 6 E5
-------------------	--

Technical Datasheet

Supporting structure

KTA 200 C1KG

the photorealistic images are to be considered as reference images

Additional Price Information

Article group	N13
quantity unit	pcs.

Weight

Weight per quantity unit	287 g / pcs.
Weight in kg per 100	29 kg / 100pcs.

Physical Article Dimensions

Height	60.00 mm
Width	40.00 mm
Depth/length	214 mm

Packing Dimension

1 piece = 1 piece		✓ VP1-smallest packaging unit (PU)			
Lenght	214 mm	Width	40.00 mm	Height	60.00 mm
Gross weight	0,29 kg	Volume	0,001 m³		
Min. quantity	1.00 pcs.	Max. Quantity	1.00 pcs.		

Tender Text

Overhead hanger and wall bracket, standard, for wall and overhead hanger mounting, including proportional fastening accessories in stainless steel, material no. 1.4571, AISI 316Ti. The carrying capacity data are only valid if there is sufficient anchored to the supporting ground or if they are mounted on overhead hangers acc. to regulations.

Dimensions (approx. dimensions)

Support height H : 55 mm

Support length L : 210 mm

Load capacity F at L/2 : 2.5 kN tested in the system

Colour : pebble grey

RAL : 7032 (similar)

Surface coating : Epoxy polyester resin coating 60 - 80 µm, halogen-free

Material of the bracket : steel, hot-dip galvanised acc. to DIN EN ISO 1461

NIEDAX Model No. : KTA 200 C1KG

EP Material_____ EP Wage_____

Unit price/piece

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73089059