



Support

asymmetrical, closed, unperforated

RSSTAU 108.300 V

EAN Code: 4013339141920
Smallest packaging unit: 1 pc.

the photorealistic images are to be considered as reference images

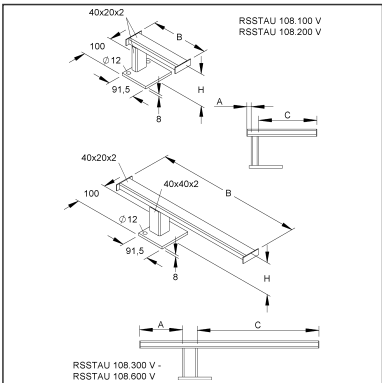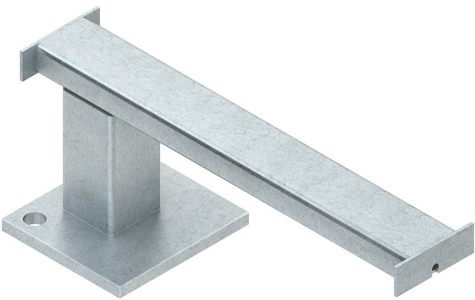

Technical Datasheet

Supporting structure

RSSTAU 108.300 V

the photorealistic images are to be considered as reference images

Physical Article Dimensions

Height	108.00 mm
Width	292 mm
Depth/length	100.00 mm

Packing Dimension

1 piece = 1 piece		✓ VP1-smallest packaging unit (PU)			
Lenght	100.00 mm	Width	292 mm	Height	108.00 mm
Gross weight	1,26 kg	Volume	0,003 m³		
Min. quantity	1.00 pcs.	Max. Quantity	1.00 pcs.		

250 pieces = 1		✓ VP2-preferred PU			
Lenght	1230 mm	Width	840 mm	Height	970 mm
Gross weight	384 kg	Volume	1,002 m³		
Min. Quantity	250.00 pcs.	Max. Quantity	250.00 pcs.		

Tender Text

Floor support, asymmetrical, closed, unperforated, for laying cable trays over conduits of walkable cable trays laid close to the floor, consisting of a horizontal steel conduit and a vertical steel conduit and a rectangular floor plate with fastening holes.

Used for : walkable cable trays

Dimensions (approx. dimensions)

Support height H : 108 mm

Support width W : 292 mm

asymmetrical horizontal steel conduit Dimension A : 18 mm

asymmetrical horizontal steel conduit Dimension C : 234 mm

horizontal steel conduit acc. to DIN EN 10219-2 : 40 x 20 x 2 mm

vertical steel conduit acc. to DIN EN 10219-2 : 40 x 40 x 2 mm

Material : steel, electro galvanised acc. to DIN EN ISO 19598, blue passivated

NIEDAX Model No. : RSSTAU 108.300 V

EP Material_____ EP Wage_____

Unit price/piece

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	TR
Customs tariff number	73089059