

Wire Mesh Tray

V-shaped, spot-welded from steel wires, with welded connector

MTCT 100 F NXCITO_{Line}




EAN Code: 4013339191017

Smallest packaging unit:3 m

quantity unit:m M



the photorealistic images are to be considered as reference images

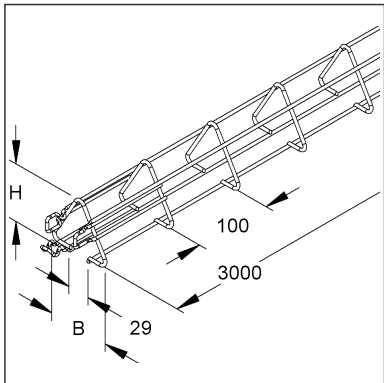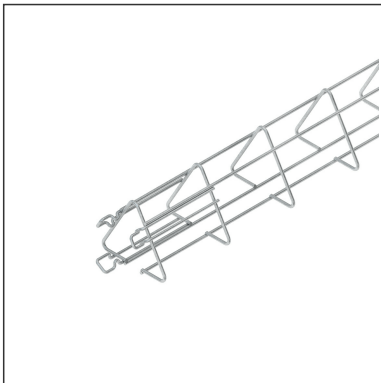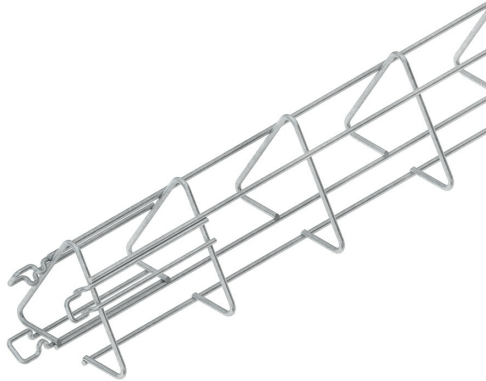

Article Description

Wire mesh tray, V-shaped, w. welded connector, 80x80x3000mm, CITO, steel, hot-dip galvanised acc. DIN EN ISO 1461

Additional Price Information

Article group	N13
quantity unit	m

Weight

Weight per quantity unit	653 g / m
Weight in kg per 100	65 kg / 100m

Technical Datasheet

Wire Mesh Tray System

MTCT 100 F NXCITO_{Line}

the photorealistic images are to be considered as reference images

Physical Article Dimensions

Height	75.00 mm
Width	80.00 mm
Depth/length	3028 mm

Packing Dimension

3 meters = 1 piece		✓ VP1-smallest packaging unit (PU)			
Lenght	3028 mm	Width	80.00 mm	Height	75.00 mm
Gross weight	1,96 kg	Volume	0,018 m³		
Min. quantity	3.00 m	Max. Quantity	3.00 m		

6 meters = 1 bundle					
Lenght	3028 mm	Width	85.00 mm	Height	80.00 mm
Gross weight	3,92 kg	Volume	0,021 m³		
Min. Quantity	6.00 m	Max. Quantity	6.00 m		

Tender Text

Wire mesh tray according to DIN EN 61537, V-shaped, made of steel wires, spot-welded, for quick fastening with welded splice plates on the trigonal sides.
Dimensions (approx. dimensions)
Nominal dimension H x W (outside) : 80 x 80 mm
Longitudinal wire Ø : 3.9 mm
Central longitudinal wire spacing : 25 mm
Transverse wire Ø : 3.9 mm
Transverse wire spacing : 100 mm
Delivery length L : 3000 mm
Usable cross-section : 1800 mm²
Material : steel, hot-dip galvanised according to DIN EN ISO 1461
NIEDAX Model no. : MTCT 100 F
EP Material_____ EP Wage_____
Unit price/metre

Safety & Environment

REACH Date	21.01.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	
Customs tarif number	73089098