




US standard



GROWING TOGETHER

SR 234

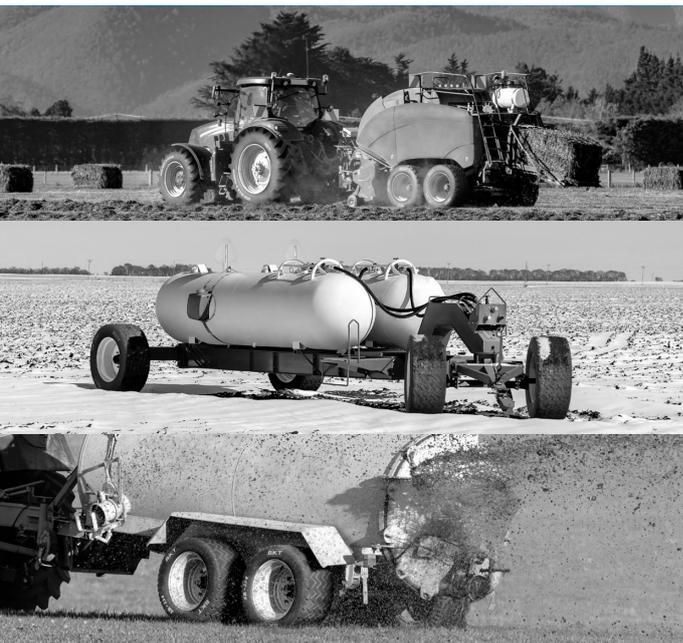

PRODUCT DATA SHEET



Radial



Technologies



All Steel



VF Technology



Steel Belted



Larger Footprint



Special Compound

Performance



Reduced Soil Compaction



Comfort



Field Protection



Traction



Durability



Low Rolling Resistance



Fuel Economy



SR 234

SR 234 is a versatile All-Steel radial tire for agricultural implements that can be fitted on harvesters and balers, tillage toolbars, seeders, large feed mixers, and anhydrous ammonia trailers. Designed with VF (Very High Flexion) technology, SR 234 can carry up to 40% more load than a standard tire of the same size at the same inflation pressure. Thanks to its wide footprint and ability to operate at lower pressure, this VF tire ensures reduced soil compaction preserving soil fertility and porosity in addition to enhanced traction. The strong steel-belted casing and a multi-rib tread pattern along with a specially engineered compound provide uniform tread wear and great durability. The low rolling resistance enhances fuel efficiency on the road and a smooth ride. The hexagonal bead has been designed for easy mounting and a secure rim fitment. SR 234 is the ideal tire for operators looking for great performance both in the fields and on the road.

	US CODE	Tire size	LI/SS	RIM		O.W. (In.)	O.D. (In.)	SLR (In.)	RC (In.)	TREAD DEPTH (32nds)	TIRE WEIGHT (lbs)	Version
				Rec.	Alt.							
Ø 22.5"	94512799	VF 445/50 R 22.5	167 D	14.00	-	17.2	40.1	17.8	120.1	20	196	STD

STD: Standard



Tolerances: O.D. ± 2% - O.W. ± 2% - RC ± 2.5% - LI/SS = Load Index / Speed Symbol; O.W. = Overall Width; O.D. = Overall Diameter; SLR = Static Loaded Radius; RC = Rolling Circumference