
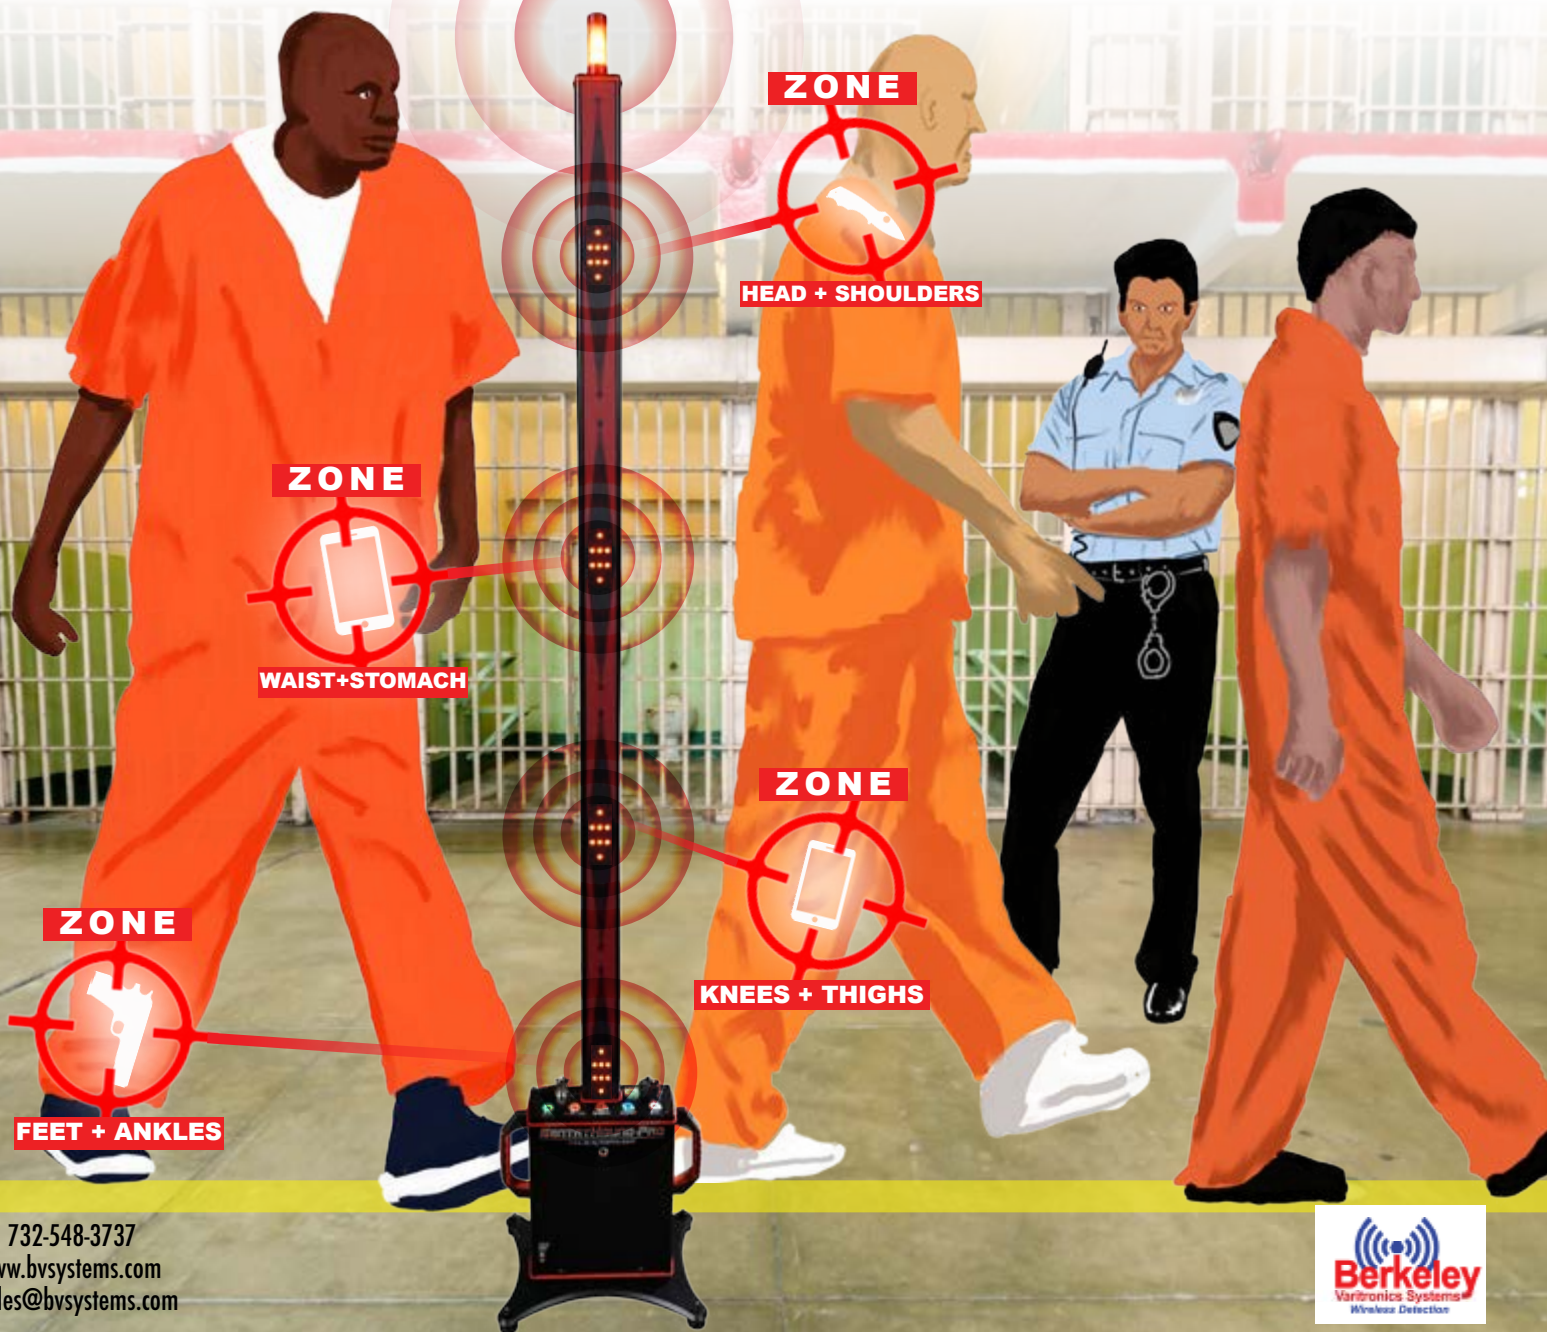


SENTRY HOUND™-PRO

SINGLE POLE FERROMAGNETIC CONTRABAND SCREENER

- Single pole setup anywhere in under 30 seconds
- Lightweight, versatile & all day battery power
- Sealed against the elements for rugged indoor/outdoor use
- Add a 2nd pole for double duty or double detection range

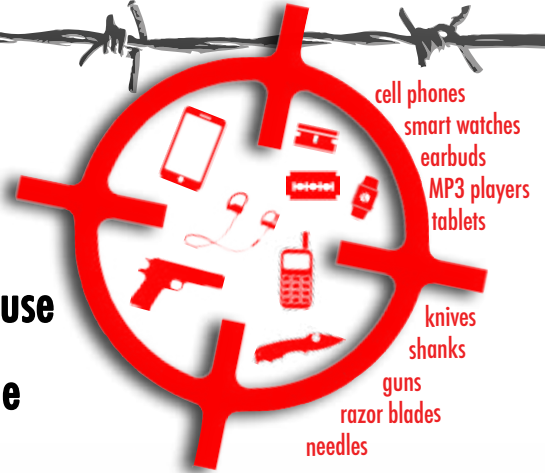

SENTRYHOUND-PRO™

SINGLE POLE FERROMAGNETIC CONTRABAND SCREENER



SENTRYHOUND-PRO VERSATILITY



TECHNICAL SPECIFICATIONS:

SENSORS

4 independent sensors (per pole) - 1 for each zone (head/shoulders, chest/waist, thighs/knees, ankles/feet)

DETECTION METHOD

Passive ferromagnetic detection completely safe (no radiation emitted) for pregnant women, pacemakers & medical implants

DETECTION PATHWAY

Diamond-shaped motion sensor formed between bases

(TWO POLE SETUP)

(virtual mat isolates ferromagnetic detection to only between the 2 sensor poles)

SYNCHRONIZATION

IR connection & motion sensors tether poles for enhanced false trigger rejection

HORIZONTAL RANGE*

32 to 64 inches between 2 gated sensor poles

18 to 32 inches using single sensor pole

VERTICAL RANGE

75 inches (from head to toe)

DETECTION USE CASES

Inside visitors' bags, purses, clothing, shoes, hats, wallets, pockets, etc.

Inside prisoners' uniforms, braiers, shoes, hair, body cavities, etc.

Inside mattresses, suitcases and other large contraband inspections

Inside and other side of walls for covert searches and scans

ALERTS

Omni-directional, daylight-bright, top dome color blinking LEDs

Directional blinking color LEDs (zone specific for security personnel)

Integrated siren with adjustable volume

Dry trigger contacts for alarms, DVRs, video surveillance, intrusion detection systems, etc.

ON/OFF security key lock for all functions

SECURITY

SENSITIVITY

4 levels (user selectable)

SETUP

Plug and play out of the box with less than 30 seconds from powering up to full operation. No software or assembly required

POWER

110VAC daily operation & internal rechargeable (full charge in 3 hours) 12VDC battery (sealed gel cell) lasts over 24 hours

WEIGHT

17 lbs. fully assembled

DIMENSIONS

68" H x 12" L x 8" W (fully assembled single pole and base unit)

OPTIONS

Wall mounting kit, hard transport case, on-site training, extended warranty

*Every device contains different amounts of ferrous material so they do not all trigger from the same distance. SentryHound-Pro will trigger at the high end of the distance range for most every device containing ferrous material.