


## 8 Pair Port PoE Mid-Span Power Supply Gigabit (Data in/out)

### Quick Installation Guide

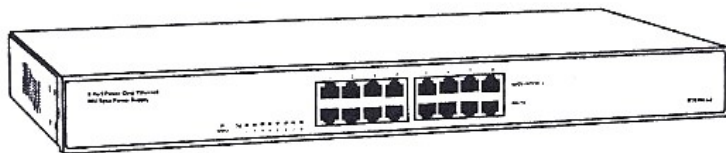

### FCC Warning

This device has been tested and found to comply with limits for a Class A digital device, pursuant to Part 15 of FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates and radiates radio frequency energy and, if not installed and used in accordance with the user's manual, it may cause interference in which case users will be required to correct interference at their own expenses.

### CE Warning

This is a Class A product. In a domestic environment, this product may cause radio interference in which case the user may be required to take adequate measures.

### Introduction

This PoE Mid-span is 8-pair port power supply consisting of 8 Ethernet data input ports, and 8 Ethernet data output ports with 48V power equipped, which is fully IEEE 802.3af compliant. Any Ethernet "Data" cable can directly connect to the input port and then come out "Data + Power" from output port. It is smart plug and play and very easy to install in any existing networking system, to bring in PoE features without any new reconfiguration.


The rack-mount size was specifically designed for medium to large workgroups. The Switch can be installed where space is limited; moreover it provides smooth network migration and easy upgrade to network capacity. The 19" size can be rack-mount on 19" cabinet.



## Package Contents


Before you start to install this switch, please verify your package that contains the following items:

- One PoE Mid-Span Power Supply
- Rack-mount Kit for Rack Installation
- One Power Cord
- One Quick Installation Guide

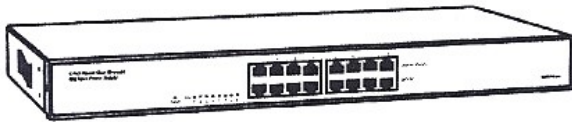


8 Pairs Ports Power - Injector Hub

User's Manual

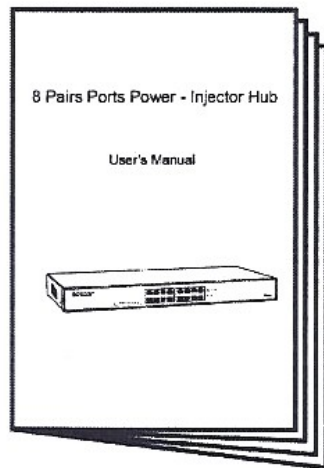

Power Cord




Rack-mountKit

## Front Panel (LEDs)

### LED Indicators of 8 Pair Port PoE Mid-Span Power Supply

LED	Status	Description
Power	On	Power is on.
	Off	Power is off.
PD Link	On	Port is connected to a Power Device port
	Off	No Power Device is connected

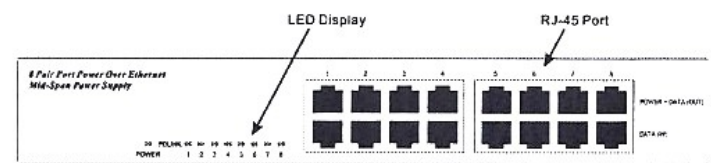

## Connections

### Power Device/Existing Switch to this 8 Pair Port Mid-Span Power Supply


Use Cat. 5 twisted-pair cable from the existing switch to the "Data" input port of this Mid-span Power Supply, and then connect the "Data + Power" output port to the Power Device, such as Wireless AP, another switches with PD function...etc.

Note: If any of these items is found missing or damaged, please contact your local supplier for replacement.

## Key Features

- 8 "Data" input ports compliant with IEEE 802.3 10BaseT, IEEE 802.3u 100BaseTX and IEEE 802.3ab 1000BaseT
- 8 "Data + Power" PSE/PoE output ports compliant with IEEE 802.3 10BaseT, IEEE 802.3u 100BaseTX, IEEE 802.3ab 1000BaseT and IEEE 802.3af PoE
- Supporting the power Max. 15.4 W for each PSE/PoE port
- 19" rack-mount size
- Each output port has output current limited, short-circuit protection, complete Power Device (PD) detection and classification
- Smart plug & play

## Power-over-Ethernet Switches

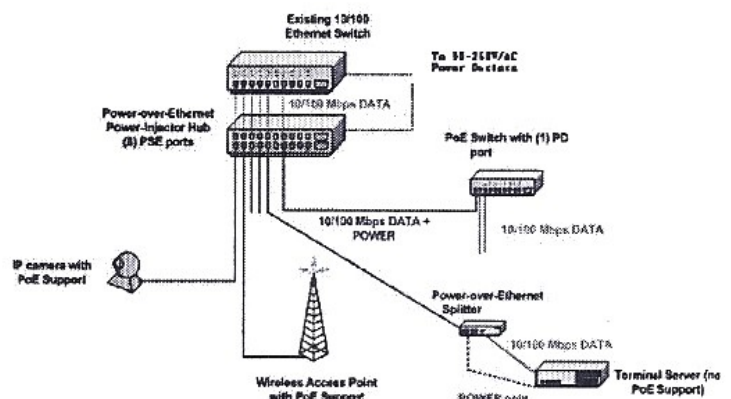




## Rear Panel (Power)

### AC input

AC input (90~260V/AC, 50~60Hz) UL Safety

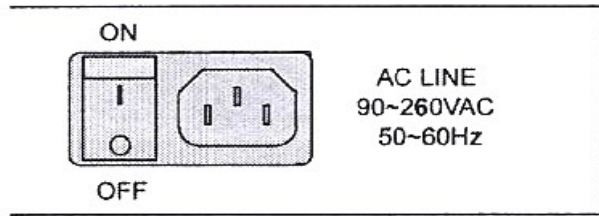

## Technical Specifications

BUY ON  
[www.cablematic.com](http://www.cablematic.com)

<b>Standards</b>	IEEE 802.3af IEEE 802.3 10BaseT IEEE 802.3u 100BaseTX IEEE 802.3ab 1000BaseT
<b>Features</b>	Number of Ports: 8 10/100/1000BaseT Data-In Ports 8 10/100/1000BaseT Data out and Power-Out Ports
<b>LED Indicators</b>	Per Port: PoE ACT/Status Per Unit: Power
<b>Power Input</b>	100~240V/AC, 50~60Hz
<b>Power Output</b>	48V/DC Per Port Output – 15.4 W Max Per Port 8 Ports at Full 15.4 W Output Supported
<b>Power Consumption</b>	130 Watts (Max)
<b>Dimensions</b>	440 × 220 × 44 mm (L x W x H)
<b>Weight</b>	2.5 kg
<b>Operating Temperature</b>	0 to 40°C
<b>Storage Temperature</b>	-20 to 90°C
<b>Humidity</b>	10 to 90% RH (non-condensing)
<b>Certifications</b>	FCC Class A, CE