


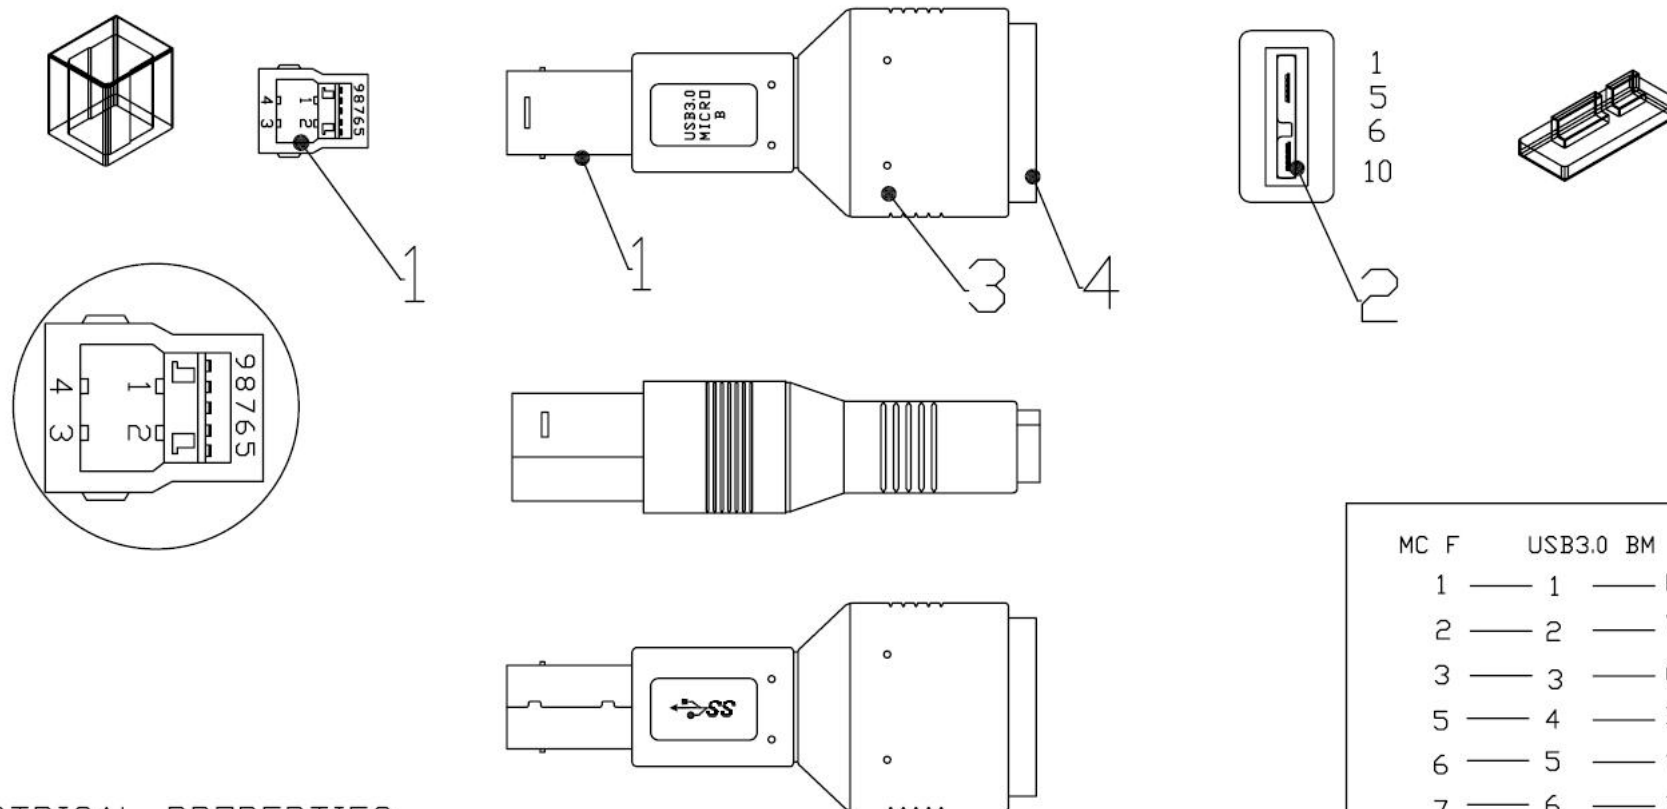

ELECTRICAL PROPERTIES:

1. 100% OPEN SHORT MIS-WIRE TEST
2. CONTACT RESISTANCE:100MHM
3. INSULATION RESISTANCE:5MEGA OHM
4. HIPOT TEST:300V/10MS

MC F	USB3.0 BM	COLOR
1	1	RED<PWR>
2	2	WHITE<UTP_D->
3	3	GREEN<UTP_D+>
5	4	BLACK<GND_PWRrt>
6	5	YELLOW<SDP1->
7	6	BLUE<SDP1+>
8	7	DRAIN<SDP1_Drain> <SDP2_Drain>
9	8	ORANGE<SDP2->
10	9	PURPLE<SDP2+>
SHELL	SHELL	BRAID

4	ABS MOLDING BLACK IN COLOR	1	pcs
3	55P PVC MOLDING BLUE IN COLOR	1	pcs
2	USB3.0 MICRO A+B TYPE FEMALE SHELL PLATED:NICKEL CONTACT:30U"	1	pcs
1	USB3.0 B TYPE MALE SHELL PLATED:NICKEL CONTACT:30U"	1	pcs
DESCRIPTION		Q'TY	UNIT
A		10/09/23	
REV.	DESCRIPTION	DATE	

UNLESS OTHERWISE SPECIFIED TOLERANCE			
ANG.	±5°		
0.	±0.5		
.0	±0.3		
.00	±0.2		
SCALE:	NONE	UNIT:	mm
DRAWN	Steven	10/09/23	DRAWN NAME:
CHECKED	Eric	10/09/23	PRODUCT NO.
APPROVED			FILE NAME:

競捷 UY23