www.cablematic.com

Features:

- Bolted and stable structure, cabinets could be assembled in 5 minutes.
- Reversible 5mm toughened glass front door with lock.
- Removable side panels with side pins, side locks are optional for protection.
- Cable entries on both of top cover and bottom panel.
- Wall mounted panel locked from inside with screw, avoid to be stolen or dropped off.
- Delivery in flat packing in 1 carton box to save shipping space and storage.



Specifications:

- · Material: SPCC cold rolled steel
- Thickness: Mounting rails: 1.5mm; others: 1.0mm
- · Surface finishing: Degreasing, pickling, phosphoric, powder coated
- · Static loading capacity: 60kgs

Standards:

- · ANSI/EIA RS-310-D,
- IEC60297-2; DIN41494, PART1; DIN41494, PART7
- · Compatible with 19" International Standards, ETSI







Standard side panel

Тор

Optional front door

Optional accessories:









1U cantilever shelf


PDU

L rail

1U cable manager

www.cablematic.com

Structure of cabinet

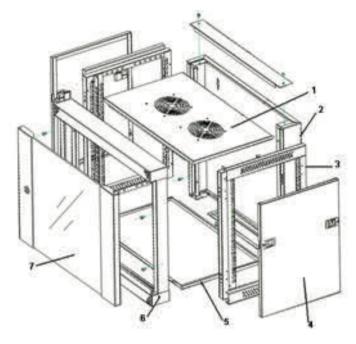

Front door options:

- 1-1: toughened glass door, with small round lock
- 1-2: toughened glass door with stripped hole border, with small round lock
- 1-3: toughened glass door with net hole border, with spring lock
- 1-4: metal plate door, with small round lock
- 1-5: perforated door, with spring lock

Main parts:

S/N	Specification	Qty	Unit	Material	Surface finishing	Remark
1	Тор	1	рс	SPCC	Powder coated	
2	Back frame	1	рс	SPCC	Powder coated	
3	Side frame	2	рс	SPCC	Powder coated	
4	Side panel	2	рс	SPCC	Powder coated	
5	Bottom	1	рс	SPCC	Powder coated	
6	Front frame	1	рс	SPCC	Powder coated	
7	Toughened glass front door (1-3)	1	рс	SPCC	Powder coated	Spring lock
8	Cable entry cover	2	рс	SPCC	Powder coated	

Specifications:

Width (mm)	Depth (mm)	Capacity	Height (mm)	Assembled packing dimension (mm)	SKD Volume (cbm)
	450	4U	280	590*470*300	0.04
		6U	370	590*470*390	0.043
		9U	500	590*470*520	0.051
		12U	635	590*470*655	0.064
		15U	770	590*470*790	0.077
F-70		18U	900	590*470*920	0.09
570		22U	1080	590*470*1100	0.11
	600	6U	370	590*620*390	0.043
		9U	500	590*620*520	0.051
		12U	635	590*620*655	0.064
		15U	770	590*620*790	0.077
		18U	900	590*620*920	0.09
		22U	1080	590*620*1100	0.11

Remark: ① these items are not shown in the drawing, but they are the standard parts of cabinets.