

# INDEPENDENT BATTERY CERTIFICATE



CERTIFICATE NUMBER: DF85D499-977B-4C5C-9B77-65D87DF837CC

## VEHICLE

**BRAND:** Tesla  
**MODEL:** Model 3 - 82,1 kWh

**MILEAGE:** 106,969 km  
**VIN:** 5YJ3E7EB7MF958349  
**DATE AND TIME:**  
13.01.2026, 14:23:39

**EXECUTED BY:** Carla AB

## RESULTS

### STATE OF HEALTH (SOH)

# 91.9 %

#### ENERGY

72kWh | 78kWh




#### WLTP RANGE

564km | 614km

## RATING

### BENCHMARKING

How does your vehicle compare to comparable vehicles?

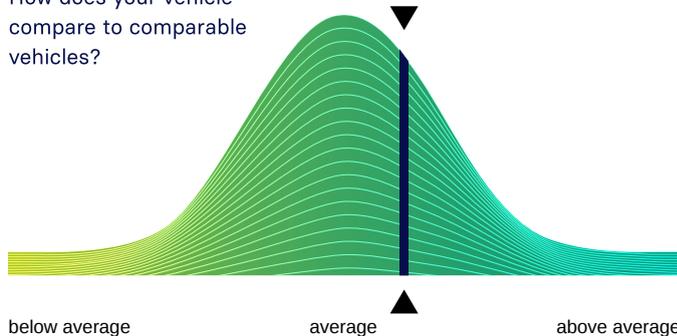

below average

average

above average

## CHECKS

- Battery Management System (BMS) ✓
- Battery Sensor ✓
- Battery Measurements ✓
- Battery Cell Voltages ✓
- Vehicle Communication ✓



SCAN FOR

DETAILS

## EVALUATION

### GOOD HEALTH - NO ABNORMALITIES DETECTED

Based on the detailed battery diagnostics performed with the AVILOO FLASH Test, we hereby certify that the drive battery of this vehicle is in good condition.

The drive battery is therefore officially AVILOO Certified.

Dr. Marcus Berger, CEO



**ENERGY**

	Gross	Net (Nominal)	Usable
Current:	75.5kWh	71.6kWh	67.3kWh
New:	82.1kWh	77.9kWh	73.2kWh

**RANGE**

	WLTP	Typical	Individual
Current:	503-564km	402km	331km
New:	547-614km	438km	360km

**EXECUTION PROTOCOL**

<b>AVILOO Box connected.</b>	<b>14:23:35</b>
FLASH Test started.	✓
Vehicle detected.	✓
Starting data acquisition.	✓
Finished data acquisition.	✓
Analyzing data.	✓
Analysis completed.	✓

**SENSORS**

Voltage Sensor	✓
Current Sensor	✓
Temperature Sensors	✓
Cell Voltage Sensors	✓

**BMS**


	Value	Status
BMS State of Charge (SoC)*:	98%	
SoC calculation accuracy:		✓
BMS State of Health (SoH)*:	85%	
SoH calculation accuracy:		✓

**MEASUREMENTS**

	Min	Max	Delta	Status
Battery Temperature	21.5°C	22.5°C	1.0°C	✓
Cell Voltage	4.146V	4.150V	4mV	✓
Pack Voltage	398.1V			
Average Current	-2.4A			

**CELL VOLTAGES DIAGRAM**

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
1 - 20	4.149	4.150	4.150	4.150	4.150	4.150	4.149	4.150	4.150	4.150	4.150	4.149	4.150	4.150	4.150	4.150	4.150	4.150	4.150	4.150
21 - 40	4.150	4.150	4.150	4.149	4.150	4.149	4.149	4.149	4.149	4.149	4.149	4.149	4.149	4.149	4.149	4.149	4.149	4.149	4.149	4.149
41 - 60	4.149	4.149	4.149	4.149	4.149	4.149	4.149	4.149	4.149	4.149	4.149	4.149	4.149	4.149	4.149	4.149	4.149	4.149	4.149	4.149
61 - 80	4.149	4.149	4.149	4.149	4.149	4.149	4.150	4.149	4.150	4.150	4.150	4.150	4.150	4.150	4.150	4.150	4.150	4.150	4.150	4.150
81 - 96	4.149	4.149	4.150	4.149	4.149	4.149	4.149	4.149	4.150	4.150	4.149	4.146	4.149	4.149	4.149	4.149	/	/	/	/

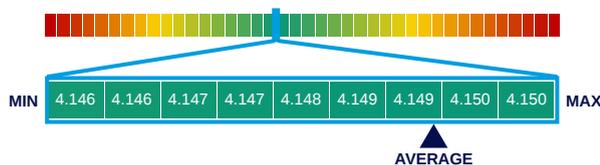

\*The values shown here were not calculated by AVILOO but correspond to the values read out from the battery management system (BMS) and were calculated by the manufacturer. AVILOO therefore assumes no liability for their accuracy.

**DISCLAIMER:** The test result includes the currently calculated state of health (SoH) of the drive battery. The determination is based on data provided by the vehicle. These are evaluated by AVILOO's algorithms using statistical and analytical models. Manipulation of the data in the control unit leads to an incorrect result. The indicated SoH has a technically induced fluctuation range (deviation) of no more than 3% in at least 95% of reference measurements. It should be noted that this tolerance applies to the SoH determination at the cell level and not to the SoH of the entire battery. This is because the state of charge of individual cells may vary, which can negatively affect the current SoH of the battery. However, this can be compensated by the Battery Management System (BMS) or during a calibration. The result reflects the condition of the battery at the time of the test. No conclusions can be drawn about the future state of health of the battery from this. Statements about mechanical damage or external influences are not part of this diagnosis.