



Datasheet

RS PRO 1m USB 2.0 Mini A Male to USB 2.0 Mini B Male - Black


Stock number: 2369084

EN

The RS PRO 1 metre USB version 2.0 Mini A male to Mini B male cable has a beige PVC jacket. The cable flex has copper wire conductors and drain wire, with an aluminium braid, foil shielding and has an outer diameter of 4.0mm.

The connectors and pins are made from nickel and also have PVC hoods.

USB Mini B male to Mini B male cables are used to connect mobile device together.

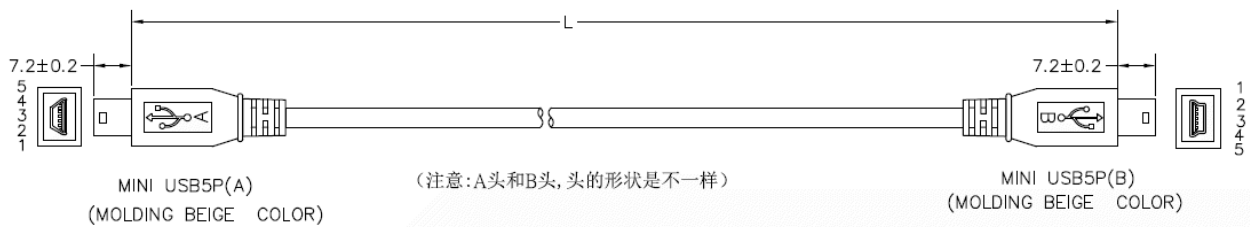

MINI USB5P(A)	1	2	3	5	64
MINI USB5P(B)	1	2	3	5	64
	RED	WHITE	GREEN	BLACK	DRAIN
	PAIR				

- CABLE: UL2725,USB 2.0,AL+B-FOIL,#28*1P+#28*2C,BEIGE COLOR,OD=4.0mm,PVC JACKET.
- LENGTH: L.
- CONNECTORS: MINI USB5P(A)*1(BLACK INSULATOR)*1PCS(SHELL NICKEL).
MINI USB5P(B)*1(BLACK INSULATOR)*1PCS(SHELL NICKEL).
- MOLD: MOLDING USB4P(A) TYPE.
- CONTACTS
- OPEN/SHORT TEST: 100% TEST.
A.100% OPEN,SHORT&INTERMITANCE TEST.
B.CONDUCTOR RESISTANCE: 5ohms MAX:
C.INSULATION RESISTANCE: 10M Min/,10ms:DC300V.
- ALL MUST BE MEET ON ROHS COMPLIANT.

RoHS / REACH / CE / UKCA

rspro.com