RF / Coaxial Cable Assembly IP67, RP SMA Bulkhead Jack to MHF4 Right Angle Plug






Electrical Performance

Impedance : 50Ω

Frequency Range : DC \sim 6.0 GHz Working Voltage : 60Vrms Max. Dielectric with Standing Voltage : 200Vrms Max. Insulator Resistance : 500M Ω Min.

RoHS Compliant

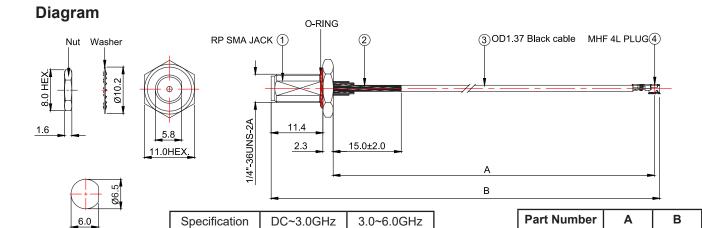

1.65: 1Max.

1.4: 1Max

Item	Description	Qty.
1.	RP SMA IP67 B/H Jack Crimp type for Ø1.37mm cable	1
2.	Heat Shrink Tube F32 OD: 2.5mm L=15mm Colour: Black	2
3.	OD: 1.37 Black Cable	1
4.	MHF 4L Plug for OD: 1.37mm Cable: (20632-001R-37)	1

Vswr

Part Number	Insertion Loss		
MP005946	-0.7dB Max	-1dB Max.	
MP005947	-1dB Max	-1.45dB Max	
MP005948	-1.3dB Max.	-1.95dB Max.	

MP005946

MP005947

MP005948

Dimensions: Millimetres

100 ±3

200 ±3

300 ±3

114.6

214.6

314.6

Part Number Table

Recommended

Mounting Hole

Description	Part Number
RF / Coaxial Cable Assembly, 50Ω, RP SMA Bulkhead Jack to MHF4 Right Angle Plug, Black, 100mm, IP67	MP005946
RF / Coaxial Cable Assembly, 50Ω, RP SMA Bulkhead Jack to MHF4 Right Angle Plug, Black, 200mm, IP67	MP005947
RF / Coaxial Cable Assembly, 50Ω, RP SMA Bulkhead Jack to MHF4 Right Angle Plug, Black, 300mm, IP67	MP005948

Important Notice: This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro Farnell.com/multicomp-pro Element14.com/multicomp-pro

