

## **Features**

- Push-pull latching system
- Chrome plated Brass
- IP68
- 360° Screening for full EMC shielding

## **RS PRO Industrial Circular Connectors**

RS Stock No.: 2406582



RS PRO is the own brand of RS. The RS PRO Seal of Approval is your assurance of professional quality, a guarantee that every part is rigorously tested, inspected, and audited against demanding standards. Making RS PRO the Smart Choice for our customers.



### **Product Description**

RS Pro's range of waterproof Chrome plated Brass push-pull locking connectors offer exceptional quality that is found in many cutting-edge connectors, including an IP68 rating and full 360° EMC shielding with a high mating life. As has become standard within the RS Pro brand you can expect high quality products but at a reasonable price. These connectors are ideal for use in medical devices, testing equipment, audio equipment and other high-end applications.

### **General Specifications**

Number of Contacts	4					
Housing Material	Chrome Plated Brass					
Contact Material	Brass					
Contact Plating	Gold					
Contact Gender	Male					
Mating Type	Cable Mount					
Body Orientation	Straight					
Contact Carrier	PPS					
Mating Cycles	>5,000					
Colour	Natural					
Application	Instrumentation, Process control, Robotics, Assembly lines and manufacturing, Factory automation, Industrial production and automation, Medical devices					

### **Electrical Specifications**

Plug/Socket	Socket
Current Rating	12A
Test Voltage Contact-Shell k/vAC	1.80
Test Voltage Contact – Contact k/v AC	2.20

### **Mechanical Specifications**

Connector Size	2F
Termination Method	Solder
Mounting Type	Panel Mount
Cable Outer Diameter	6.7



### **Operation Environment Specifications**

Operating Temperature -55°C to +250°C

### **Protection Category**

IP Rating IP68

### **Approvals**

Compliance/Certifications RoHS, CE

## FOR MATING PARTS, SEE MATRIX:




### **RM-F Series 2F**

Plug Cable End			Panel Mount				In-Line Cable End			
RS Stock No.	No. of Contacts	Gender	Mates With	RS Stock No.	No. of Contacts	Gender		RS Stock No.	No. of Contacts	Gender
2406580	2	Male		2406427	2	Female	Or	2406511	2	Female
2406581	3	Male		2406428	3	Female		2406512	3	Female
2406582	4	Male		2406429	4	Female	40	2406513	4	Female
2406583	6	Male		2406430	6	Female		2406514	6	Female
2406584	8	Male		2406431	8	Female		2406515	8	Female
2406585	1+8	Male		2406432	1+8	Female		2406516	1+8	Female
2406586	16	Male		2406433	16	Female		2406518	16	Female
2406587	19	Male	#25	2406434	19	Female	0.0	2406519	19	Female

The RS PRO Seal of Approval is only awarded after a rigorous quality process to demanding international standards.





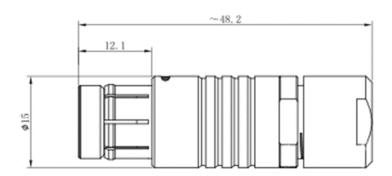

CONNECTOR SOLDER CUP VIEW

















2(\$1.6)

3(\$1.6)

4(\$1.3)

 $6(\phi 0.9)$ 

8 (\$0.9)

16(\$0.7)

19 (\$0.7)

26 (\$0.5)