## **Axial DC Fan** Vapo Bearing, 60mm × 60mm × 25mm





#### **Mechanical Characteristics**

Motor Design : Single phase, 4-poles Brushless DC motor

Bearing System : Vapo bearing system Dimensions : 60mm × 60mm × 25mm

Materials of Frame : Thermoplastic PBT of UL94V-0 Materials of Fan Blade : Thermoplastic PBT of UL94V-0

Direction of Rotation : Counter-Clockwise viewed from front of fan blade

Mounting Holes : Diameter 4.3mm in 8 holes

Weight : 45g

### **Electrical Characteristics**

Rated Voltage : 12V DC

Rated Current : 130mA / Max. 150mA Rated Power Consumption : 1.56W / Max. 1.8W Operating Voltage Range : 4.5V DC to 13.8V DC

Starting Voltage : 4.5V DC (25°C Power ON/OFF)

Operating Temperature Range : -10°C to +70°C Storage Temperature Range : -40°C to +70°C

#### **Performance Characteristics**

Rated Speed : 5200 RPM ±15% @ Rated Voltage

Air Flow : 27 CFM

Static Pressure : 0.31 Inch-H<sub>2</sub>O Acoustic Noise : 31.2 dB(A) Insulation Class : UL Class A

Insulation Resistance

: 10MΩ @ 500V DC between Internal Stator and Lead Wire (+) Plastic Housing

: Applied AC 500V for one minute or AC 600V for 2 Seconds Dielectric Strength

between Housing and Lead Wire (+)

Life Expectancy : 60,000 hours @ 40°C, 65% humidity, 90% CL

Protection : Automatic Restart

> Note: In a situation where the fan is locked by an external force while the electricity is on, an increase in coil temperature will be prevented by temporarily turning off the electrical power to the motor. The fan will automatically restart when the locked rotor

condition is released. Polarity Protection

#### Safety

UL	CUR	TUV	CE
E77551	E77551	✓	✓


Newark.com/exclusive-brands Farnell.com/exclusive-brands Element14.com/exclusive-brands




# Axial DC Fan Vapo Bearing, 60mm × 60mm × 25mm



#### **Performance Curve**



#### **Dimensions**

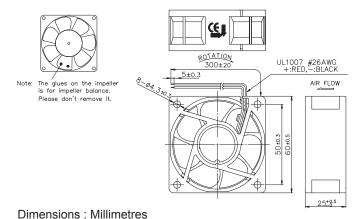

**Part Number Table** 

Description	Dimensions	Part Number
Axial DC Fan, 12V, Vapo, 5200 RPM, 2 Wires	60mm×60mm×25mm	MC011527

Important Notice: This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of Premier Farnell Limited 2019.

Newark.com/exclusive-brands Farnell.com/exclusive-brands Element14.com/exclusive-brands

