


Data sheet


chainflex® CF5



Control cable (Class 5.5.2.2) • For heavy duty applications • PVC outer jacket • Oil-resistant • Flame retardant

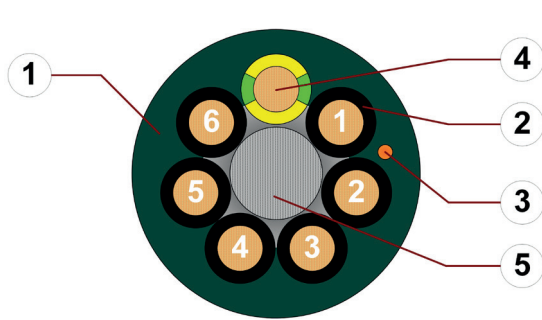

1. Outer jacket: Pressure extruded, gusset-filling, oil-resistant PVC mixture
2. Core insulation: Mechanically high-quality TPE or PVC mixture
3. CFRIP: Tear strip for faster cable stripping
4. Conductor: Fine-wire stranded conductor consisting of bare copper wires
5. Strain relief: Tensile stress-resistant centre element
6. 12 cores or more: Bundles with optimised pitch length and pitch direction



Example image
For detailed overview please see design table

Cable structure

	Conductor	Finely stranded conductor consisting of bare copper wires (following DIN EN 60228).
	Core insulation	Cores $\leq 0.5 \text{ mm}^2$: Mechanically high-quality TPE mixture. Cores $\geq 0.75 \text{ mm}^2$: Mechanically high-quality PVC mixture.
	Core structure	Number of cores < 12: Cores wound in a layer with short pitch length. Number of cores ≥ 12: Cores wound in bundles which are then wound around a high tensile strength centre element, all with optimised short pitch lengths and directions. Especially low-torsion structure.
	Core identification	Cores $\leq 0.34 \text{ mm}^2$: Colour code in accordance with DIN 47100. Cores $\geq 0.5 \text{ mm}^2$: Black cores with white numbers, one green-yellow core.
	Outer jacket	Low-adhesion, oil-resistant PVC mixture, adapted to suit the requirements in e-chains® (following DIN EN 50363-4-1). Colour: Moss green (similar to RAL 6005) Printing: white
	CFRIP®	Strip cables faster: a tear strip is moulded into the outer jacket Video ▶ www.igus.eu/CFRIP

„00000 m^{***} igus chainflex CF5.--.① ----② 300/500V E310776

cRUus AWM Style 2570 VW-1 AWM I/II A/B 80°C 600V FT1 EAC/CTP

CE RoHS-II conform www.igus.de +++ chainflex cable works +++

* **Length printing:** Not calibrated. Only intended as an orientation aid.
① / ② Cable identification according to Part No. (see technical table).
Example: ... chainflex ... CF5.02.36 ... 36x0.25 ... 300 V/500 V ...



Example image

Data sheet

chainflex® CF5









Control cable (Class 5.5.2.2) ● For heavy duty applications ● PVC outer jacket ● Oil-resistant ● Flame retardant



Example image
igus® chainflex® CF5

Dynamic information

	Bend radius	e-chain® linear flexible fixed	minimum 6.8 x d minimum 5 x d minimum 4 x d
	Temperature	e-chain® linear flexible fixed	+5 °C up to +70 °C -5 °C up to +70 °C (following DIN EN 60811-504) -15 °C up to +70 °C (following DIN EN 50305)
	v max.	unsupported gliding	10 m/s 5 m/s
	a max.		80 m/s ²
	Travel distance		Unsupported travels and up to 100 m for gliding applications, Class 5
	Torsion		± 90°, with 1 m cable length, Class 2



These values are based on specific applications or tests. They do not represent the limit of what is technically feasible.

Guaranteed service life according to guarantee conditions

Double strokes	5 million		7.5 million		10 million	
	< 10 m	≥ 10 m	< 10 m	≥ 10 m	< 10 m	≥ 10 m
Temperature, from/to [°C]	R min. [factor x d]	R min. [factor x d]	R min. [factor x d]	R min. [factor x d]	R min. [factor x d]	R min. [factor x d]
+5/+15	7.5	10	8.5	11	9.5	12
+15/+60	6.8	7.5	7.8	8.5	8.8	9.5
+60/+70	7.5	10	8.5	11	9.5	12

Minimum guaranteed service life of the cable under the specified conditions.
The installation of the cable is recommended within the middle temperature range.

Electrical information

	Nominal voltage	300/500 V (following DIN VDE 0298-3)
	Testing voltage	2000 V (following DIN EN 50395)



Data sheet

chainflex® CF5















Control cable (Class 5.5.2.2) ● For heavy duty applications ● PVC outer jacket ● Oil-resistant ● Flame retardant



Example image

Properties and approvals

	UV resistance	Medium
	Oil resistance	Oil-resistant (following DIN EN 50363-4-1), Class 2
	Flame retardant	According to IEC 60332-1-2, CEI 20-35, FT1, WW-1
	Silicone-free	Free from silicone which can affect paint adhesion (following PV 3.10.7 – status 1992)
	UL/CSA	Cores < 0.5 mm²: Style 10492 and 2570, 600 V, 80 °C Cores ≥ 0.5 mm²: Style 11113 and 2570, 600 V, 80 °C
	NFPA	Following NFPA 79-2012, chapter 12.9
	EAC	Certificate No. RU C-DE.ME77.B.01254 (TR ZU)
	CTP	Certificate No. C-DE.PB49.B.00416 (Fire protection)
	CEI	Following CEI 20-35
	Lead-free	Following 2011/65/EC (RoHS-II)
	Clean room	According to ISO Class 2, material/cable tested by IPA according to ISO standard 14644-1
	CE	Following 2014/35/EU



Data sheet

chainflex® CF5




Control cable (Class 5.5.2.2) ● For heavy duty applications ● PVC outer jacket ● Oil-resistant
● Flame retardant



Example image

Typical lab test setup for this cable series

Test bend radius R	approx. 38 - 200 mm
Test travel S	approx. 1 - 15 m
Test duration	minimum 2 - 4 million double strokes
Test speed	approx. 0.5 - 2 m / s
Test acceleration	approx. 0.5 - 1.5 m / s ²

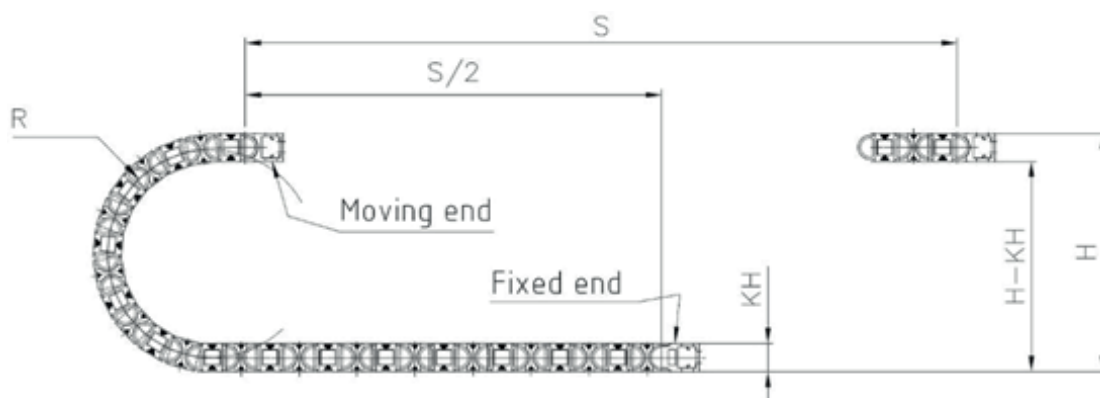

Typical application areas

- For heavy duty applications, Class 5
- Unsupported travel distances and up to 100 m for gliding applications, Class 5
- Light oil influence, Class 2
- Torsion $\pm 90^\circ$, with 1 m cable length, Class 2
- Preferably indoor applications, but also outdoor ones at temperatures $> 5^\circ\text{C}$
- Storage and retrieval units for high-bay warehouses, machining units/package machines, quick handling, indoor cranes



Data sheet

chainflex® CF5



Control cable (Class 5.5.2.2) ● For heavy duty applications ● PVC outer jacket ● Oil-resistant
● Flame retardant



Example image

Technical tables:

Mechanical information

Part No.	Number of cores and conductor nominal cross section [mm²]	Outer diameter (d) max. [mm]	Copper index [kg/km]	Weight [kg/km]
CF5.02.36	36x0.25	15.0	99	209
CF5.03.15	15x0.34	11.0	55	123
CF5.03.18	18x0.34	12.0	67	142
CF5.03.25	25x0.34	14.0	92	203
CF5.05.02	2x0.5	6.0	10	38
CF5.05.03	3G0.5	6.0	16	41
CF5.05.05	5G0.5	7.0	25	73
CF5.05.07	7G0.5	8.0	36	78
CF5.05.12	12G0.5	11.0	60	131
CF5.05.18	18G0.5	13.0	90	190
CF5.05.25	25G0.5	16.0	124	281
CF5.05.30	30G0.5	18.0	149	407
CF5.07.03	3G0.75	6.5	23	54
CF5.07.04	4G0.75	7.0	31	67
CF5.07.05	5G0.75	7.5	39	82
CF5.07.07	7G0.75	9.0	55	115
CF5.07.12	12G0.75	12.5	90	189
CF5.07.18	18G0.75	15.0	134	269
CF5.07.25	25G0.75	17.5	190	384
CF5.07.36	36G0.75	22.0	267	587
CF5.07.42	42G0.75	24.0	312	637
CF5.10.03	3G1.0	6.5	30	56
CF5.10.04	4G1.0	7.0	40	78
CF5.10.05	5G1.0	8.0	50	94
CF5.10.07	7G1.0	9.5	74	130
CF5.10.12	12G1.0	13.0	119	227
CF5.10.18	18G1.0	16.5	179	306
CF5.10.25	25G1.0	19.5	248	487

Note: The given outer diameters are maximum values and may tend toward lower tolerance limits.
G = with green-yellow earth core x = without earth core



Data sheet

chainflex® CF5



Control cable (Class 5.5.2.2) ● For heavy duty applications ● PVC outer jacket ● Oil-resistant
● Flame retardant



Example image

Part No.	Number of cores and conductor nominal cross section [mm ²]	Outer diameter (d) max. [mm]	Copper index [kg/km]	Weight [kg/km]
CF5.15.03	3G1.5	7.5	45	83
CF5.15.04	4G1.5	8.0	60	105
CF5.15.05	5G1.5	9.0	74	127
CF5.15.07 ¹⁷⁾	7G1.5	10.5	105	180
CF5.15.12	12G1.5	15.0	179	264
CF5.15.18	18G1.5	19.5	267	478
CF5.15.25	25G1.5	21.5	371	645
CF5.15.36	36G1.5	26.5	529	960
CF5.25.04	4G2.5	10.0	96	170
CF5.25.05	5G2.5	11.0	120	200
CF5.25.07 ¹⁷⁾	7G2.5	13.0	169	279
CF5.25.12	12G2.5	18.5	284	480
CF5.25.18	18G2.5	23.5	427	765
CF5.25.25	25G2.5	27.5	591	1054

¹⁷⁾ When using the cables with "7 G 1.5 mm²" and "7 G 2.5 mm²" minimum bend radius must be 17.5 x d with gliding travel distance ≥ 5 m.

Note: The given outer diameters are maximum values and may tend toward lower tolerance limits.
G = with green-yellow earth core x = without earth core



Data sheet

chainflex® CF5



Control cable (Class 5.5.2.2) ● For heavy duty applications ● PVC outer jacket ● Oil-resistant
● Flame retardant



Example image

Electrical information

Conductor nominal cross section [mm ²]	Maximum conductor resistance at 20 °C (following DIN EN 50289-1-2) [Ω/km]	Maximum current rating at 30 °C (following DIN VDE 0298-4) [A]
0.25	79.0	5
0.34	57.0	7
0.5	39.0	10
0.75	26.0	12
1	19.5	15
1.5	13.3	18
2.5	8.0	26

The final maximum current rating depends among other things on the ambient conditions, the type of the installation and the number of loaded cores.



Data sheet

chainflex® CF5



Control cable (Class 5.5.2.2) ● For heavy duty applications ● PVC outer jacket ● Oil-resistant ● Flame retardant



Design table

Part No.	Number of cores	Core design	Part No.	Number of cores	Core design
CF5.XX.02	2		CF5.XX.15	5x3	
CF5.XX.03	3		CF5.XX.18	6x3	
CF5.XX.04	4		CF5.XX.25	5x5	
CF5.XX.05	5		CF5.XX.30	6x5	
CF5.XX.07	7		CF5.XX.36	6x6	
CF5.XX.12	4x3		CF5.XX.42	7x6	



Example image

igus® chainflex® CF5

Data sheet

chainflex® CF5



Control cable (Class 5.5.2.2) ● For heavy duty applications ● PVC outer jacket ● Oil-resistant
● Flame retardant



Example image

Colour code in accordance with DIN 47100.

Conductor no.	Colours according to DIN ISO 47100	Conductor no.	Colours according to DIN ISO 47100	Conductor no.	Colours according to DIN ISO 47100
1	white	22	brown-blue	43	blue-black
2	brown	23	white-red	44	red-black
3	green	24	brown-red	45	white-brown-black
4	yellow	25	white-black	46	yellow-green-black
5	grey	26	brown-black	47	grey-pink-black
6	pink	27	grey-green	48	red-blue-black
7	blue	28	yellow-grey	49	white-green-black
8	red	29	pink-green	50	brown-green-black
9	black	30	yellow-pink	51	white-yellow-black
10	violet	31	green-blue	52	yellow-brown-black
11	grey-pink	32	yellow-blue	53	white-grey-black
12	red-blue	33	green-red	54	grey-brown-black
13	white-green	34	yellow-red	55	white-pink-black
14	brown-green	35	green-black	56	pink-brown-black
15	white-yellow	36	yellow-black	57	white-blue-black
16	brown-yellow	37	grey-blue	58	brown-blue-black
17	white-grey	38	pink-blue	59	white-red-black
18	brown-grey	39	grey-red	60	brown-red-black
19	white-pink	40	pink-red	61	black-white
20	white-brown	41	grey-black		
21	white-blue	42	pink-black		

