




Datasheet

Stock No: 811-1473

ENGLISH

## RS Pro Green/Yellow Tri-rated Cable, PVC

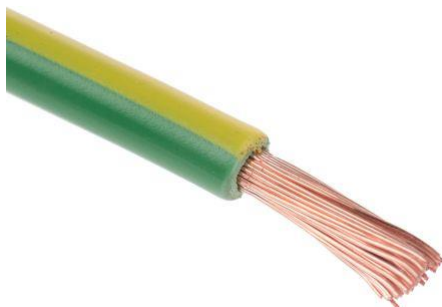

### Description:

RS Pro offer a range of PVC insulated flexible panel wires which are manufactured and recognised/certified as appropriate to the following standards:



#### Underwriters Laboratories (UL)

Recognised to Style 1015, 1028, 1283 or 1284 (depending on wire size)

Rated

- 105°C in air
- 60°C in oil
- 600V



#### Canadian Standards Association (CSA):

Certified to Type TEW 105°C



#### British Standard

Manufactured to BS6231 Type CK

Applications include the wiring of switch, control metering, relay and instrument panels or power switchgear as well as internal connections in rectifier equipment and in motor starters and controllers.

The UL and CSA certification on these wires enable their use in equipment destined for the North American market as well as the European market. This gives the benefit of simple design and manufacturing and less stockholding, compared to the alternative of using wires manufactured to the separate standards.



All wires are printed or embossed at regular intervals along their length with the following information:

UL recognition logo; AWM style no; 105°C 600V VW-1; AWG size; CSA TEW 105°C FT1; BS6231; mm<sup>2</sup> size

## Technical Information

Conductors:	Plain annealed copper, Class 5 to BS EN 60288
Insulation:	Heat Resisting PVC
Voltage Rating:	600V between conductor and earth, 1000V between conductors
Max. Conductor Temp:	105°C in air, 60°C in oil
Min bend radius:	6 x overall diameter

### TECHNICAL INFORMATION

Conductors:	Plain annealed copper, Class 5 to BS EN 60228.
Insulation:	Heat Resisting PVC.
Voltage Rating:	600V between conductor and earth, 1000V between conductors.
Max. Conductor Temp:	105°C in air, 60°C in oil.
Min. bend radius:	6 x overall diameter.

AWM Size	Size (mm <sup>2</sup> )	Max diam of wires in conductor mm	Maximum resistance at 20°C $\Omega$ /Km	UL Style	Nominal R/T(mm)	Nominal Diam (mm)	Current Rating (A)	Weight (Kg/km)
22	0.5	0.21	39.0	1015	0.8	2.6	11	11
20	0.75	0.21	26.0	1015	0.8	2.8	14	14
18	1	0.21	19.5	1015	0.8	3	17	17
16	1.5	0.26	13.3	1015	0.8	3.3	21	22
14	2.5	0.26	7.98	1015	0.8	3.7	30	33
12	4	0.31	4.95	1015	0.8	4.3	41	49
10	6	0.295	3.30	1015	0.8	4.9	53	71
8	10	0.41	1.91	1028	1.2	6.8	75	124
6	16	0.41	1.21	1283	1.58	9.2	100	199
4	25	0.41	0.78	1283	1.58	10.6	136	290
2	35	0.41	0.554	1283	1.58	11.6	167	387
1	50	0.41	0.386	1284	2.1	14.4	190	570
2/0	70	0.51	0.272	1284	2.1	16.5	240	781
3/0	95	0.51	0.206	1284	2.1	18.7	300	1025
4/0	120	0.51	0.121	1284	2.1	20	340	1280

Current ratings are based on a conductor operating temperature of 85°C and an ambient air temperature of 45°C and are for a single panel wire in free air.