


FEATURES

- IP67
- 360° Shielding
- Pre-wired with 100, 200, 300, or 400 mm partially stripped cable
- 4, 5, 8 and 12 pole versions

RS PRO M12 MALE M16 x 1.5 REAR PANEL MOUNT SHIELDED CONNECTOR 8 PIN 2m BLACK PUR CABLE

RS Stock No:- 2305716

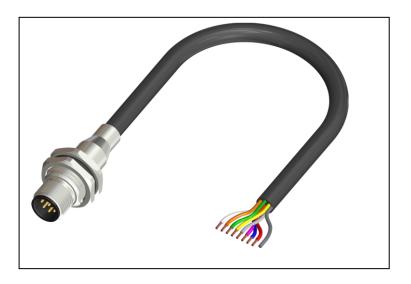

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has

RS PRO M12 PANEL MOUNT CONNECTOR



been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description ATTRIBUTE 1

M12 Connector M16 Clamp Nut

A series of RS Pro M12 panel-mounted connectors. Each connector within this range is supplied with a partially stripped 100 mm, 200 mm or 300 mm or customised length cable, making it perfect for your application. With IP67 rating and a durable nickel plated brass housing material, each connector is excellent within harsh environments. All models are highly reliable and excellent quality.

Features & Benefits

Contact Plating: Gold plated Supplied with a neoprene O-Ring

Number of poles: 8

Both Female and Male versions available

General Specifications

| Rated Operational Voltage | 30 V |
|---------------------------|------------------|
| Current Rating | 2A |
| Insulation Resistance | >= 100 MΩ |
| Temperature Range | -25°C +75°C |
| Coding | A-Coded |
| Coupling | Thread Locking |
| Shield | Yes |
| Mounting | Rear (M16 x 1.5) |

Material Specifications

| Housing Material | Brass Ni Plated |
|------------------|-----------------|
| Contact | Cu-Zn |
| Contact Plating | Gold Flash |
| Contact Carrier | Nylon 66 |
| O-Ring | Neoprene |
| No. of Pole | 8 |
| Clamp Nut | M16 x 1.5 |

Cable Specifications

RS PRO M12 PANEL MOUNT CONNECTOR



| Cable Length-L | 2 mm |
|-----------------------|-------------------------|
| Cable Type | 8 Core PUR Multi Strand |
| Sheath Color | Black |
| Cross Section of Wire | 0.25 sq. mm |
| Core Dia | 1.2 mm |
| Cable Dia | 6.0 ± 0.1 mm |
| Termination | Partially Stripped |

Protection Category

| Degree of Protection | IP67 |
|----------------------|------|
|----------------------|------|

Additional Information

| Custom Tariff Number | 85369090 |
|----------------------|----------|
| Oustoin raini Nambei | 85509090 |


Approvals

| Standards Met | IEC 61076-2-101 |
|---------------|-----------------|
|---------------|-----------------|

Similar Products

| Stock No. | Brand | Product Name | Attribute 1 | Attribute 2 |
|-----------|--------|-------------------------|----------------|------------------------|
| 2305718 | | M12 Male Rear Panel | M12 Panel | M12 Rear Panel Mount |
| | RS PRO | Mount 8 pin 5m Shielded | Connector Rear | 8 Pole Male 5m 0.25 sq |
| | | Cable | M16 x 1.5 mm | mm cable |

Connection Diagrams / Assembly Diagrams / Illustrations / Accessories

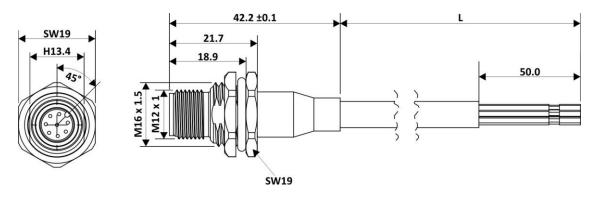



All Dimensions are in mm.

Panel Cutout

