

Range datasheet


RS Pro Cylindrical Female - Foot Anti-Vibration Mounts



Product Details -

FEMALE - FOOT/BUMP STOP Cylindrical mounts, a simple and cost effective mount. For use in compression and shear. A very large range of available size

Line Drawing -

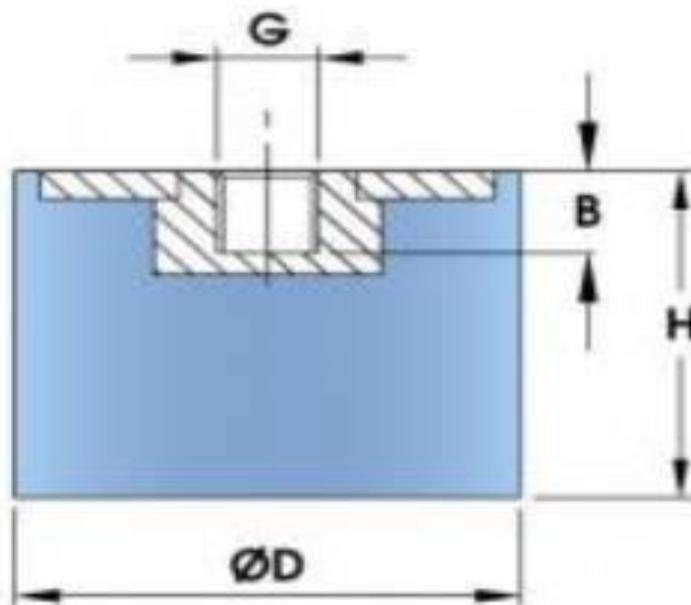



Range Table:

RS Code	Metal type	Rubber	Hardness	D (mm)	H (mm)	GxB (mm)	Max. Compression Load
1265945	Zinc plated steel	Natural Rubber	60 Shore A		15	15 M4x4	12kg
1265946	Zinc plated steel	Natural Rubber	45 Shore A		16	10 M4x4	15kg
1265947	Zinc plated steel	Natural Rubber	60 Shore A		20	15 M6x6	24.6kg
1265948	Zinc plated steel	Natural Rubber	60 Shore A		20	17 M5x5	23.6kg
1263932	Stainless steel grade 304	Silicone Rubber	45 Shore A		20	20 M6x6	18.8kg
1265949	Zinc plated steel	Natural Rubber	60 Shore A		20	25 M6x6	21kg
1265950	Zinc plated steel	Natural Rubber	60 Shore A		20	30 M6x6	20.4kg
1265951	Zinc plated steel	Natural Rubber	50 Shore A		25	15 M8x8	27.3kg
1265952	Zinc plated steel	Natural Rubber	60 Shore A		25	22 M8x8	35.6kg
1265953	Zinc plated steel	Natural Rubber	50 Shore A		30	20 M8x8	37.47kg
1265954	Zinc plated steel	Natural Rubber	45 Shore A		30	22 M8x8	27kg
1265955	Zinc plated steel	Natural Rubber	45 Shore A		30	40 M6x6	23.3kg
1265956	Zinc plated steel	Natural Rubber	55 Shore A		40	15 M6x6	113.6kg
1263933	Stainless steel grade 304	Natural Rubber	55 Shore A		40	20 M8x8	101.12kg
1263934	Stainless steel grade 316	Natural Rubber	55 Shore A		40	25 M10x10	86.4kg
1265968	Zinc plated steel	Natural Rubber	50 Shore A		40	35 M8x8	58.42kg
1265969	Zinc plated steel	Natural Rubber	60 Shore A		50	15 M10x10	306kg
1266369	Zinc plated steel	Natural Rubber	60 Shore A		50	35 M10x10	154.8kg
1263547	Zinc plated steel	Natural Rubber	55 Shore A		75	55 M12x12	270.24kg