

serie/series:

INDUSTRIAL

PRV - PRB

COMPRESSORI INDUSTRIALI - BISTADIO TRASMISSIONE A CINGHIA - LUBRIFICATI
 OIL-LUBRICATED - DOUBLE-STAGE INDUSTRIAL COMPRESSORS WITH BELT DRIVE
 COMPRESSEURS INDUSTRIELS - DEUX STADE ENTRAÎNEMENT PAR COURROIE - LUBRIFIÉS
 HOCHPROFESIONELLE ZWEISTUFIG VERDICHTER RIEMENANTRIEB - MIT SCHMIERSYSTEM
 COMPRESORES INDUSTRIALES - DE DOS ETAPAS TRANSMISIÓN DE CORREA - LUBRICADOS


COMPRESSORI A BASSI REGIMI DI ROTAZIONE DA 850 A 1000 RPM(G/MIN)
 COMPRESSORS AT LOW SPEEDS OF ROTATION FROM 850 TO 1000 RPM (G/MIN)
 COMPRESSEURS À MARCHE LENTE DE ROTATION DE 850 À 1000 RPM (G / MIN)
 COMPRESORES A BAJAS VELOCIDADES DE ROTACIÓN DE 850 A 1000 RPM (G / MIN)
 KOMPRESSOREN BEI NIEDRIGEN DREHZAHLEN VON 850 BIS 1000 RPM (G / MIN)



SERIE/SERIES PRV

CARATTERISTICHE TECNICHE - TECHNICAL DATA SERIE/SERIES PRV

COD	TYPE	Liters	Cil	lt/min	CFM	m³/h	bar	psi	Hp/Cv	kW	Volt/ph	r p m	Kg	Lbs	A x B x h
19007	PRV 270/5.5TF	270 V	2B	650	23	39	10	143	5,5	4	400/3	900	170	374	90x63x195
19008	PRV 270/7.5TF	270 V	2B	830	30	49,8	10	143	7,5	5,5	400/3	1000	185	407	90x63x195
19008.1	PRV 270/7.5TF ST	270 V	2B	830	30	49,8	10	143	7,5	5,5	400/3	1000	200	440	90x63x195
19009	PRV 270/10TF	270 V	2B	1210	42,7	72,6	10	143	10	7,5	400/3	950	215	473	90x63x195
19009.1	PRV 270/10TF ST	270 V	2B	1210	42,7	72,6	10	143	10	7,5	400/3	950	230	506	90x63x195
19010.1	PRV 270/15TF ST	270 V	2B	1390	48,6	83,4	10	143	15	11	400/3	1100	266	585	90x63x195

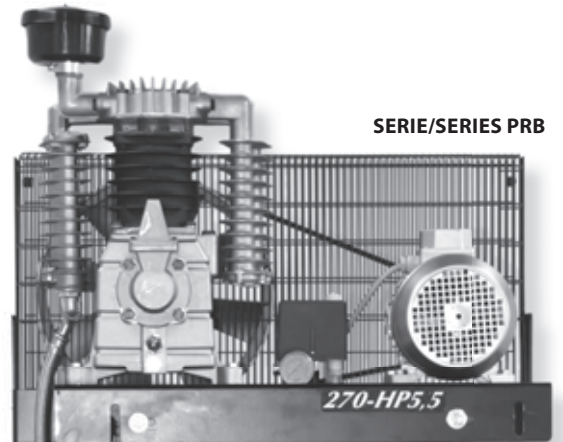

SERIE/SERIES PRB

CARATTERISTICHE TECNICHE - TECHNICAL DATA SERIE/SERIES PRB

COD	TYPE	Liters	Cil	lt/min	CFM	m³/h	bar	psi	Hp/Cv	kW	Volt/ph	r p m	Kg	Lbs	A x B x h
10107	PRB 5.5/T	-	2B	650	23	39	10	143	5,5	4	400/3	900	69	152	105x55x65
10108	PRB 7.5/T	-	2B	830	30	49,8	10	143	7,5	5,5	400/3	1000	79	174	105x55x65
10109	PRB 7.5/TST	-	2B	830	30	49,8	10	143	7,5	5,5	400/3	1000	85	187	105x55x65
10110	PRB 10/T	-	2B	1210	42,7	72,6	10	143	10	7,5	400/3	950	114	251	105x55x65
10111	PRB 10/TST	-	2B	1210	42,7	72,6	10	143	10	7,5	400/3	950	129	284	105x55x65