


## FEATURES

- Flexible, even at low temperatures
- Excellent resistance to tear and fatigue
- High resistance to abrasion
- Good tensile strength
- Good resistance to dilute acids and bases
- Excellent water resistance

## RS PRO 3 Core 1 mm<sup>2</sup> Mains Power Cable, Black Rubber Sheath 50m, 13.5 A 300 V, 500 V, 318TRS H05RR-F

RS Stock No.: 536-243

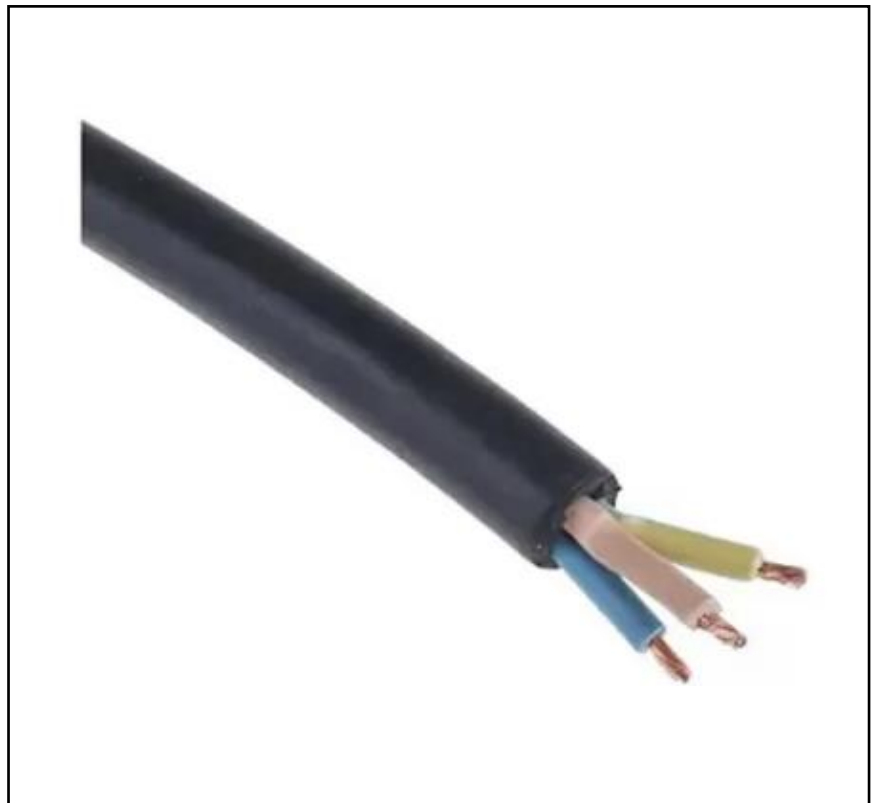

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

## Product Description

From RS PRO a high-quality, durable and lightweight H05RR-F harmonised flexible mains power cable with rubber insulation and outer jacket. This power cable has a voltage rating of 300 to 500 V and is ideal for providing power to small portable domestic and industrial appliances.

## General Specifications

<b>Type</b>	318TRS
<b>Harmonised Code</b>	H05RR-F
<b>Cable Shape</b>	Multicore
<b>Sheath Material</b>	Rubber
<b>Screened/Unscreened</b>	Unscreened
<b>Applications</b>	Household and kitchen appliances such as irons, vacuum cleaners and toasters, Handheld and portable devices such as radios, Office equipment such as air conditioning fans, Lightweight hand and workshop tools such as soldering irons, Suitable for fixed installation in partition walls, furniture and in hollow spaces of prefabricated building parts

## Electrical Specifications

<b>Current Rating</b>	13.5A
<b>Voltage Rating</b>	300 V, 500 V
<b>Insulation Material</b>	Rubber
<b>Conductor Material</b>	Copper
<b>Drain Wire</b>	Yes

## Mechanical Specifications

<b>Length</b>	50m
<b>Cross Sectional Area</b>	1 mm <sup>2</sup>
<b>American Wire Gauge</b>	17AWG
<b>Outer Diameter</b>	8.5mm
<b>Number of Cores</b>	3
<b>Conductor Strand Type</b>	Solid

## Operation Environment Specifications

<b>Operating Temperature Range</b>	-25°C to +60°C
<b>Minimum Operating Temperature</b>	-25°C
<b>Maximum Operating Temperature</b>	+60°C

## Approvals

<b>Compliance/Certifications</b>	RoHS Compliant
<b>Standards Met</b>	BS EN 60228, BS EN 50363, RoHS, CE, VDE 0282, VDE 0472, GB/T5013

