

# DRK Insulated Ring Terminal ( Vinyl )

Section: 0.5 ~ 1.5mm<sup>2</sup>( AWG 22~16)

I<sub>max</sub>=19A

0.7mm



ITEMNO	DIMENSION							color
	No. bolt	Bolt	B	L	F	H	Dφ	
		d2φ	mm	mm	mm	mm	mm	
RV 1.25-3	#4	3.2mm	5.7	17.8	4.95	10.0	4.3	red
RV1.25-3.5S	#6	3.7mm	5.7	17.8	4.95			
RV1.25-3.5M	#6	3.7mm	6.6	20.1	6.3			
RV1.25-3.5L	#6	3.7mm	7.2	21.2	7.0			
RV1.25-4S	#8	4.3mm	6.6	20.1	6.3			
RV1.25-4L	#8	4.3mm	8.0	21.5	7.0			
RV1.25-5S	#10	5.3mm	8.0	21.5	7.0			
RV1.25-5L	#10	5.3mm	9.5	23.3	8.0			
RV1.25-5LL	#10	5.3mm	11.6	27.5	11.1			
RV1.25-6S	1/4	6.5mm	9.5	23	8.0			
RV1.25-6	1/4	6.5mm	11.6	27.5	11.1			
RV1.25-8	5/16	8.4mm	11.6	27.5	11.1			
RV1.25-8L	5/16	8.4mm	14.5	30.2	22.0			
RV1.25-10	3/8	10.5mm	13.6	31.6	13.9			
RV1.25-10L	3/8	10.5mm	19.2	35.0	16.0			
RV1.25-12	1/2	13.0mm	19.2	35.0	16.0			

Section: 1.5 ~ 2.5mm<sup>2</sup>( AWG 16~14)

I<sub>max</sub>=27A


0.8mm

ITEMNO	DIMENSION							color
	No. bolt	Bolt	B	L	F	H	Dφ	
		d2φ	mm	mm	mm	mm	mm	
RV 2-3	#4	3.2mm	6.6	17.8	4.3	10.0	4.9	blue
RV2-3.5S	#6	3.7mm	6.6	17.8	4.3			
RV2-3.5M	#6	3.7mm	6.6	21.0	7.0			
RV2-3.5L	#6	3.7mm	8.5	22.5	7.75			
RV 2-4S	#8	4.3mm	6.6	21.0	7.0			
RV 2-4L	#8	4.3mm	8.5	22.5	7.75			
RV 2-5S	#10	5.3mm	8.5	22.5	7.75			
RV 2-5L	#10	5.3mm	9.5	22.5	7.25			
RV 2-6S	1/4	6.5mm	9.5	25.0	10.0			
RV 2-6	1/4	6.5mm	12.0	27.6	11.0			
RV 2-8	5/16	8.4mm	12.0	27.6	11.0			
RV2-8L	5/16	8.4mm	14.5	30.2	22.0			
RV 2-10	3/8	10.5mm	13.6	30.2	13.9			
RV2-10L	3/8	10.5mm	19.2	35.0	16.0			
RV 2-12	1/2	13.0mm	19.2	35.0	16.0			

Section: 2.5 ~ 4mm<sup>2</sup>( AWG 14~12)

I<sub>max</sub>=37A

1.0mm

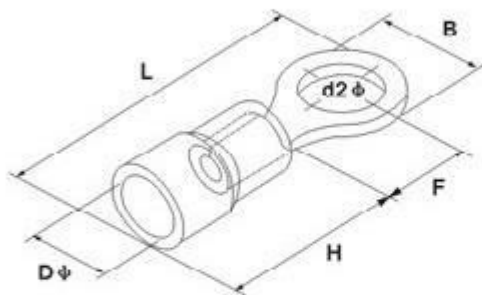

ITEMNO	DIMENSION							color
	No. bolt	Bolt	B	L	F	H	Dφ	
		d2φ	mm	mm	mm	mm	mm	
RV 3.5-4	#8	4.3mm	8.0	24.5	7.7	12.5	6.2	black
RV3.5-5S	#10	5.3mm	8.0	24.5	7.7			
RV3.5-5M	#10	5.3mm	9.5	25.5	8.3			
RV3.5-5L	#10	5.3mm	12.0	27.9	7.7			
RV 3.5-6	1/4	6.5mm	12.0	27.9	7.7			
RV 3.5-8	5/16	8.4mm	15.0	32.0	13.5			
RV 3.5-10	3/8	10.5mm	15.0	32.0	13.5			

Section: 4 ~ 6mm<sup>2</sup>( AWG 12~10)

I<sub>max</sub>=48A

1.0mm

ITEMNO	DIMENSION							color
	No. bolt	Bolt	B	L	F	H	Dφ	
		d2φ	mm	mm	mm	mm	mm	
RV 5.5-3.5	#6	3.7mm	7.2	21.4	5.9	12.5	6.7	yellow
RV 5.5-4S	#8	4.3mm	7.2	21.4	5.9			
RV 5.5-4L	#8	4.3mm	9.5	25.5	8.3			
RV 5.5-5	#10	5.3mm	9.5	25.5	8.3			
RV 5.5-6	1/4	6.5mm	12.0	30.0	11.0			
RV 5.5-8	5/16	8.4mm	15.0	33.7	13.7			
RV 5.5-10	3/8	10.5mm	15.0	33.7	13.7			
RV 5.5-12	1/2	13.0mm	19.2	38.1	16.0			