


# MIP22312

Enclosure, Resi9 MP, flush mounting, 3 rows of 12 modules, IP40, white door, 1 earth + 1 neutral terminal blocks

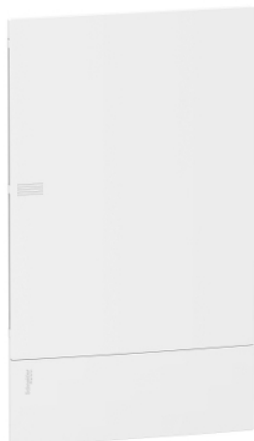

## Main

Range	Resi9
Product name	Resi9 MP
Product or component type	Enclosure
Enclosure type	Modular enclosure
Nb of 18 mm modules per row	12
Nb of horizontal rows	3
Type of door	Plain
Width	270 Mm wall: 294 mm outside:
Height	478 Mm wall: 502 mm outside:
Depth	18 Mm outside: 80 Mm wall: 98 mm total:

## Complementary

Enclosure mounting	Flush
9 mm pitches	24
Total number of 18 mm modules	36
[In] rated current	63 A
Type of rail	35 mm asymmetrical rail
Mounting plate description	Without mounting plate
Cable entry	Pre-cutted holes
Terminal block function	Earth / neutral
Number of terminal blocks	1 earth (screwed) with 20 outgoers 1 neutral (screwed) with 20 outgoers
Distribution block outgoers	2 x 16 mm <sup>2</sup> for earth 2 x 16 mm <sup>2</sup> for neutral 9 x 10 mm <sup>2</sup> for earth 9 x 10 mm <sup>2</sup> for neutral 9 x 6 mm <sup>2</sup> for earth 9 x 6 mm <sup>2</sup> for neutral
Enclosure material	Back part: technoplastic Door: technoplastic Front face: technoplastic
Internal depth	76 mm
Colour	Door: white (RAL 9003) Front face: white (RAL 9003)
Market segment	Residential Small commercial

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

## Environment

Standards	IEC 61439-1 IEC 61439-3 IEC 60670-1 IEC 60670-24
Quality labels	IMQ
Fire resistance	Door: 650 °C Back part: 650 °C Front face: 650 °C
IP degree of protection	IP40
IK degree of protection	IK07
Ambient air temperature for operation	-25...60 °C

## Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	9.000 cm
Package 1 Width	29.500 cm
Package 1 Length	50.000 cm
Package 1 Weight	1.950 kg
Unit Type of Package 2	CAR
Number of Units in Package 2	4
Package 2 Height	31.000 cm
Package 2 Width	39.500 cm
Package 2 Length	53.500 cm
Package 2 Weight	8.667 kg
Unit Type of Package 3	P12
Number of Units in Package 3	64
Package 3 Height	119.000 cm
Package 3 Width	80.000 cm
Package 3 Length	120.000 cm
Package 3 Weight	150.672 kg

## Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	<a href="#">REACH Declaration</a>
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
China RoHS Regulation	<a href="#">China RoHS Declaration</a>
RoHS exemption information	<a href="#">Yes</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
Halogen content performance	Halogen free product

## Contractual warranty

Warranty	18 months
----------	-----------