


## Datasheet




# 40 Way universal IDC Cable skt, 55.37mm L

RS Stock number [471-244](#)

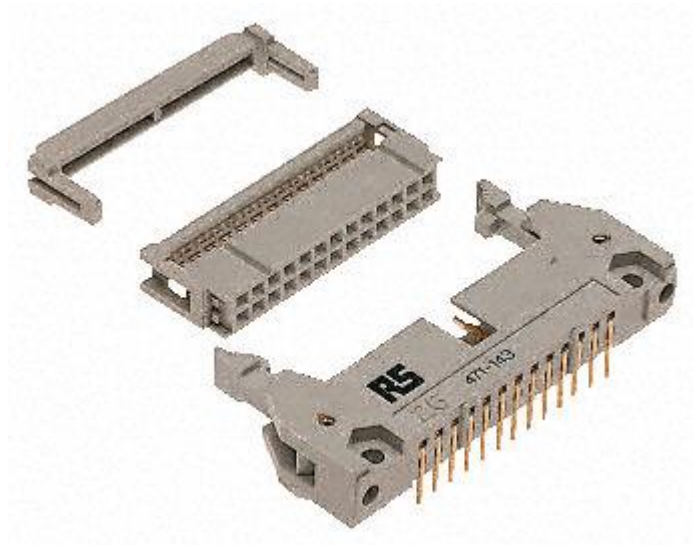

### Specifications:

Contact:	Phosphor bronze
Plating:	Gold plated over nickel
Insulator Material:	PBT & glass-fibre reinforced grey colour
Current rating:	1A dc Max.
Insulator Resistance:	1000M ohm min. at 500V dc
Contact Resistance:	30M ohm max. at 6V dc 300mA
Dielectric withstanding voltage:	500V ac for one minute
Operating Temperature:	-55°C ~ +105°C
Approval:	UL E163369

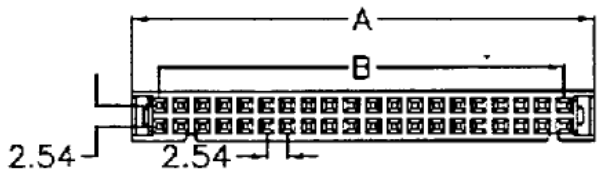

POSITION	A	B
6	12.18	5.08
8	14.72	7.62
10	17.26	10.16
12	19.80	12.70
14	22.34	15.24
16	24.88	17.78
20	29.96	22.86
24	35.04	27.94
26	37.58	30.48
30	42.66	35.56
34	47.74	40.64
36	50.28	43.18
40	55.36	48.26
44	60.44	53.34
50	68.06	60.96
56	75.68	68.58
60	80.76	73.66
62	83.30	76.20
64	85.84	78.74