

FEATURES

 Provide safety, reliability and are cost effective

RS PRO M6 x 16mm Shoulder Bolt

RS Stock No.: 292-293



RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.



Product Description

These hexagon socket shoulder screws feature a small cylindrical head with tall vertical sides. The socket screws are ideal when you have less room for wrenches. They have tall vertical sided means they also have space saving advantages.

Our RS Pro metric threaded socket head shoulder screws are produced in 12.9 grade black, self-colour steel.

General Specifications

Head Shape	Hex Socket Shoulder
Material	Steel
Finish	Plain
Thread Type	Metric
Applications	Manufacturing and repair of vehicles, Machine tooling, Machine production, Repair and general engineering, Domestic, Constructio,n industry

Mechanical Specifications

Thread Size	M6
Thread Pitch	1mm
Thread Length	11.25mm to 10.75mm
Length	16mm
Nominal Diameter	8mm
Shoulder Diameter	8mm
Shoulder Length	16mm
Head Diameter	13.27mm to 12.73mm
Head Height	5.5mm to 5.32mm



Mechanical Specifications


Thread Size	M6
Length	16mm
Shoulder Length	16mm
Thread Pitch	1mm
Shoulder Diameter	8mm

Approvals

Compliance/Certifications	Din 912/ISO 7380 standard
---------------------------	---------------------------





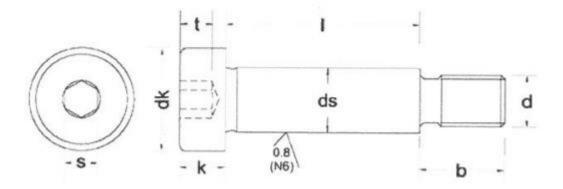

		6mm	8mm	10mm	12mm
	Nominal	6	8	10	12
ds	Max	5.990	7.987	9.987	11.984
	Min	5.960	7.951	9.951	11.941
d		M5	M6	M8	M10
Pitch		0.8	1	1.25	1.5
	Max	10.22	13.27	16.27	18.27
dk	Min	9.78	12.73	15.73	17.73
k	Max	4.5	5.5	7	8
	Min	4.32	5.32	6.78	7.78
	Nominal	3	4	5	6
S	Max	3.02	4.095	5.095	6.02
Mi	Min	3.08	4.02	5.02	6.095
t	Min	2.4	3.3	4.2	4.9
b	Max	9.75	11.25	13.25	16.40
	Min	9.25	10.75	12.75	15.60

1			
Nominal	Min	Max	
10	10	10.25	
12	12	12.25	
16	16	16.25	
20	20	20.25	
25	25	25.25	
30	30	30.25	
40	40	40.25	
50	50	50.25	
60	60	60.25	

Please view our full range listing below

RS Stock No	Size (mm)	RS Stock No	Size (mm)
292271	6mm (M5) x 10	292338	10mm (M8) x 25
399161	6mm (M5) x 12	292344	10mm (M8) x 30
399167	6mm (M5) x 16	292350	10mm (M8) x 40
292287	6mm (M5) x 20	292366	10mm (M8) x 60
399177	6mm (M5) x 30	292372	12mm (M10) x 16
399173	8mm (M6) x 12	8229316	12mm (M10) x 20
292293	8mm (M6) x 16	292388	12mm (M10) x 25
292300	8mm (M6) x 20	292394	12mm (M10) x 30
1247266	8mm (M6) x 50	292401	12mm (M10) x 40
1247267	10mm (M8) x 12	8229319	12mm (M10) x 50
292316	10mm (M8) x 16	292417	12mm (M10) x 60
292322	10mm (M8) x 20		The second secon